

14cmX8.5cm

3-in-1 Bluetooth GPS Data Logger


3-in-1 Bluetooth GPS Data Logger Quick Installation Guide

Thank you for purchasing 3-in-1 Bluetooth GPS Data Logger and we wish you have the best consumer product experience ever.

Main features :

- Adopt SkyTraq Venus 5 chipset with 44-Channel for fast acquisition and reacquisition
- High sensitivity (to -158dBm)
- Excellent performance - Cold/Warm/Hot start time: 40/35/1 sec. (average)
- Smart power saving / 14 hours usage
- Support standard NMEA0183
- Compatible with Bluetooth Serial Port Profile (SPP) in 10m wirelessly
- WAAS / EGNOS supported
- Capable of keeping up to 100,000 records or positions, including longitude, latitude, speed, UTC and tag data
- User friendly and powerful window based GPS Photo Tagger software

A. Standard Package 3-in-1 Bluetooth GPS Data Logger (1) + Lithium-Ion Rechargeable Battery (2) + Cigarette Adapter (3)
+ USB Cable (4) + Photo Tagger CD (5) + Anti-slide spacer (6) + Strap (7)

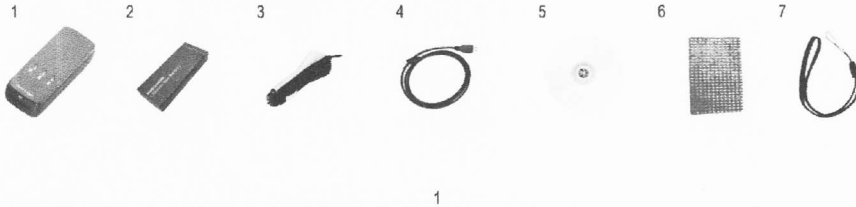


SkyTraq Venus 5

3-in-1 Bluetooth GPS Data Logger

44 channels

B. Appearance

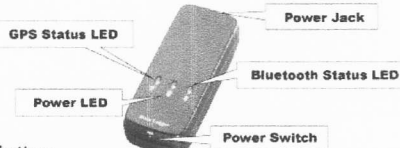

C. Charging your battery

For the first time using the 3-in-1 Bluetooth GPS Data Logger, please charge battery until it is fully charged. Take the USB cable and connect it to the power jack then connect another side to PC, Laptop or car cigarette adaptor. This will begin to charge the battery. Charging time is 3 hours typically.

- When the Power LED is blinking, battery power is low status. Please recharge.
- When the Power LED is steady on, the battery is under charging mode.
- When the Power LED is Off, the battery is fully charged.

D. Start to use(Bluetooth GPS Receiver Function)

D-1 Fully charge the battery when using at the first time

A fully charged battery can last for 14 hours continuously operation.

D-2 Activate the Bluetooth function in your PDA/Smart phone or PC

Before activating the Bluetooth function in your PDA/PC, please power on 3-in-1 Bluetooth GPS Data Logger for pairing and checking if your device is equipped with Bluetooth function. If not, you may need to acquire an optional CF/SD Bluetooth card or Bluetooth dongle.

NOTE: The pairing procedure is required to execute in the first time only And the pass code is "0000" if required.

D-3 Automatically create a shortcut in Bluetooth Manager window

After the pairing complete, the system will then find a quick connect device "BT GPS" in Bluetooth Manager. In further use, you just need to click it to connect to this Bluetooth GPS Receiver.

D-4 Check the Serial Port in Bluetooth Setting

After complete pairing with the Receiver, please click "Serial Port" to confirm the assigned COM port. If you use PDA/PC to pair the GPS Receiver, please check "Outbound COM port".

D-5 Set correct Serial Port in your map software

Activate your navigation software and make sure to select the correct "Serial Port".

NOTE: In the map software such as TomTom, you might need to change preference and set "Other Bluetooth GPS" or "Other Cable NMEA GPS" according to PDA/phone model. In some case please consult mapping software company to vary the setting if you have issue on positioning.

2

3-in-1 Bluetooth GPS Data Logger

3-in-1 Bluetooth GPS Data Logger

44 channels

E. Start to use(Data Logger & Photo Tagger Functions)

E-1 Save and Record the position data

When you turn on the power switch, the device starts to search the GPS signal. After the GPS position is fixed, it will begin to save and record the position data.

E-2 Insert the software utility software CD into your CD ROM driver

The installation program will start automatically. If the installation program did not start, please double click on "gpsPhoto Tagger_install.exe" on the CD to start it.

E-3 Turn on the device and then connect the device to PC USB Port

GPS Photo Tagger software will automatically detect the port and the baudrate. You may use the software utility to do the following functions, upload the recorded data, make configuration setting, change recording interval, exporting and mapping your recorded data. For more detail, please refer to the user manual on the CD.

F. OTHERS

F-1 LED Indicators

	LED Status	Flash	ON	OFF
1	Bluetooth (Blue)	Flashing for every 6 seconds (in pairing mode)	Connected	Not powered
2	Power (Red)	Low Power (Flashing for every 1 second)	Recharging (Red)	Sufficient Power (None)
3	GPS (Green)	Satellite Fixed	Connected	Bluetooth not connected

F-2 Manufacturing Setting

Protocol: NMEA 0183 - GGA, GSA, GSV, RMC
Baud Rate: 9,600 bps; Datum: WGS-84

F-3 GPS Features

SkyTraq Venus 5 GPS Receiver with super high sensitivity at -158dBm
Frequency: L1, 1575.42 MHz; C/A Code: 1.023 MHz chip rate
Acquisition time: Hot start 1 sec / Warm start 35 sec / Cold start 40 sec. (averaged)

F-4 Bluetooth Features

Bluetooth Version: V1.2 / SPP profile
Class 2 with 10 meters in open space

F-5 Flash Memory Features

Built-in flash memory: 8M Bits for data logging with 8 bytes binary data per record
Storage: up to 100K data records

F-6 Overall Features

Built-in rechargeable 650mAh Lithium-Ion battery (up to 12-14 hrs after fully charged)
Size: 70.0 (L) X 28.0 (W) X 20.0 (H) mm / Weight: 22.8 g (Battery excluded)

3

G. Trouble Shooting

Problems	Reasons	Methods
No position output but timer is counting	Weak or no GPS signal can be received at the place of the device	Find an open space for the device.
Execute fail	Bluetooth function unstable	Re-Start PDA or PC or re-install software
Can not turn on the COM port	Incompletely install the device or the COM port of the device is being used	Install the device completely or stop other device that is being used.
Can not find out the device	Poor connection	Re-Start PDA or PC and re-install software.
No Signal	No action for few minutes may cause the Pocket PC enter power saving mode. It may close the COM port at the same time.	Close the application and execute it again to re-open the COM port.
No Signal	Weak or no GPS signal when using the device indoor	Go outdoors to improve the poor GPS signal.

3