



Leviton Residential Intercom System

Door Strike Board

Cat. No. 47000-STR

DI-004-47000-01A

FEATURES

- Upgrades the Leviton Residential Intercom System with Door Strike capability
- Ease of wiring via patch cords into other modules
- Will support up to 4 door strikes with screw terminal connections
- Configurable set time delay

PACKAGE CONTENTS

- Strike Board
- 12V Power Supply
- 12" Patch Cord (1)

INSTALLATION

1. Mount the Door Strike board onto an available spot of the SMC mounting bracket.
2. Connect wires from door strike and strike power supply to the correct terminals on the terminal strip. Use terminal SW1 for door strike in zone 1, SW2 for door strike in zone 2, etc.
3. Adjust the jumper for connected zones to normally open (NO) or normally close (NC) as desired. "Normally open" refers to the contacts being open (and no current flowing) when the board is energized. Conversely, "normally closed" means the contacts are closed (with current flowing) when the board is energized. The contacts are rated for 1 Amp at 125VAC/30VDC.
4. Use the patch cord to connect output of the Intercom Main Controller board to the input of the Door Strike board.
5. Use the second patch cord to connect the output/aux of the Door Strike board to the input of the Intercom Interface board.

NOTE: It is important that the Door Strike module is connected DIRECTLY to the Intercom Main Controller board.

6. Set the dip switches according to the table below for the desired DTMF tone for activation and relay activation time.


NOTE: Chime board must be de-energized prior to changing settings.

NOTE: The LED will blink to indicate normal operation.

NOTE: Refer to Wiring Diagram on back page for wiring configuration.


Keypad #	Delay Time	Time		DTMF	
		Switch 1	Switch 2	Switch 3	Switch 4
7	5 sec	0	0	0	0
7	1 sec	0	0	0	1
7	3 sec	0	0	1	0
7	0.5 sec	0	0	1	1
5	5 sec	1	0	0	0
5	1 sec	1	0	0	1
5	3 sec	1	0	1	0
5	0.5 sec	1	0	1	1
0	5 sec	0	1	0	0
0	1 sec	0	1	0	1
0	3 sec	0	1	1	0
0	0.5 sec	0	1	1	1
*	5 sec	1	1	0	0
*	1 sec	1	1	0	1
*	3 sec	1	1	1	0
*	0.5 sec	1	1	1	1

0 = OFF (switch away from board), 1 = ON (switch pushed toward board)

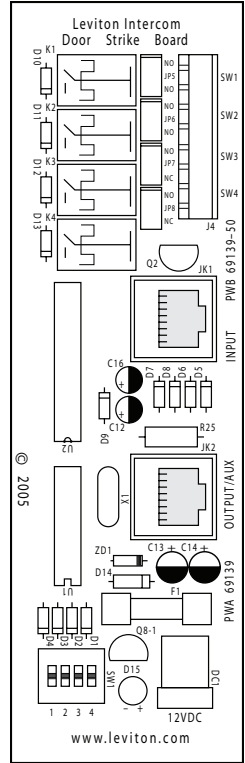

- Power module using power supply provided or jumper to PSA
- This module requires 12VDC
- Fuse is a 1 Amp 250V type GFE

WIRING DIAGRAM

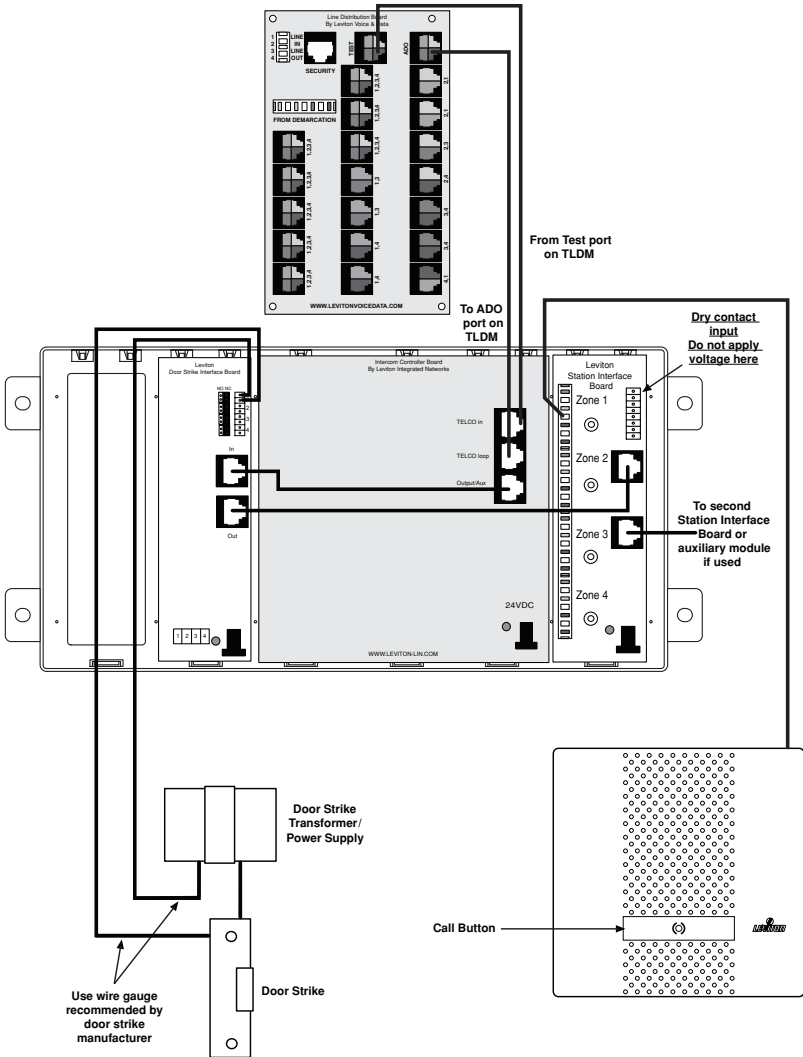


- For technical assistance contact us at **1-800-824-3005**
- Visit our website at **www.leviton.com**

LIMITED 2 YEAR WARRANTY AND EXCLUSIONS

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship under normal and proper use for two years from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option, if within such two year period the product is returned prepaid, with proof of purchase date, and a description of the problem to **Leviton Manufacturing Co., Inc., Att: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck, New York 11362-2591**. This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. **There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose**, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to two years. **Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delay or failure to perform this warranty obligation.** The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

FOLD SCHEME

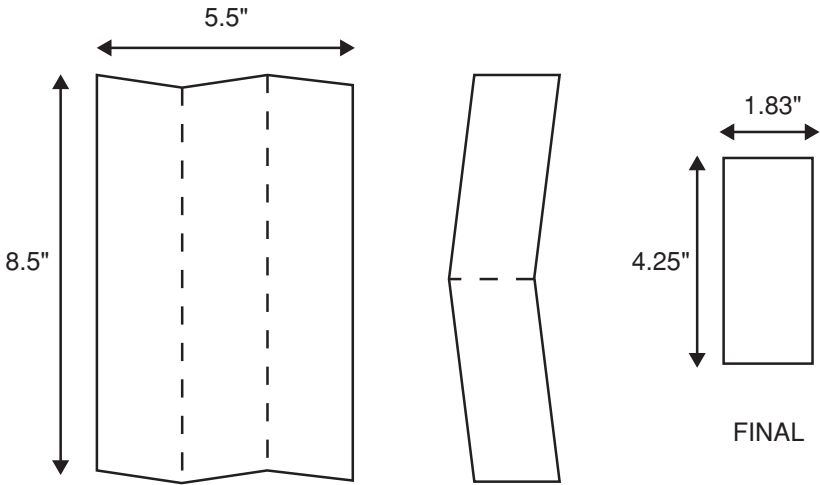

----- Fold Line

LEVITON INSTRUCTION SHEET/MANUAL SPECIFICATIONS

- Artwork No/Rev Level: DI-004-47000-01A
- Color(s): Black over
 1. _____
 2. _____
 3. _____
 4. _____
- Font Families: Helvetica
- Material
Type: 50 Lb. offset
- Coating: _____
- Paper size:
Overall size: 8.5" X 5.5"
Final fold size: 4.25" X 1.83"

DOCUMENTATION

- ECO No.: N/A
- Artist: H2D Date: 11/14/06

The information in this document is the exclusive PROPRIETARY property of LEVITON MANUFACTURING COMPANY, INC. It is disclosed with the understanding that acceptance or review by the recipient constitutes an undertaking by the recipient, (1) to hold this information in strict confidence, and (2) not to disclose, duplicate, copy, modify, or use the information for any purpose other than that for which disclosed.

Copyright © 1997 Leviton Mfg. Co. Inc.
Unpublished, All Rights Reserved