


I How to Open Your Keybox

Pre-set factory combination is: S P I
For security, please change your combination. See Section III and IV.



1) Spin to the right 3 times to clear.



3) Turn left past "S" then directly to "P" (second letter) and stop.



2) Stop on "S" (first letter).



4) Turn right directly to "I" (third letter) and stop.



5) Push button down and pull lid out from vault.

II Mounting and Assembly

First remove combination lid. See Section I for instructions.

Protective Cover:(sold separately)


- 1) Attach to Portable Model with the notches on top.
- 2) To remove, pull tabs at top of cover.

Permanent/Slimline Model:


Find a convenient flat surface. Mount with screws provided or choose an appropriate fastener for your application.

Portable Model:


- 1) Lift and hold the release tab located inside keybox.
- 2) Pull shackle up to release.
- 3) To re-latch, push shackle down.




Protective Cover




Permanent Keybox




Slimline

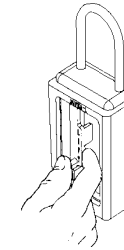

Portable Keybox



Automotive Keybox



Door Keybox

Automotive Model:

- 1) Partially lower window of vehicle door.
- 2) Hang bracket of keybox over top of the window.
- 3) Roll up window to secure the keybox.
- 4) Close and lock the vehicle door.

Door Model:

Hang bracket over the top or to the side of an entrance door at the hinge. Close and lock the door to secure the keybox.

III Choose Your Own Combination


Pre-set factory combination is S-P-I.
Select an easy to remember 3 letter combination and record it below. Don't use three identical letters. Don't use the initials of anyone living at this address or letters from your vehicle license plate.

_____	_____	_____
1st	2nd	3rd
Keep combination in a safe place.		


IV Setting Your Own Combination

Combination lid must be removed from the keybox before proceeding. See Section I for instructions.

- 1) Push both tabs down.
- 2) Pull back out.
- 3) Remove back from bottom slot.
- 4) Snap black release button all the way up.
- 5) Spin dial in any direction. The 3 lettered rings and the 2 metal spacers will drop from the lock.
- 6) Spin dial to line up all three pointers. Keep aligned during step #7.

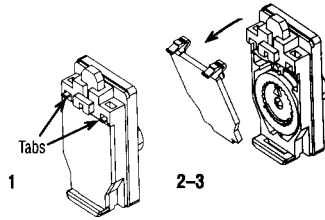

- 7) a. Place a lettered ring over the pointers at your first letter choice.
b. Next, place a metal spacer with short leg on the right.
c. Place a lettered ring over the pointers at your second letter choice.
d. Place the last spacer next with short leg on the right.
e. Place the last lettered ring over the pointer at your third letter choice.
- 8) Slide the bottom of the back into slot.
- 9) Snap lid closed by pressing between tabs. Tabs must snap fully into place to secure combination.

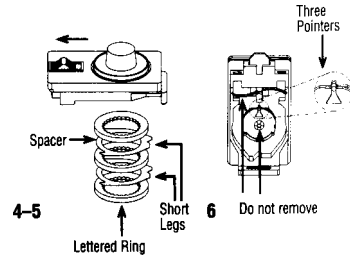


- 10) Before replacing the lid, try your new combination and push button down.

Important: The black button must remain down after dialing combination. If not, repeat Section IV.

To lock lid, you must push button up and spin dial.

See Section I for opening instructions. Warranty does not cover lost or incorrectly set combinations.

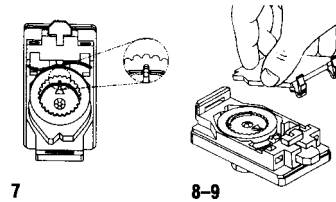

Limited Warranty

Disclaimer of Implied Warranty

Supra Products, P.O. Box 3167, 2611 Pringle Road SE, Salem, Oregon 97302 (Tel. 1-800-547-0252) ("Supra") warrants to the original buyer of its products for a period of one year after the date of purchase that the products are free from defects in workmanship and materials. Warranty will not cover forgotten or incorrectly set combinations. Supra will, without charge to the buyer, repair or replace, at its option, any defective product returned by the original buyer to Supra (at the buyer's cost) at its service and repair facilities located at the above address within one year of the date of purchase. The foregoing warranty does not cover damage caused by abuse or misuse and is the exclusive remedy for damage arising from defects in its products. Except to the extent prohibited by any applicable federal law, ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, ARE EXCLUDED.

As an accommodation, product items returned following expiration of the warranty period will be repaired, if in Supra's judgement repair is practicable, for a charge (\$12 minimum) covering parts, labor and shipping and/or returned to the buyer.

Limitation of Liability

Except to the extent that such limitation may be prohibited or limited by federal or state law, the foregoing repair/replacement remedy is the exclusive remedy for defects in products (i.e., this is an "AS IS" sale except for the foregoing warranty) and ALL OTHER LIABILITY, WHETHER BASED ON CONTRACT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE, AND ALL OTHER REMEDIES, AS WELL AS ALL COMMERCIAL, SPECIAL INCIDENTAL AND CONSEQUENTIAL DAMAGES, IS HEREBY EXCLUDED.



DIAL COMBINATION

Complete Instructions For Operating, Mounting & Changing Combinations

P/N 43363-01A