


Olight's SR95 is the newest generation of flashlights in the high-output Intimidator series. An advanced SST-90 LED generates an incredible 2,000 lumens, powered by a rechargeable lithium battery pack. With top of the line engineering and construction materials, the SR95 is optimized for heat dissipation while maintaining a comfortable, lightweight feel.

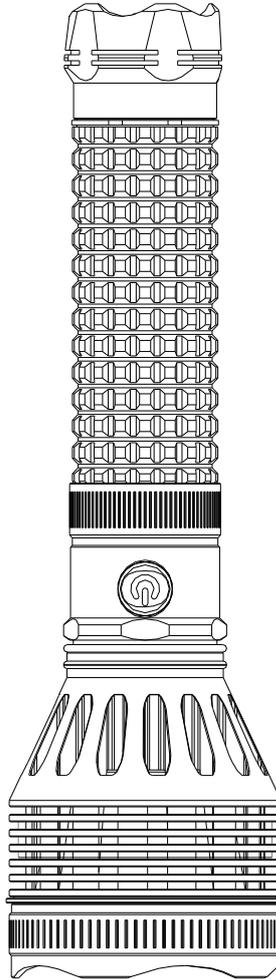

### Product Outline

- Equipped with the top grade LUMINUS SST-90 LED, the SR95 can reach 2,000 lumens.
- High-efficiency, large diameter reflector designed for throw reaches up to 720 meters.
- A large capacity 7800mAh 7.4V rechargeable lithium battery pack guarantees long runtimes and is compatible with Olight SR90/91/92 LED flashlights.
- Lightweight aluminum body with anti-slip knurling.
- Advanced design utilizes the head, as well as the reflector, to aid in heat dissipation.
- 18mm diameter power button ensures ease of use even using thick gloves or in adverse conditions.

### Specifications

---

Material:	Aluminum body with anti-scratching type III Hard Anodizing
-----------	--

---

Dimensions:	Length: 325mm, Head Diameter: 90mm Body Tube Diameter: 48.4mm
Weight:	1230.5g
Color:	Black
LED:	Luminus SST-90 LED
Battery:	7800mAh 7.4V rechargeable lithium battery
Charger:	AC 100~220V 50~60HZ input. Recharge under constant current and voltage) 3A/8.4V
Reflector:	Smooth reflector
Lens:	Tough ultra-clear tempering glass, with anti-reflective coating
Striking bezel:	Aluminum body with anti-scratching type III Hard Anodizing
Switch:	Side switch
O ring:	2 Gold plated, metal O rings
Tube body knurling:	Anti-slip knurling.
Output and Run Time:	High: 2000 lumens/ 110minutes; Medium: 600 lumens/9.5 hours; Low: 120 lumens/46 hours
Strobe mode:	10 Hertz Strobe
Beam intensity in center:	129,600 candela
Maximum throw:	720 meters
Waterproof rating:	IPX6
Impact resistance:	1.5 (meters)

**Production Time: Estimated available late May, 2012**

### **Operating Instructions**

**Momentary On:** Press power button for 1 second, the SR95 will engage until button is released.

**Memory:** Light will activate most recent output brightness when turned on.

**Mode Selection:** Press and hold the power switch when On to change the output brightness among three available levels.

**Strobe:** Double-click the power switch to activate the strobe function. Once engaged, a single tap will turn the light off while a 1 second hold will bring the light back to a constant On.

**Lock-out function:** The flashlight can be locked to keep from unintentional activation. Cycle through "Low-Middle-High" 3 times to temporarily deactivate the power switch. To unlock, click the switch three times or reload the battery pack.

**Charging :** AC and DC compatible. The red indicator light shows that the battery pack is charging. The green light shows a full charge. When the charger is not properly connected with battery pack, the indicator will

show a green light.

**Power Indication:** Press the power indicator button at the tail to see power status. 4 Green bars indicate high power; fewer bars mean less; no bars means power shortage (need to recharge immediately)

*Note: Please disconnect the power after finishing a charge, and remember to disconnect the charger from the flashlight.*

**Includes**

SR95 LED Flashlight

Carrying Strap

AC charger

Power cable for charger

User Manual

Warranty card