

How to use an in-line LG-2MSJ LineGrabber™ with a wall phone.

LG-WPA ADAPTER HOUSING INSTALLATION INSTRUCTIONS



Step 1:


Remove Wall Phone. Remove handset from the base of the phone and push up on the phone base, and pull it away from the wall. On some phones, you must pull out a locking lever before you can remove the phone.

Step 2:

Plug into Wall Jack, the short line cord from the LG-2MSJ LineGrabber™ wall receptacle.

Step 3:

Place the LG-WPA Adapter over existing wall outlet (aligning keyhole mounting slots with mounting pegs on existing wall plate) then pull adapter down into place. On many wall plates, the phone mounting pegs can be adjusted for a better or more secure fit.

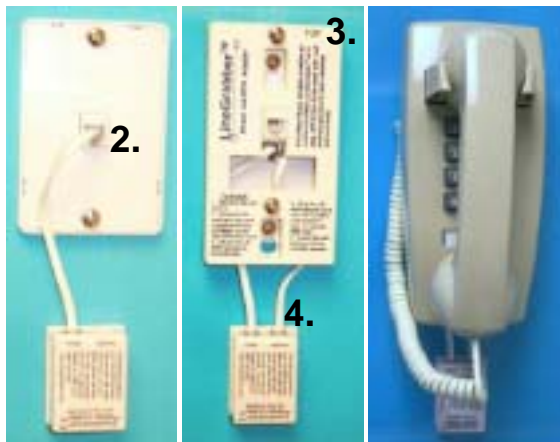

Step 4:


Plug the LG-WPA cord into the LG-2MSJ LineGrabber™ phone receptacle.

Step 5:

Mount phone, making sure locking lever on phone is unlocked. (if locking lever is used). Position phone's plug and keyhole mounting slots over the LG-WPA adapter mounting pegs. Press phone in and pull down. Place handset back on cradle.

Tips: for using the LGA-2L with the LG-WPA adapter.

To connect your ALARM CONTROL PANEL to the same wall plate, plug the panel line cord into the LGA-2L adapter **connected to the wall plate only.** (this connects the panel directly to the network ahead of the LineGrabber™)

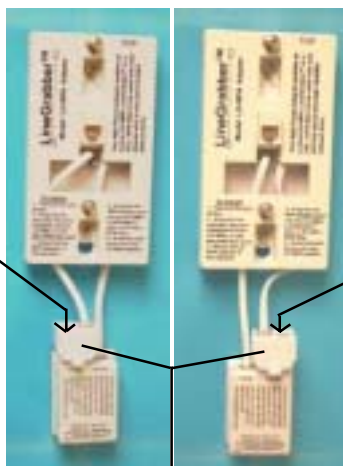

LGA-2L adapter

To share the LG-2MSJ LineGrabber™ with other phone devices, (answering, fax machine, computer with dial up modem etc.) **plug phone devices into the LGA-2L adapter connected to LG-WPA housing line cord only.** (this connects the phone devices to the phone line through the LineGrabber™).

& A*N*D LLC
Alarm Network Devices LLC

1902 Midway Lane, Suite 114, Bellingham, WA 98226 Phone: 360-715-3755, Fax: 360-715-2802
E-mail: andllc@qwestoffice.net website: www.andllc.com