

Sound and Audio Combination Shielded and Unshielded

Description:

- Sound and audio special cable
- ASTM tinned copper
- PVC insulation
- Short overall twist lengths
- One pair shielded 100% coverage of aluminum polyester foil with 22 AWG strd. TC drain wire
- One unshielded Pair
- Overall 75° C PVC jacket
- Standard spool size 1000 feet

Rating as per NEC:

- UL or C(UL)⁺ listed NEC Type CMR
- Constructed in accordance with UL Standard 444
- Listed as being resistant to the spread of fire as defined in section 800–51 (c) of the National Electric Code; UL 1666 Vertical Tray Flame Test.
- Temperature range: –20° C to 75° C dry locations
- Meets 300 volt requirement as specified in section 800–51 of the NEC

Applications:

Indoor (non–conduit per NEC) for:

- Intercom Systems
- Security Systems
- Sound and Audio
- Background Music
- Power–Limited Control Circuits

Color Code:

Shielded Pair:

- 1. Black, 2. Red


Unshielded Pair:

- 1. White, 2. Green

Jacket: Gray

Special Notes:

⁺C(UL) CMR Canadian UL accepted mark replaces PCC–FT4

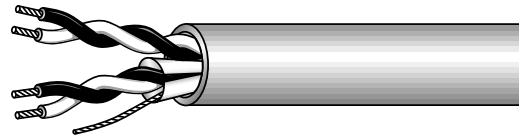

Mechanical Characteristics	
Number of Pairs	2 (1 shld, 1 unshld)
AWG Size	22
Stranding	Solid
Nom. Insulation Thickness	.010 (.25 mm)
Shield Type % Coverage	100% Aluminum Polyester Tape
Nom. Jacket Thickness	.015 (.38 mm)
Nom. O.D.	.156 (3.69 mm)
Drain Wire Size	22 (7 x 30)

Electrical Characteristics Nominal	
Capacitance @ 1 KHZ	54 pf/ft*
	180 pf/M*
	97 pf/ft**
	318 pf/M**
Conductor DCR (Resistance) @ 20° C	17.5 Ω per 1000 ft.

*Nominal Capacitance between conductors.
 **Nominal Capacitance between one conductor and the other connected to the shield.

This document is the property of WEST PENN WIRE/CDT. The information contained herein is considered proprietary and not to be reproduced by any means without written consent of WEST PENN WIRE/CDT.