



Aquaseal Power-Limited Cable Multiple Conductor Shielded

Description:

- ASTM bare copper
- PVC insulation with nylon
- Twisted pair construction (six twists per foot)
- Overall shield 100% coverage of aluminum polyester foil with strd. TC drain wire
- Waterblocked construction
- Overall 105° C sunlight and moisture resistant PVC jacket



Rating:

- UL Listed NEC Type FPL or PLTC
- UL listed for direct burial
- Constructed in accordance with UL Standard 1424 and 13
- Complies with UL 1581 Vertical Tray Flame Test
- Temperature Range: -25° C to 105° C dry locations, 75° C wet locations
- Meets 300 volt requirement as specified in Section 725-51 (e) and 760-51 (c) of the NEC

Applications:

Multiple NEC markings and materials suitable for outdoor use, indoor trays, and non-conduit per NEC allows a variety of uses for:

- Low Voltage Industrial Process Control Circuits
- Power-Limited Circuits
- Power-Limited Fire Alarm Cables
- Power-Limited Tray Cable PLTC

Color Code:

- 1. Black, 2. Red
- JACKET:** Black


SPECIAL NOTES:

- Orange ripcord under jacket

Electrical Characteristics Nominal	
Capacitance @ 1 KHZ	37 pf/ft*
	121 pf/M*
	67 pf/ft**
	220 pf/M**
Conductor DCR (Resistance) @ 20° C	4.2 Ω per 1000 ft.

*Capacitance between conductors.
**Capacitance between one conductor and the others connected to the shield.

Mechanical Characteristics	
Number of Pairs	1
AWG Size	16
Stranding	(7 x 24)
Nom. Insulation Thickness	.015 PVC .38 mm (.005 Nylon) .13 mm
Nom. Jacket Thickness	.040 (1.02 mm)
Nom. O.D.	.328 (8.33 mm)
Drain Wire Size	18 (7x26)

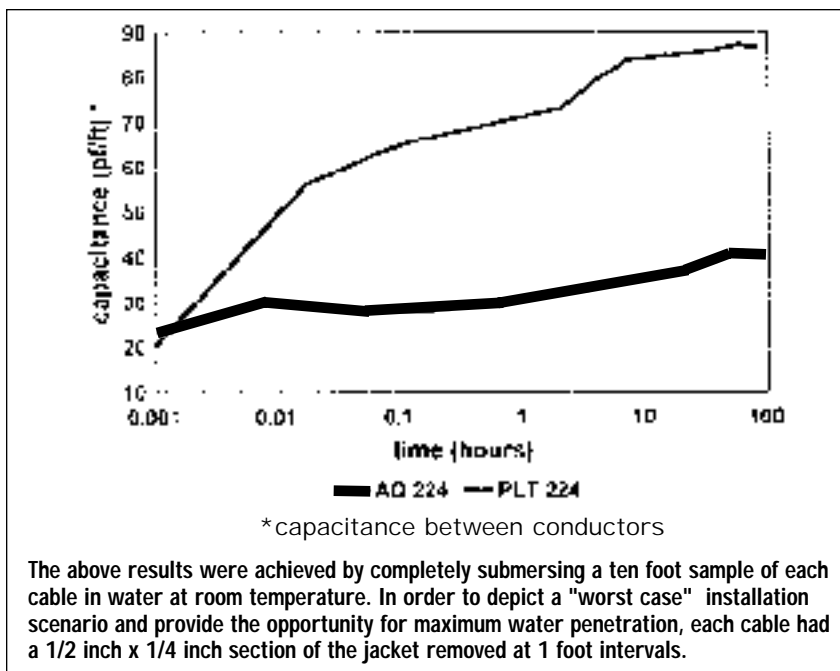

This document is the property of WEST PENN WIRE/CDT. The information contained herein is considered proprietary and not to be reproduced by any means without written consent of WEST PENN WIRE/CDT.