

ClassACT Powered Monitor

Portable Speaker Monitor Specifications

Advancing Technology

The ClassACT (CA-130U1) is a light-weight, easy to use sound system that fills the classroom with your voice using a wireless microphone. With a hands free microphone you can make a presentation, write on a whiteboard or operate your projector without interrupting your presentation. Teachers, corporate presenters and training instructors can all use a ClassACT.



CLASSACT MODELS

- CA-130U1** 1 built-in wireless receiver
- CLASSACT** CA-130U1, wireless remote control & 1 handheld or handsfree wireless microphone

6-YEAR WARRANTY!

- REACH CROWDS OF 100+
- 101 DB OF CLEAR SOUND FROM 30 WATT AMPLIFIER
- ANCHOR WIRELESS RECEIVER & MICROPHONE W/ 16 USER-SELECTABLE CHANNELS
- EVEN SOUND DISTRIBUTION INSURES EVERYONE IN ATTENDANCE CAN HEAR YOU
- MAGNETICALLY SHIELDED SPEAKER FOR AV USE
- "DAISY-CHAIN" SECOND SPEAKER FOR LARGER ROOMS
- REMOTE CONTROL FOR VOLUME & MUTE
- CONTROLLED WIRELESS ANTENNA RANGE KEEPS THE AUDIO IN THE ROOM
- UNIT CAN BE MOUNTED ON A WALL, CEILING OR SPEAKER STAND
- DURABLE INJECTION-MOLDED POLYPROPYLENE CASE
- LIGHTWEIGHT WEIGHS JUST 8.5 POUNDS


SAVE YOUR VOICE • QUIT YELLING • EVERYONE HEARS YOU W/ A CLASSACT SOUND SYSTEM

FILL ANY 30' X 30' ROOM WITH SOUND!

MADE IN THE USA!

CLASSACT ACCESSORIES

- REMOTE-130** Infrared remote control
- MIC-90P** Professional dynamic, cardioid pattern handheld microphone
- CC-100** Speaker/accessory bag
- CC-100XL** Speaker/accessory bag - large
- HC-1550** Custom traveling hard case
- SS-250** Speaker stand
- MSB-201** Mic stand w/ boom
- SB-1** Stand mount
- SB-3** Ceiling mount bracket
- SB-360** 360° swivel wall bracket

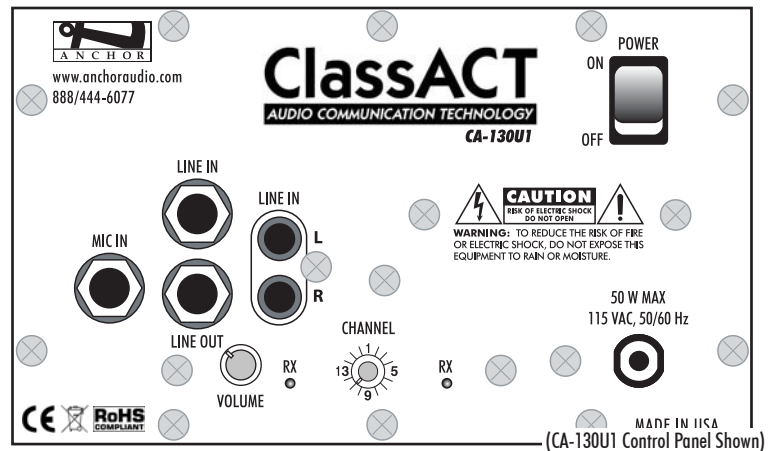

CLASSACT TECHNICAL SPECIFICATIONS

Rated Power Output	30 watts	Inputs	
Max SPL @ Rated Power	101 dB @ 1 meter	Line (2)	Hi-Z, unbalanced, RCA (summing L + R)
Wireless Antenna Range	30 feet / 9.14 meter	Microphone	Lo-Z, unbalanced, 1/4" phone
Frequency Response	65 Hz – 18 kHz ± 3 dB	Output	
Speaker Type	4.5" woofer, 10 mm dome tweeter	Line	Lo-Z, buffered, 1/4" phone
AC Power Req.	110 – 125 VAC, 50/60 Hz	Sensitivity For Rated Output	
Export Model	208 – 240 VAC, 50/60 Hz (50W max)	Line	-20 dBV (100 mVrms)
Fuse Rating	T 1.0A / 250V	Microphone	-43 dBV (7.5 mVrms)
Export Model	T 0.5A / 250V (internally mounted)		
Dimensions (HWD)	5.25 x 8.4 x 9" / 13 x 21 x 23 cm		
Weight	8.5 lbs / 3.8 Kg		



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)

UHF WIRELESS

- WH-6000** Wireless Handheld mic/transmitter
- WB-6000** Wireless body-pack transmitter w/ handsfree microphone. Mic options include: Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBM-60



Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

888/444-6077

www.anchoraudio.com