

**DSR-3506****6-Channel DVRs  
with Built-in  
Multiplexer****Features:**

- ▶ An HDD Recorder with a Complete 6-Channel Multiplexer
- ▶ A Clear Picture with Horizontal Resolution of 520 TV Lines
- ▶ Simultaneous Recording and Playback at 60 FPS
- ▶ Live Picture Monitoring at 30 FPS

**DSR-3506**

- Built-in 6-channel Multiplexer
- Select HDD Capacity Depending on Need
  - 80GB (DSR-3506H80) or 160GB (DSR-3506H160) for economy
  - 300GB (DSR-3506H300) or 600GB (DSR-3506H600) for versatility
- Audio Recording Available
- Horizontal Resolution of 520 TV Lines
- Remote Control by a PC
- CF Type II Expansion Slot
- Live Picture Monitoring at 30 FPS
- Simultaneous Recording and Playback (up to 60 FPS)
- Quick Retrieval of Recorded Video
- Warning Functions
- Alarm Recording
- Pre-alarm Recording
- Timer Recording
- Programmed Recording
- Motion Sensor for Catching All Activities
- Easy Recording with Minimal Setup
- Easy Setting of Time Periods

System Consists of:

1 each Sanyo Retail DVR-3506 with 160GB Hard Drive

4 each Sanyo High Res Vandal Proof Dome

1 each NAV UL listed 8 position power Supply

1 each NAV 17" LCD Monitor

1 each 1000 foot roll of cat 5E cable

1 each 1000 foot roll of 2 conductor power wire

8 each Video Baluns

**ALL ITEMS HAVE A 3 YEAR WARRANTY ( Leasing Only )**

**VDC-D1184VA****VDC-D1184VA**

- 1/4" Color CCD Image Sensor
- High Quality Images with DSP
- Industry Leading 520 TV Lines
- IR Cut Filter Removal Day/Night
- Two Types of Backlight Compe

- Photometry)
- High Performance with Minimum 0.04 Lux (B/W Mode), 1.2 Lux
  - Built-in 2.8 - 5.8 mm Varifocal / 8.0 mm in 1/3" CCD)
  - Die Cast Aluminum Chassis with
  - Surface Mount and In-Ceiling c
  - IP66 Weatherproofing Standard
  - 24V AC and 12V DC, Dual Power
  - 3-year Warranty




**North American Video 8-Output UL Listed Power Supply**

FEATURES:

<p>Listed (UL 2044)</p> <p>Input 115VAC 50/60 HZ 0.9 Amps</p> <p>4 Amps 100VA supply current</p> <p>Eight 24VAC individually fused outputs</p> <p>Spare fuses included</p> <p>Unit maintains camera synchronization</p>	<p>Output fuses are rated at 3 Amps</p> <p>Main fuse is rated at 5 Amps</p> <p>Surge protected outputs Individual LED's for each output</p> <p>Power ON/OFF switch</p> <p>AC power LED indicator</p>

**CABLE & VIDEO BALUNS**

- |  |   |
|--|---|
|  | <ul style="list-style-type: none"> <li>• <b>CAT 5E NETWORK CABLE 1000'</b></li> </ul> |
|--|---|

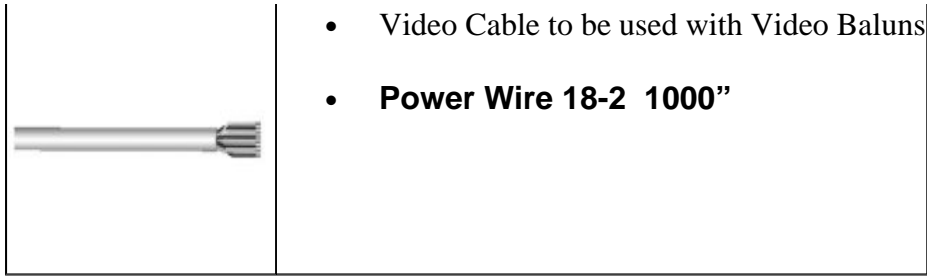

### VideoBalun Unlimited BL3725, 2000' + Transmitter for DVR

- Connects to Unshielded Twisted Pair Wire in Seconds
- Wire Connections can be Made After the BL3725 is Attached to CCTV Devices Such as DVR's and Multiplexers
- Extremely Compact Size Allows the EZ-VU BL3725 to Fit Where Other Baluns Will Not
- Transmits Video 2000 Feet or More\*
- UL Listed for the U.S. and Canada
- Cabling Cost Savings up to 50%

The EZ-VU BL3725 allows the replacement of coaxial cable with ordinary unshielded twisted pair (UTP) cable. This allows CCTV equipment to be installed using less expensive UTP cable.

The EZ-VU BL3725 can be connected to unshielded twisted pair (UTP) wire in seconds. Since the UTP wire connection is made at the back of the unit, this allows the connection to be made after the BL3725 is attached to the CCTV equipment. This is ideal for installations involving devices such as DVR's and multiplexers where confined spaces can slow down installations. The EZ-VU BL3725 is suitable for any application in which baseband video is transmitted in NTSC, PAL or Secam formats such as CCTV cameras, monitors, multiplexers, switchers and DVR's.

Applications exist in the following areas:

- Commercial and Industrial Security
- Government, Military and Law Enforcement Applications
- Intelligent Transportation Systems (ITS)
- Casino Security and Surveillance Systems
- Airport Security Systems
- **Retail Stores**



**NAV 17" High Resolution LCD**

### **Video Special Features**

Screen Size 17" 2D comb Filter Yes  
 Resolution 1280 x 1024@75Hz Deinterlace Function Yes  
 Contrast Ratio 700:1 USB Hub Not Available  
 Brightness 300cd/m2 DC 12V Power Outlet Yes  
 Aspect Ratio 4:3 LCD Protection Glass Yes  
 Color Depth 16.2M Rack Mountable Kit Optional  
 Viewing Angle(H/V) 150°/135° Camera Mounting Hole 2(Upper/Bottom)  
 Pixel Pitch 0.264mm Multi-lingual Menus English, Spanish, French,  
 Response Time 8ms German, Italian  
 Scanning Frequency(Horizontal) 56.7 ~ 82KHz VESA™ Standard Compatible Yes  
 (Vertical) 55 ~ 77Hz  
 Video System NTSC

### **Cabinet Dimensions**

W x H x D 15.2"x15.7"x2.5"/386x398x65mm  
 Built-in Speakers Yes  
 Weight 13.7lbs/6.2kg  
 Gradual Volume Increase Yes Dimensions with Packaging  
 W x H x D 18.5"x16.9"x7.5"/470x430x191m  
 Weight 17.2lbs/7.8kg  
 RGB In (15-pin) 1 Power Consumption <40W  
 Video In(BNC Jack) 2 Power Source AC110~230V(50/60Hz)  
 Video Out(BNC Jack) 2  
 Audio In 2  
 Audio Out 2 Finish Black  
 S-Video In 1 Tilt Stand Yes  
 S-Video Out 1  
 Component In Not Available  
 DVI IN

### **Warranty**

1 Warranty: Parts/Labor 3 Year/3 Year

### **Remote Control Regulations**

Transmitter Yes

\* Specification and Design are subject to change without prior notice.

TUV-NRTL(same as UL), CB, FCC(B), CE-EMC(LVD)

