

## Titan™ Single Brewer



### Features

#### Titan Single Brewer

**High-volume brewing solution that features simple operation, precise extraction control and portable servers**

- Brews up to 22.5 gallons (85.2 litres) of perfect coffee per hour.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- BrewMETER® allows automatic programming of pulse routine.
- SplashGard® funnel and funnel lock help improve safety.
- Funnel has 28 ounce (.8 kg) ground coffee capacity and paper filter retainers to eliminate fold-over.
- Titan TF servers are insulated to keep coffee hot for hours.
- Hot water faucet.
- Energy-saver mode reduces tank temperature during idle periods.

#### Model Titan Single Brewer with 3 gallon TF Server

*(servers sold separately)*

Dimensions: 40.02" H x 21.3" W x 21.74" D  
(101.7cm H x 54.1cm W x 55.2cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

**Easy Clear® EQHP-54**  
Product No. : 39000.0006



**Easy Clear® EQHP-54L**  
Product No. : 39000.0003

**Titan TF Server**  
Product No.: 39400.0001  
3 gallon



**Titan/Urn Filter Pack**  
Product No. : 20111.0000  
Packed per case: 250  
Dimensions:  
20" Base x 8" Sidewall  
50.8 cm Base x 20.3 cm Sidewall



**Titan Funnel**  
Product No.: 40114.0000



#### Model

Titan Single

#### Agency Listing



## Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Funnel Locks	Cord Attached
Titan Single	39300.0000	120/208 (3-phase)	33.4	12000	22.5 gal/hr	17.4	107 lbs.	Yes	No
		*120/208 (single-phase)	40.1	8200	17 gal/hr				


**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise).

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

\*Brewer can easily be rewired in the field for single-phase operation.

Electrical: Brewer is 4-wires plus ground service rated 120/208V, 3-phase, 50/60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male flare fitting. Requires 4 gpm minimum water flow.

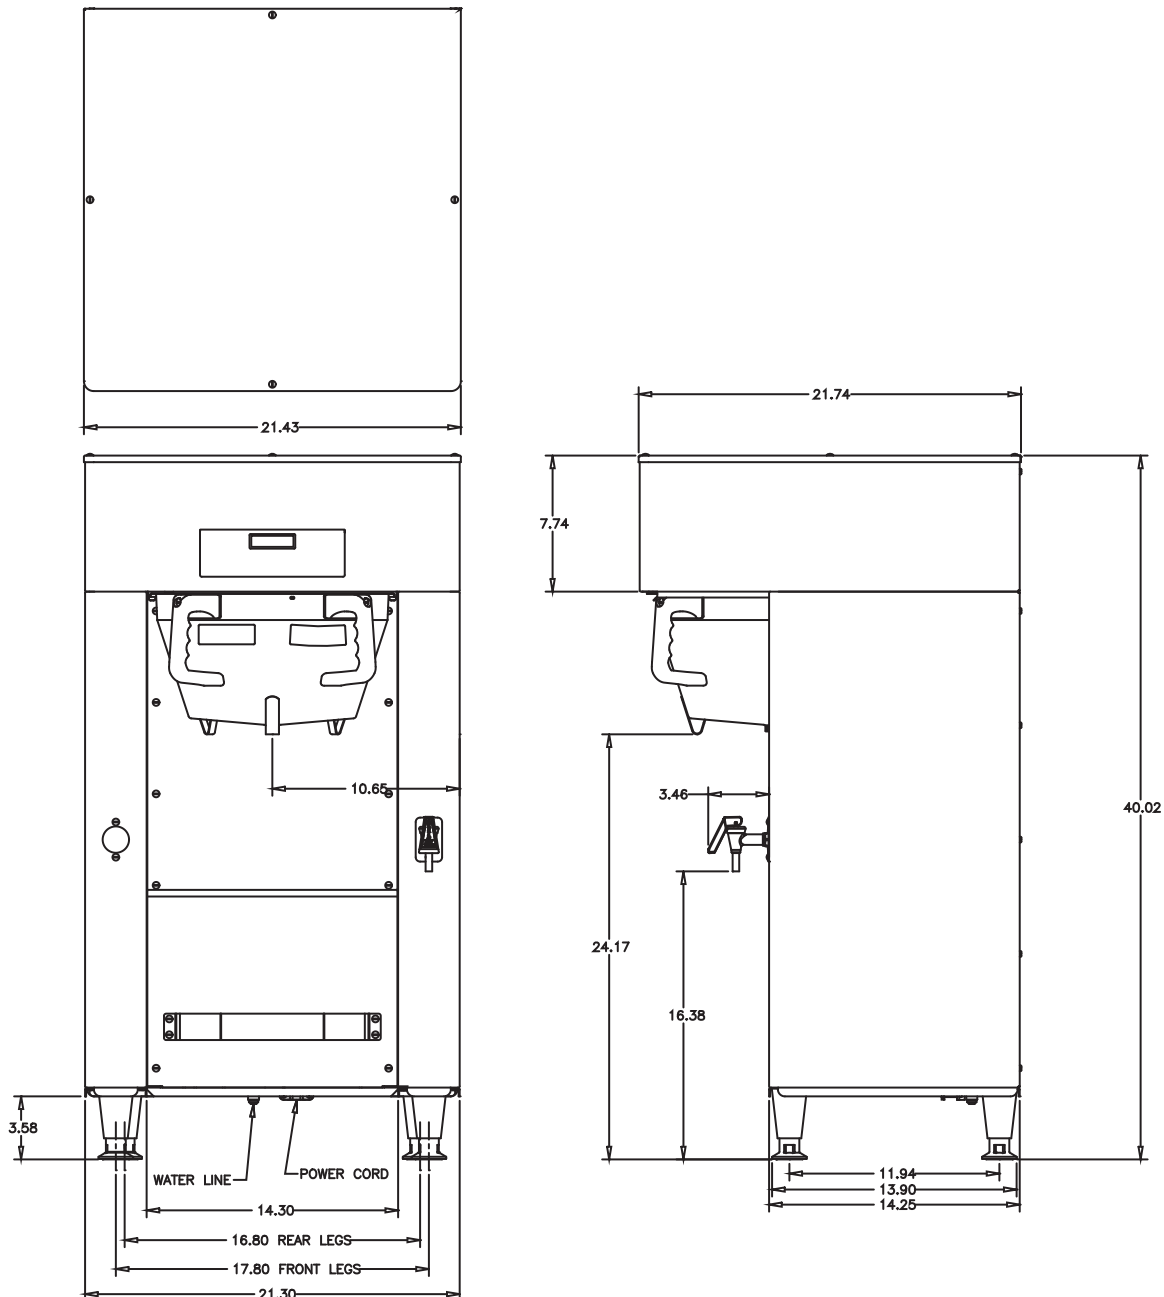

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

12/08 © Bunn-O-Matic Corporation