

## AXIOM™ 1 Gallon Coffee Brewer with Portable Server

ITEM#

PROJECT

DATE



**Model Single AXIOM with 1.5 GPR**

Dimensions: 26.1"H x 8.5"W x 18.9"D  
(66.3cm H x 21.6cm W x 48cm D)

### Features

#### AXIOM One Gallon Coffee Brewer

- Brews 4.5 to 9.0 gallons (17.0 to 34.1 litres) of perfect coffee per hour.
- 1/2 gallon and 1 gallon (1.9 and 3.8 litre) batches brewed into 1.5 GPR portable server (included).
- Large 200oz. (5.9 litre) tank.
- Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD® technology simplifies brewer programming with an LCD. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Gourmet funnel allows use of heavier throw weights of coffee.
- Coffee extraction controlled with pre-infusion, pulse brew and digital temperature control.
- Cold brew lock-out and automatic warmer time-out ensure high quality, fresh tasting coffee.
- Front of machine programming simplifies installation.
- Electronic diagnostics and built-in tank drain make service easier.
- SplashGard® funnel deflects hot liquids away from the hand.
- Hot water faucet on all models.

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

**Easy Clear® EQHP-10**  
Product No. : 39000.0004



**Easy Clear® EQHP-10CRTG**  
Product No. : 39000.1004

**Single/Dual Filter Pack**  
Product No. : 20100.0000

Packed per case: 500

Dimensions: 5 1/4" Base x 3 3/4" Sidewall  
13.3 cm Base x 9.5 cm Sidewall



**1.5 GPR SS Portable Server on an RWS1 Warmer**  
1GPR Product No. : 20950.0004  
RWS1 Product No. : 12203.0010

*\*Also available with side handles or black decor.*



#### Model

Single AXIOM 15  
Single AXIOM 35

#### Agency Listing



## Dimensions & Specifications

| Model           | Product #  | Volts       | Amps  | Total Watts | Brewing Capacity | Cubic Measure       | Shipping Weight | Cord Attached |
|-----------------|------------|-------------|-------|-------------|------------------|---------------------|-----------------|---------------|
| SINGLE AXIOM15  | 38700.0043 | 120         | 13.3  | 1600        | 4.5 gal/hr       | 6.0 ft <sup>3</sup> | 30 lb.          | Yes           |
| SINGLE AXIOM 35 | 38700.0045 | 120/208-240 | 15.8* | 3650        | 7.5/9.0 gal/hr   | 5.6 ft <sup>3</sup> | 30 lb.          | No            |

\*Current at 120/240 Volts


**Brewing capacity:** based upon incoming water temp of 60°F/15°C (140°F/60°C rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 120 volt model requires 2-wires plus ground service rated 120V, single phase.

240 volt model requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

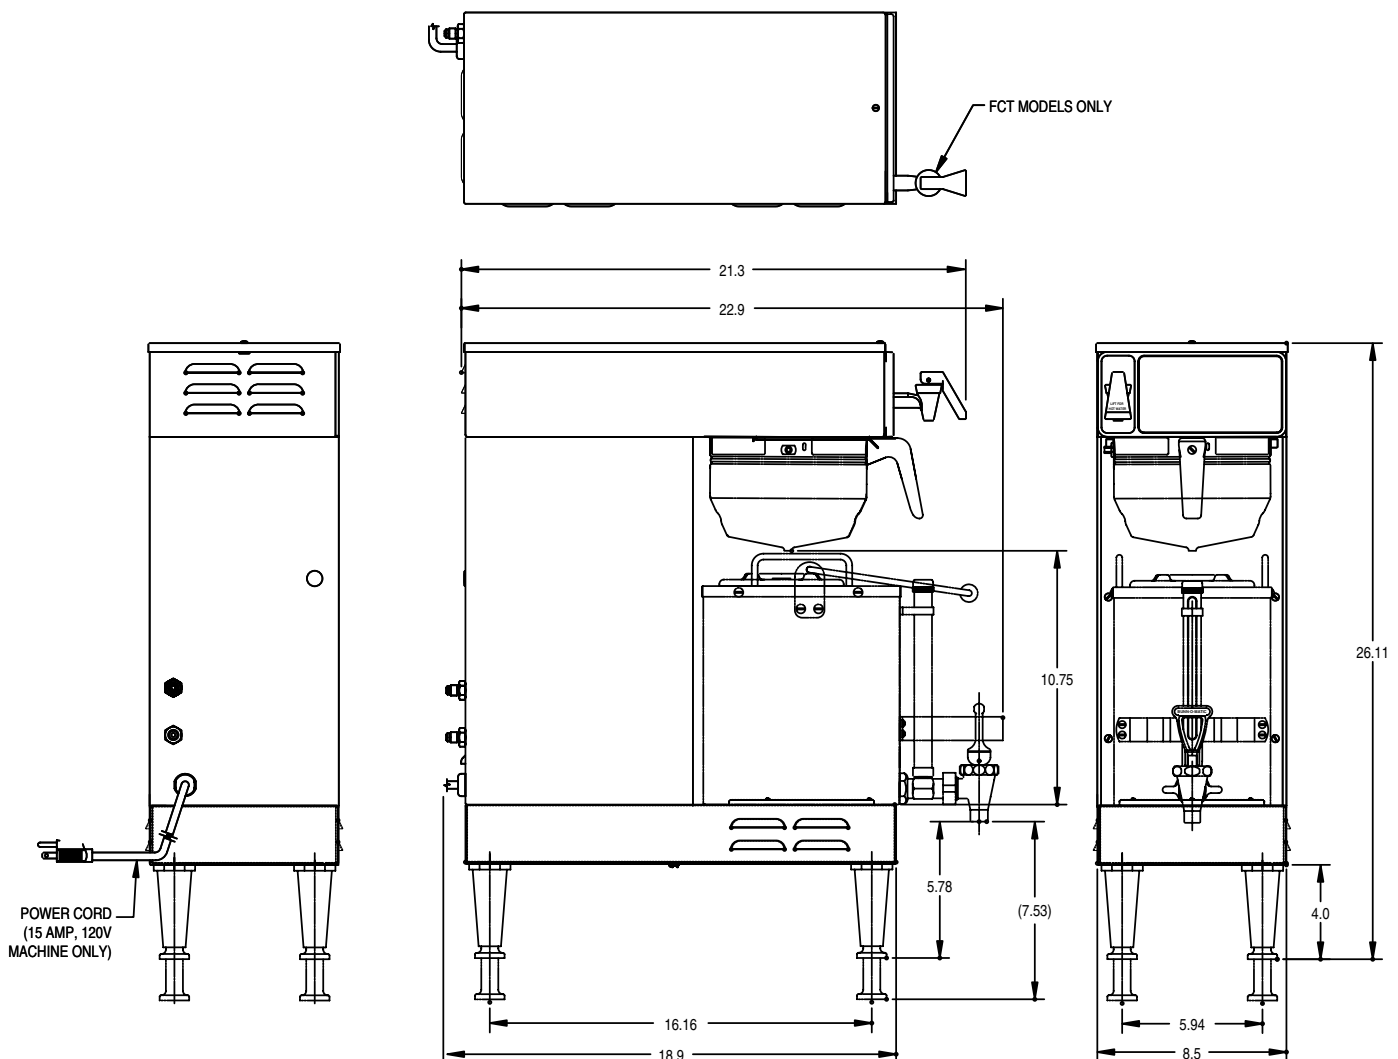

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

8/09 © Bunn-O-Matic Corporation