

# UNI-SERVE


## Replacement Transformer Series

# SENTRY®

**UL2161  
LISTED**



- ◆ 15,000V unit replaces 15,000V / 12,000V / 10,500V / ratings
- ◆ 9,000V unit replaces 9,000V / 7,500V / 6,000V / 5,000V / 4,000V / 3,000V ratings
- ◆ Available in Conventional or Enclosed
- ◆ Poly-Resin Fill
- ◆ 120V and 277V, 60Hz
- ◆ Normal Power Factor
- ◆ Ground Fault Protection
- ◆ Mid-point Ground Design
- ◆ Service Button, LED Diagnosis, Auto-reset
- ◆ Dimmable and Flashable

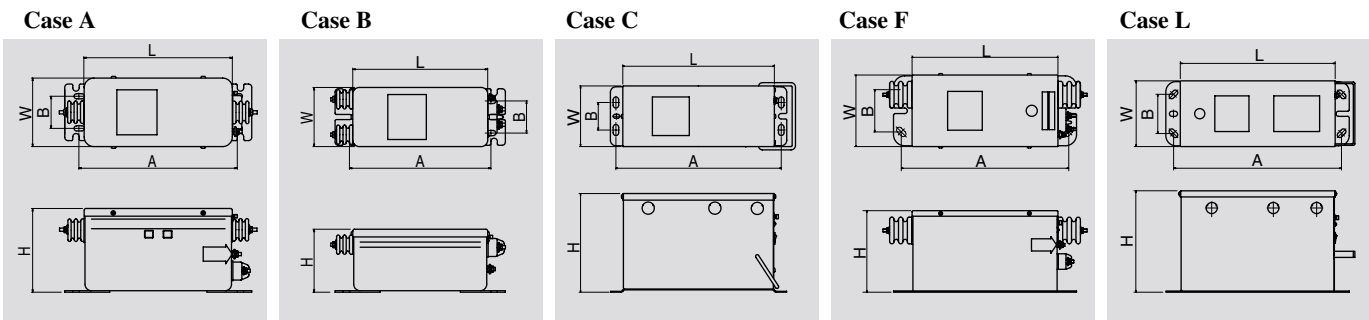

	Catalog Number	Secondary		Primary V.A.	Input Amps	Dimensions in Inches					Wt. lbs.	Case	
		Volts	mA			L	W	H	A	B			
CONVENTIONAL	30mA	4B15N3-CB-S	15,000	30	450	3.8	9-1/16	4-3/16	5-3/16	9-11/16	2	22	A
		4B09N3-CB-S	9,000	30	270	2.3	8-1/4	3-5/8	3-7/8	8-3/4	2	13	B
		7B15N3-CB-S	15,000	30	450	1.6	9-1/16	4-3/16	5-3/16	9-11/16	2	22	A
		7B09N3-CB-S	9,000	30	270	1.0	8-1/4	3-5/8	3-7/8	8-3/4	2	13	B
	60mA	4B15N6-CB-S	15,000	60	900	7.50	10-3/8	5-1/16	5-13/16	11-7/8	3	36	F
		4B09N6-CB-S	9,000	60	540	4.50	10-3/8	5-1/16	5	11-7/8	3	32	F
		7B15N6-CB-S	15,000	60	900	3.25	10-3/8	5-1/16	5-13/16	11-7/8	3	36	F
		7B09N6-CB-S	9,000	60	540	1.95	10-3/8	5-1/16	5	11-7/8	3	32	F
ENCLOSED	30mA	4B15N3-EB-S	15,000	30	450	3.8	10-7/8	4-11/32	7-1/16	11-3/4	2	26	C
		4B09N3-EB-S	9,000	30	270	2.3	10-7/8	3-5/8	6-5/16	11-3/4	2	18	C
		7B15N3-EB-S	15,000	30	450	1.6	10-7/8	4-11/32	7-1/16	11-3/4	2	26	C
		7B09N3-EB-S	9,000	30	270	1.0	10-7/8	3-5/8	6-5/16	11-3/4	2	18	C
	60mA	4B15N6-EB-S	15,000	60	900	7.50	11-13/32	5-5/64	7-27/32	13.0	3.0	39	L
		4B09N6-EB-S	9,000	60	540	4.50	11-13/32	5-5/64	7-3/64	13.0	3.0	32	L
		7B15N6-EB-S	15,000	60	900	3.25	11-13/32	5-5/64	7-27/32	13.0	3.0	39	L
		7B09N6-EB-S	9,000	60	540	1.95	11-13/32	5-5/64	7-3/64	13.0	3.0	32	L

Highlighted transformers are equipped with Secondary Ground Fault Protection.