


# Secure your next adventure...

Cable locks for your kayak.

## Don't let your boat get away - Lasso it today!

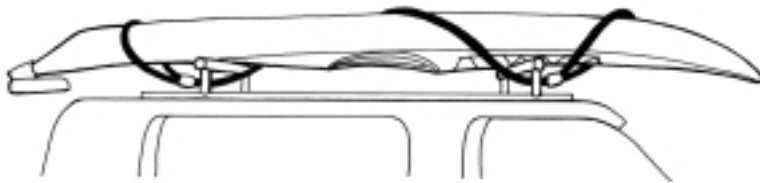


### Installation is simple ...

1. Secure boat on any standard rooftop rack according to manufacturer's directions. Be sure that your roof racks are locked to the vehicle. Loop Lasso ends around bow and stern of boat, with cable running under the rack.
  2. Wrap Lasso around rack to tighten. Pull the large loop as far down the boat as possible before taking up the slack around the bars of your roof rack. Then secure the cable lock. (Note: The Lasso's keys will not come out of the keyed lock until the two cable ends are locked together.)
- ◆ Lasso Security Cables work with many touring kayaks to help keep the hatch covers secure as well.
  - ◆ You can use your Lasso to secure your kayak to any stationary object.


### For Keyed Lock Only:

- ◆ The key cannot be removed from the lock until the Lasso cable has been secured together.
- ◆ Use care when pulling the cables tight together. The protective plastic cap covering the male end of the keyed cable lock may occasionally migrate forward if pulled on with excessive force. This may impede the full insertion of the locking pin. If this happens, just slide the plastic cap slightly down the cable, away from the locking end, and it will work.

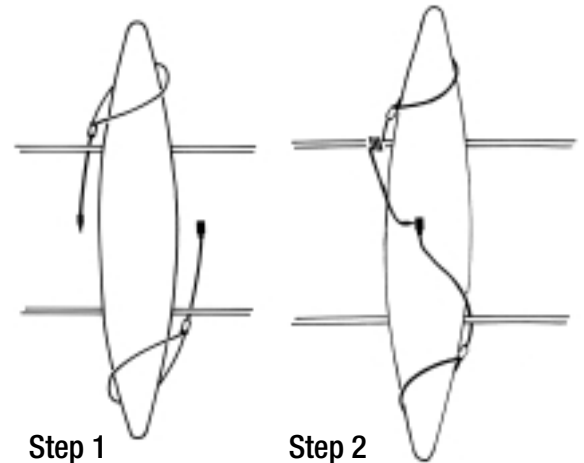

### To change default combination: (For combination lock only)

1. Turn combination to default setting (0000) and disengage cable lock.
2. Grasp barrel mechanism firmly and turn 90° clockwise while holding number tumblers in place. (See Fig. 1)
3. Adjust number tumblers to set desired combination. (Write down your combination and store it in a secure place.)
4. Hold number tumblers in place and turn barrel mechanism 90° counter-clockwise. (See Fig. 2)

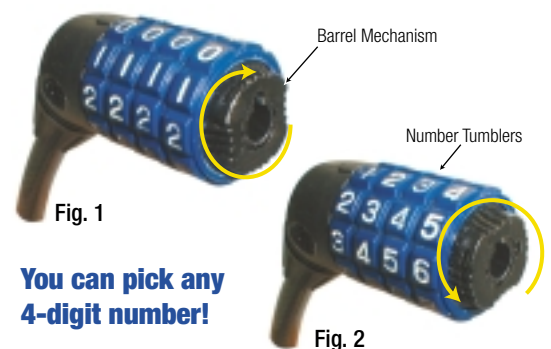

## Lasso Security Cables - ask for them by name.