




## Quick Release Instructions

**To Load a Bicycle:** Open the handle of the quick release so the black handle is straight (see below). Load the fork onto the quick release so both fork ends are resting straight on the quick release. Close the handle by flipping it 90 degrees to the closed position. If it is too loose, open the handle and turn it like a screwdriver (clockwise to tighten, counter clockwise to loosen), and close the handle again. You may either turn the handle with or without holding the fixed end of quick release. **Readjust until a firm and positive snap is felt when closed.**

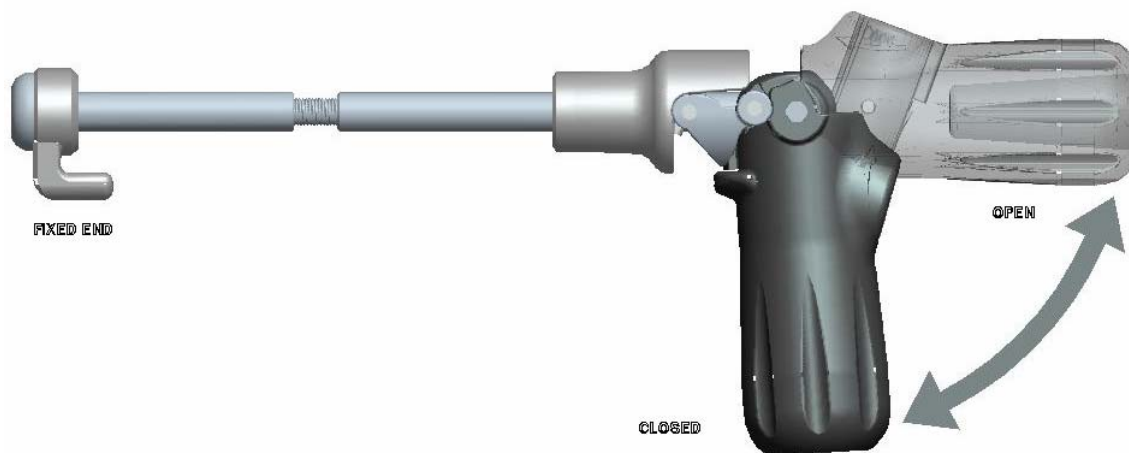

**The Quick Release Skewer is not an on/off switch. You must close the handle with enough tension to hold the bike!** Rock the bike side to side to ensure proper mounting. The fork should be properly seated and not move! If at all unsure, please consult your dealer or RockyMounts. Failure to comply can result in a bike detaching resulting in damage to the bicycle, vehicle, or other motorist.

**If your fork has carbon fiber dropouts or does not have “safety” tabs,** you must be careful and close the skewer **VERY TIGHTLY**. Carbon fiber dropouts do not have flat machined surfaces and can be difficult to secure in a fork mount. It is imperative you perform the above safety test **EVERYTIME** you load the bike.

**Locking Note:** The quick release handle can be turned (unscrewed) even when locked. To prevent a thief from doing this, the handle of the quick release must hit the crossbar when rotated. To test, try turning the handle counter-clockwise when closed. If it does not hit the bar, loosen the bolts and reposition the bike mount further inboard on the rack until the handle hits the crossbar when closed.

### One Year Limited Warranty

Rocky Mounts Inc. Warrants to the original purchaser that the product will be free from defects in material and/or workmanship for one (1) year from the date of original retail purchase. Subject to the limitations stated below, Rocky Mounts will at its own expense during the one year warranty period repair or replace the defective component(s). The purchaser will be responsible for freight charges to Rocky Mounts. This warranty is only applicable if the instructions are correctly followed and the components are properly used. This warranty is not applicable if the defect is caused by normal wear and tear or exposure, the component(s) is damaged from misuse, abuse, theft, fire, accident, alteration, mixing third party components with the system and/or unlawful operation of the vehicle. Rocky Mounts Inc. cannot and does not assume responsibility for any damages to any property arising out of the improper attachment to a vehicle or a bicycle to the system or use of its products. This limited warranty applies to Rocky Mounts products and not to the products used in conjunction with Rocky Mounts products. This warranty is in lieu of all other warranties, expressed or implied, and does not cover consequential damages of any kind arising from the use or misuse of Rocky Mounts products. ROCKY MOUNTS DOES NOT AUTHORIZE ANY PERSON TO ASSUME, ON ITS BEHALF, ANY OTHER OBLIGATION OR LIABILITY.