


# "BASIC" INSTALLATION INSTRUCTIONS

## Tools and supplies required for installation of your HAND ROLL-UP Fresh Air Screen®:

- Hammer and step ladder
- One roll of self adhesive hook and loop material (included) to provide for two strips that would be the same size for the two door jambs and a longer strip that is needed for the header
- 5/8 inch roofing nails (not included) Roofing nails could be used to nail through the straps and secure straps at the top of the screen, to garage door header, to ensure long term attachment.
- 3/4" plastic conduit (not included)

**Step 1** - Install and align the self adhesive hook and loop strips on both door jambs, about 1 inch in front (**street side**) of the door stops/weather strips. Then add the hook and loop strip to the header, so that it allows a smooth surface edge with both door jamb strips.

**Step 2** - Starting at either upper corner, attach the Fresh Air Screen® to the hook and loop strip which is mounted on the header. Then attach the Fresh Air Screen® to the hook and loop strips that are mounted on either of the door jambs of the garage door opening.

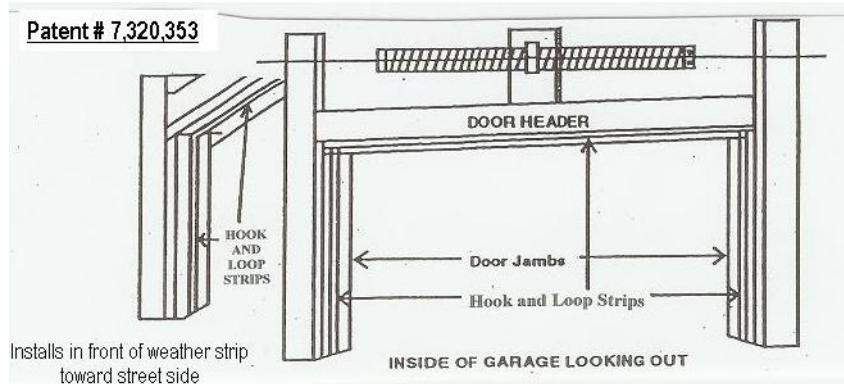

**Step 3** - After fastening the screen to the header and door jambs, if desired apply roofing nails through the straps at the top of the screen, to the header. The roofing nails help to create a permanent bond, not absolutely necessary to use, but does help make this a long term, permanent bond.

**Step 4 - Straightening and weighing down the screen bottom** - The door is shipped with a pouch sewn into the bottom of the screen. This pouch will allow for the addition of a straightening and weighing device. It is recommended that you use a 3/4 inch plastic electrical conduit which may be purchased at your local retailer and cut the conduit to be 1 foot shorter **than the width** of the screen. The conduit helps keep the Fresh Air Screen® against the floor and from flopping or swaying in the breeze and prevents sagging when rolled up.

**Step 5 - Rolling screen up** - To allow automobile entrance (without removing the screen), unzip the two zippers and roll up the screen with the 3/4 inch conduit in place in the pouch (**Step 4**) and fasten screen to top of opening in the straps provided. 5/8 inch roofing nails could be driven through the straps to ensure the weight of the screen will not pull hook and loop material loose at the strap locations.

**Removal** - You can remove and store the Fresh Air Screen® by separating the hook and loop fastening system when the screen is not going to be used for a long period of time or during the winter months.

**Cleaning** - Wash the Fresh Air Screen® with a mild soap and water. Allow to thoroughly dry before storing.

**Warranty** - The Fresh Air Screen® is warranted to be free of manufacturing and material defects for a period of one year from the date of purchase on workmanship and materials. This warranty excludes damage to screen caused by sharp objects, pet or animal damage or vehicle damage.

## ORDERING INSTRUCTIONS

The standard sizes of the Fresh Air Screen® are 8' x 7', 9' x 7', 9' x 8', 16' x 7', and 16' x 8'. To order a custom size of the Fresh Air Screen® for garages, carports, gazebos or porches, we need to know the exact opening width and the exact opening height. You may order a custom size by email or by contacting your local retail store who handles our Fresh Air Screen®.

## CONSUMER WARNING:

The Fresh Air Screen® has been engineered to keep insects, pests and trash out while letting fresh air and sunlight in. It is not designed to be a security wall and will not prevent children, adults or aggressive animals from getting in or out of the garage and therefore, into the home.

For any questions about installation please call 1-888-549-0783

PATENT # 7,320,353

Proudly made in the USA

6/2008