

### PRODUCT OVERVIEW

TASCAM's 202mkIV is a cost-effective, rugged dual-well cassette deck designed to offer reliability, simplicity, and audio quality. Both cassette wells are capable of recording which makes creating



two masters at a time possible. Useful playing features like Intro Check and Blank Scan help the user find the music and keep it playing by avoiding dead tape spots. A front microphone input with level control offers the convenience of a front input. The high speed dub feature gives quick on-offs for rehearsal tapes or high quality reference dubs.

**MSRP \$525.00**

3-U Rack-mountable Dual Cassette Deck

Dual Auto Reverse

12% +/- Pitch Control on Deck #1

Dolby B Noise Reduction

Power of Play and Record

Continuous Recording.

Timer Playback

Intro Check Automatically Scans Each Song

Auto Tape Selection

Blank Scan skips over long blank segments

Normal and High Speed Dubbing Capability

Both Decks Record for Simultaneous Masters

Computomatic Program Search


Synchro Reverse Dubbing (from tape 1 to tape 2)

### ARCHITECT'S SPECIFICATIONS

The TASCAM 202mkIV is a dual cassette deck with the ability to record on one-or-both wells of the deck. The cassette deck includes Dual Auto Reverse, 12% +/- pitch control on Tape Deck 1, and Power on Play and Record. The unit is equipped with a front microphone input and level control, Dolby B noise reduction, and a front headphone output.

The TASCAM 202mkIV offers normal speed and high speed dubbing and advanced tape play and search capabilities; including Blank Scan and Intro Check. Blank Scan searches for the next song if the deck detects 10 seconds of silence in the program material. Intro Check searches for each track and plays the first 15 seconds. The 202mkIV is a 3 rack space unit with the dimensions of 19" x 5.7" x 11.2" (WxHxD)

## PANELS

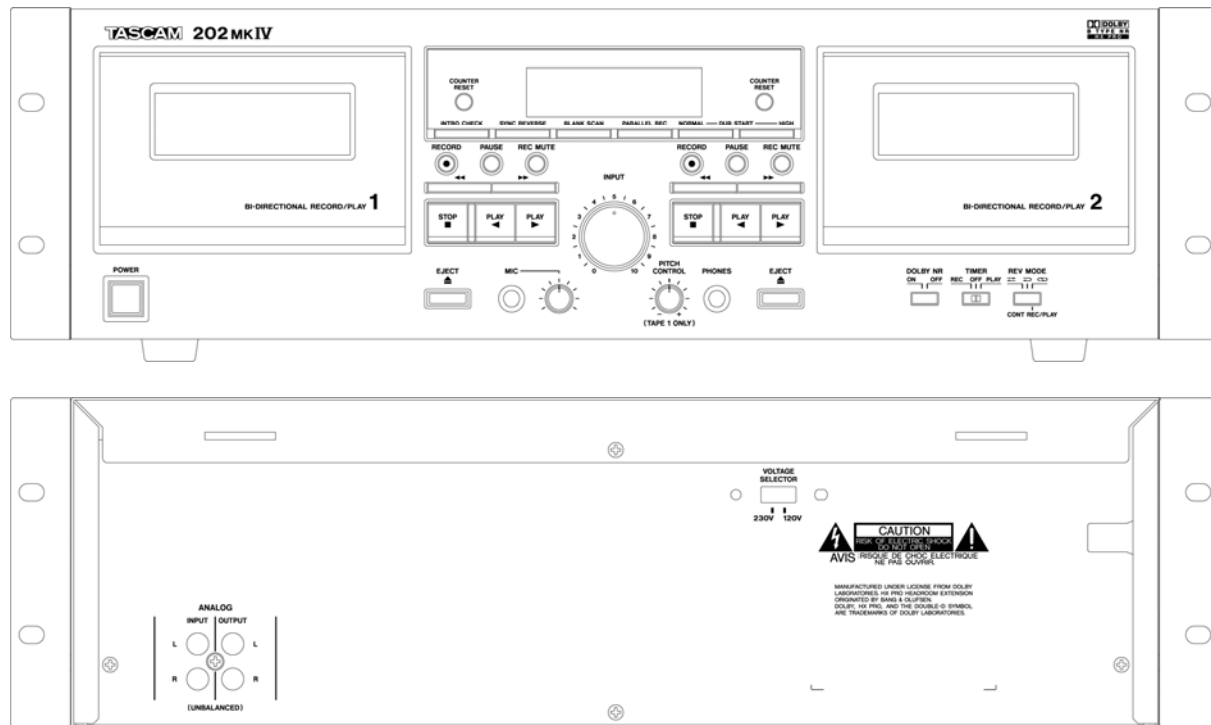

## SPECIFICATIONS

Tape:	Compact cassette tape C-60/90 (Normal and High Position, Metal: playback only)
Track Format:	4-track, 2-channel
Head Configuration:	Record/repro combination rotary head x 1 (TAPE I & TAPE II) Erase head x 1 (TAPE I & TAPE II)
Motor:	DC servo motor x 1 (TAPE I & TAPE II)
Tape Speed:	4.76 cm/sec
Pitch Control:	approx. +/- 12%
Line Input:	RCA Nominal Input Level: -18dBV (0.1V) Input Impedance: 50k ohm
Line Output:	RCA Nominal Output Level: -6.7dBV (0.46V) Output Load Impedance: 50k ohm
Frequency Response:	30 Hz to 18 kHz +/-3dB (High Position) 30 Hz to 17 kHz +/-3dB (Normal)
Signal-to-Noise Ratio:	58 dB (with Dolby off) 69 dB (with Dolby on)
Wow and Flutter:	0.09% (WRMS)
Fast Winding Time :	110 sec. (approx.) with C-60 cassette
Headphone:	1/4" stereo phone jack 1 mW x 2 (32ohm)
Power Requirement:	120 V / 230V, 50-60Hz 230 V 50 Hz
Consumption:	22 W
Dimensions (W x H x D):	483 mm x 127 mm x 292 mm
Weight:	4.1kg