


### Features

- 1/4 inch SONY Super HAD CCD
- High Resolution : 480TV Lines
- 30x Optical Power Zoom (10x Digital Zoom)
- Built-in IR LED (126EA) & Sensor(1EA)
- Day&Night (ICR)
- Electronic sensitivity-up (DSS)
- Auto White Balance
- AGC/BLC/Flickerless (On/Off)
- Min. Illumination : Day(1Lux), Night(0.000Lux, IR LED On)
- Weather-proof Housing
- Built in Fan/Heater



### DIMENSIONS

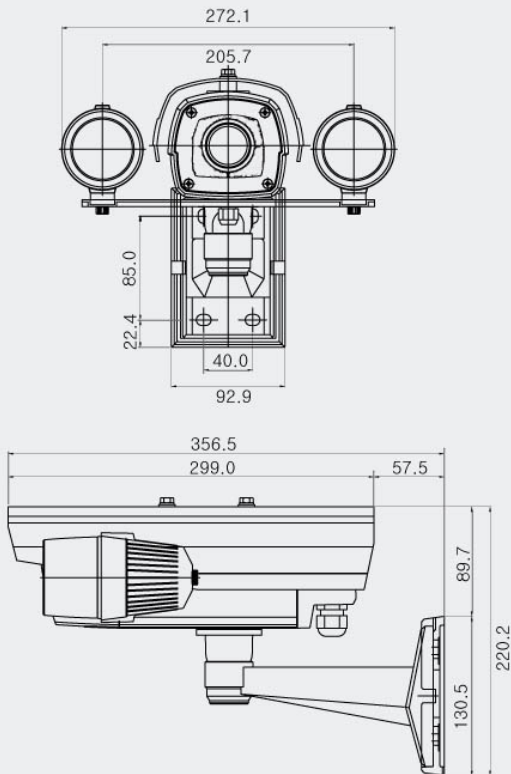

### SPECIFICATIONS

Model	CNB-BM5562NIR	CNB-BM5562PIR
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/4 Inch SONY Super HAD CCD	
Total Pixels	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Total / Effective Pixels	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	480 TV Lines	
Video Output	1.0V p-p (75Ω, Composite)	
S/N Ratio	More than 48dB(AGC Off)	
Lens	30x Optical Zoom (F1.6(W), F3.2(T) f=3.3~99.0mm) Video AF	
Digital Zoom Ratio	10x	
Min.Illumination	1Lux(Color), 0.5Lux(B/W), 0.000Lux (IR LED On)	
IR LED and Sensor	IR LED (850nm, 30°) 126EA, Sensor 1EA	
IR LED Visible Range	More than 70m(Indoor), 50m(Outdoor)	
Day&Night (ICR)	ICR (Sensor Type)	
OSD	On/Off	
DSS	OFF~128FLD (10 Steps)	
White Balance	Auto/Special/Indoor/Outdoor/Push Auto	
AGC,BLC	Auto/Manual	
Flickerless	On/Off	
Communication	RS-485	
IP Rating	IP65	
Supplied Voltage	DC9V~13.2V (Recommendation DC12V±0.5V)	
Dimensions(WxHxD)	272.1 x 220.2 x 356.5 mm	
Weight	Approx. 3.2 kg	