

# D2265NVF / D2265PVF

General Dome Camera D2 Series



## FEATURES

- 1/3" SONY Double Scan CCD
- High Resolution : 480 TV Lines
- Built-in DC Iris Vari-focal Lens (f=2.9~10mm)
- TDN(ICR), 3x Digital Zoom (On/Off)
- Min. Illumination : 0.0003Lux (DSS On, B/W)
- OSD(On Screen Display), RS-485 Interface(Pelco-D)
- WDR(Wide Dynamic Range), Privacy Zone
- Electronic Sensitivity-up(DSS) (On/Off)
- Extra Video Out Port for Easy Installatoin
- 3-Axis Movement for Free Lens Rotation
- Dome Size 100mm, 24VAC/12VDC Dual Voltage
- Audio Function (Option)

## OPTIONAL MODEL

- **D2260NVF/D2260PVF** : TDN(ICR), 12VDC
- **D2265NVD/D2265PVD**  
: without TDN(ICR), Built-in DC Iris Varifocal lens (f=4~9mm), 24VAC/12VDC
- **D2260NVD/D2260PVD**  
: without TDN(ICR), Built-in DC Iris Varifocal lens (f=4~9mm), 12VDC

## OPTIONAL ACCESSORY

- **IRC100/IRC200** : Wireless Remote Controllers
- **WDB100** : Wall Mounting Bracket




IRC100



IRC200

## DIMENSIONS

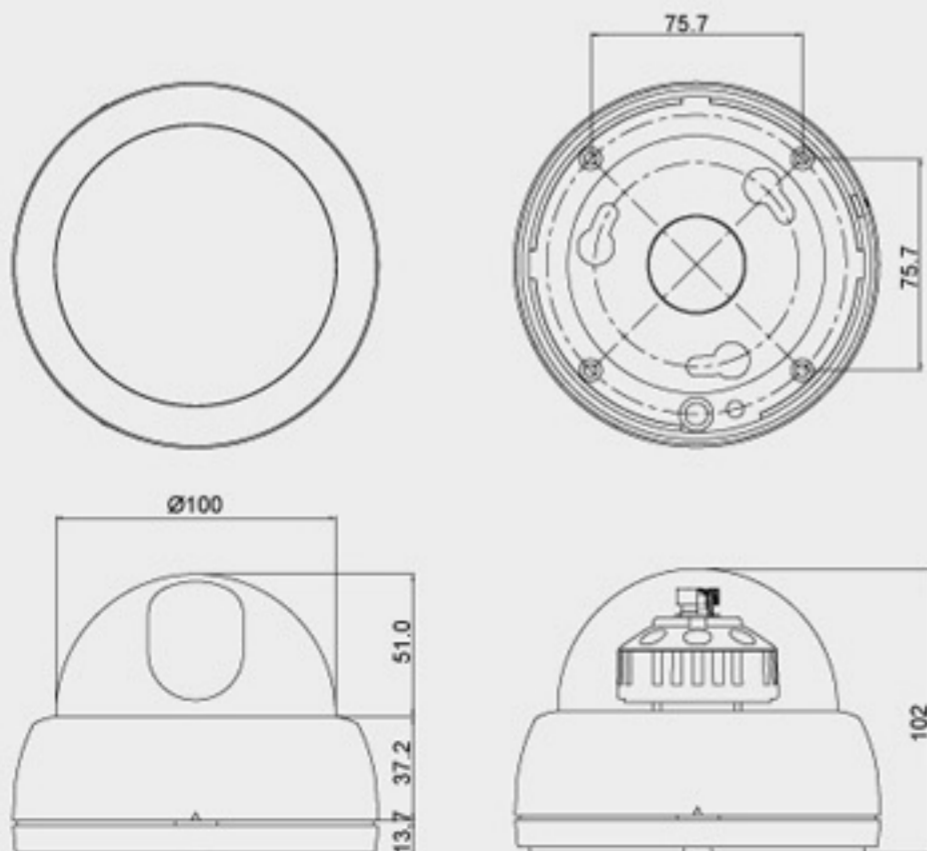

## SPECIFICATIONS

Model	D2265NVF	D2265PVF
Signal System	NTSC	PAL
Scanning System	2:1 Interface	
Scanning Frequency (H)	15.734kHz	15.625kHz
Scanning Frequency (V)	59.94Hz	50Hz
Image Sensor	1/3" SONY Duble Scan CCD	
Sync. System	Internal	
Total Pixels No.	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Effective Pixels No.	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	480 TV Lines	
Video Output Level	1.0 Vp-p (75Ω, Composite)	
S/N Ratio	More than 48dB (AGC Off)	
Lens	DC Iris Vari-focal Lens (f=2.9-10mm, F1.2)	
Digital Zoom Ratio	3x Digital Zoom(On/Off)	
Day&Night Type	Electronic Sensitivity-up(DSS), ICR (AGC type)	
Digital Slow Shutter	Max. 160FLD (On/Off)	
Min. Illumination	0.1Lux (Color), 0.0003Lux (DSS On, B/W)	
OSD	On / Off	
AGC	Off / Low / Middle / High Selectable	
BLC, Flickerless	On / Off	
Wide Dynamic Range	On (0-15, Max. 60dB) / Off	
White Balance	AWB (AUTO / HOLD / USER)	
Privacy Zone	On / Off (4 Programmable Zone)	
Electronic Shutter Speed	1/60sec	1/50sec
Supplied Voltage	24VAC (20V-28V) / 12VDC (10V-15V)	
Power Consumption	Max. 10W / 500mA	
Camera Construction	3-Axis Movement for Free Lens Rotation	
Dimensions	ø100 x 102(H) mm	
Weight (Net)	Approx. 366g	