



## KruZCam™



MINI SPEED DOME

### KPT-SPD101NH



### Features

- ⊙ The Smallest Mini Speed Dome out of all peers
- ⊙ Protocol Auto Detect
- ⊙ The quickest 10x Zoom Speed Dome
- ⊙ Preset Overwrite Protection
- ⊙ Built-in Auto Self Diagnostic Program
- ⊙ RS-485 Termination Free

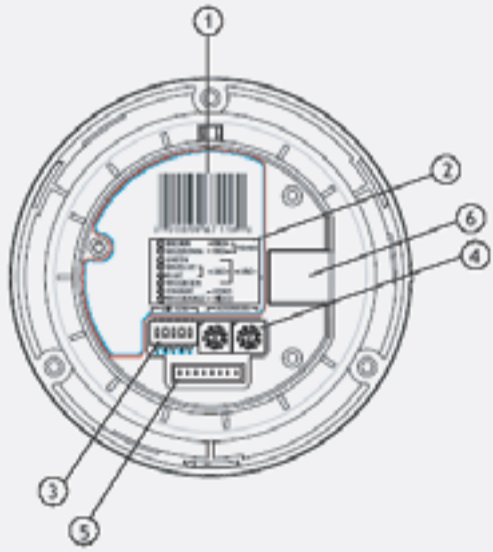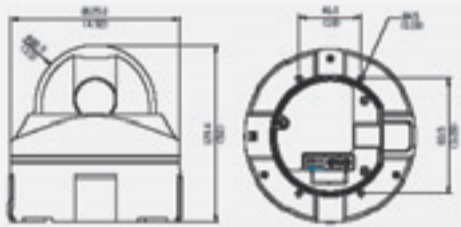

|   |                                       |
|---|---------------------------------------|
| ① | Serial Number                         |
| ② | Pin description                       |
| ③ | Dip switch for protocol and baud rate |
| ④ | Address switcher                      |
| ⑤ | Alarm in/out                          |
| ⑥ | RJ-45 female connector                |

|                  | Model No.               | KPT-SPD101NH                  |
|------------------|-------------------------|-------------------------------|
| <b>Camera</b>    | Image Sensor            | SONY 1/4" Interline CCD       |
|                  | Resolution              | 480 TV Lines                  |
|                  | Zoom                    | 10x Optical, 10x Digital Zoom |
|                  | Min. Illumination       | 0.7Lux @ F1.8                 |
| <b>Physical</b>  | Pan Travel              | 360' Continuous               |
|                  | Manual pan speed/sec    | 0.05' ~ 400'/sec              |
|                  | Preset pan speed/sec    | 400'/sec                      |
|                  | Tilt Travel             | 0' ~ 90'                      |
|                  | Manual tilt speed/sec   | 0.05' ~ 400'/sec              |
|                  | Preset tilt speed/sec   | 400'/sec                      |
|                  | Proportional pan & tilt | Yes                           |
|                  | Communication           | RS-485                        |
|                  | Power                   | AC24V                         |
| <b>Functions</b> | Preset                  | 240 Position                  |
|                  | Area title              | 8 Area names                  |
|                  | Privacy zone            | 32                            |
|                  | Tour                    | 8 Tour(x64 functions)         |
|                  | Pattern                 | 960 sec/8 pattern             |
|                  | Alarm(input/output)     | 4/1                           |
|                  | Protocol translation    | Pelco D / Pelco P             |