



# CNB-V2310NIR/V2310PIR

IR Vandal-Resistant Dome Camera




## Features

- 1/3 inch Sony Super HAD CCD
- High Resolution : 550 TV Lines
- Built-in Fixed Lens(f=3.8mm)
- Auto White Balance
- AGC, BLC, Flickerless (On/Off)
- **24EA IR LED, 1EA Sensor**
- **Min. Illumination : Night (0.00 Lux, IR LED On)**
- Extra Video Out Port for Installer
- 3-Axis Camera Construction
- Built-in Heater (Option), Camera Bracket (Option)
- Flush or Surface Mount
- Dome Size : 100mm



## DIMENSIONS

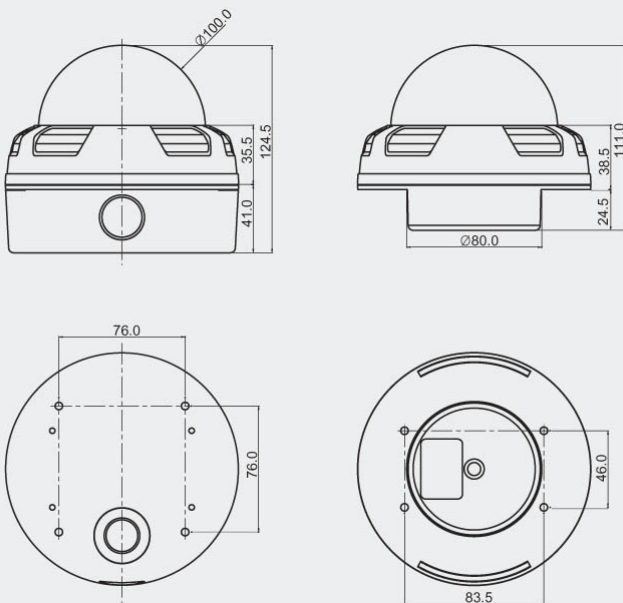

## SPECIFICATIONS

Model	CNB-V2310NIR	CNB-V2310PIR
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3 Inch SONY Super HAD CCD	
Total Pixels	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Total / Effective Pixels	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	550 TV Lines	
Video Output	1.0V p-p (75Ω, Composite)	
S/N Ratio	More than 50dB(AGC Off)	
IR LED & Sensor	Built in 24EA IR LED (850nm, 30°) & 1EA Sensor	
IR Visible Range	Max. 15m	
Lens	Fixed Lens (f=3.8mm)	
Min.Illumination	Day (0.3 Lux), Night(0.00 Lux, IR LED On)	
White Balance	Auto	
AGC,BLC,Flickerless	On/Off (Dip Switch)	
Shutter Speed	1/60~1/100,000 Sec.	1/50~1/100,000sec.
Supplied Voltage	DC 12V (10V~15V)	
Dimensions(ØxH)	Surface : 100.0 x 124.5 mm Flush : 100.0 x 111.0 mm	
Weight		