



18" CANOPY RANGE HOOD – 48", 36", 30"
E488WV120S, E368WV60ES, E308WV60ES
professional series



36" model shown

18" CANOPY RANGE HOOD

Size	
Installation Type	
Air Discharge	
Air Delivery	
Blower Type	
Controls	
Infinite-Speed Blower	
Dual Halogen Lights	
Dishwasher Safe Aluminum Filters	
Exhaust Duct	
Diameter of Duct	

E488WV120S	E368WV60ES	E308WV60ES
48"	36"	30"
Wall Mounted	Wall Mounted	Wall Mounted
Vertical or Horiz.	Vertical or Horiz.	Vertical or Horiz.
1200 CFM	600 CFM	600 CFM
Dual Centrifugal	Centrifugal	Centrifugal
Dial	Dial	Dial
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
External	External	External
10"	10"	10"

SPECIFICATIONS

Cutout Dimensions –			
Height	18"	18"	18"
Width	48"	36"	30"
Depth	11-7/8"	11-7/8"	11-7/8"
Electrical – 120 V AC/60 Hz/ 15 or 20 Amps	Required	Required	Required
Product Weight	103 Lbs.	64 Lbs.	55 Lbs.
Shipping Weight	108 Lbs.	67 Lbs.	58 Lbs.
UPC (0-12505-)	55611-1	55710-1	55711-1

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxusa.com.

18" Canopy Range Hood Specifications

- Product Weights – (48") 103 Lbs. / (36") 64 Lbs. / (30") 55 Lbs.
- Wall-Mount Installation – can be ducted vertically or horizontally.
- Electrical Requirements – 120 Volts AC, 60 Hertz, 15 Amps Dedicated Circuit
- Total Connected Load – 1.4 kW (12 Amps)
- Always consult local and/or national electric codes.
- Vent unit outside of building only.
- Diameter of Transition – (48") 10" Custom Required / (36") 8" / (30") 8"
- Diameter of Exhaust Duct(s) Required – (48") Dual 8" / (36") 8" / (30") 8"
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code).
- Cold weather installations should have additional backdraft damper installed.
- For most efficient operation, position hood low to cooktop. Recommended installation is 30" - 36" above countertop.

Dual-Centrifugal Blower (48")

Effectively removes the most persistent food and cooking odors.

Infinite-Speed Blower Control

The ultraquiet blower allows you to dial in the precise airflow needed.

Dual Halogen Lighting with Dimmer Control

Two overhead halogen bulbs evenly illuminate the cooking surface and provide abundant light to enhance the cooking experience.

Dishwasher Safe Filters



Saturated filters can be rinsed and cycled through the dishwasher. The aluminum filter provides strength and durability not found in foam filters.

Wall-Mount Installation

This wall-mount hood provides power, illumination and 18 inches of height. It also offers the flexibility of both vertical and horizontal ducting.

Note: Refer to Product Installation Guide for detailed instructions on the web at www.electroluxusa.com.

E488WV120S

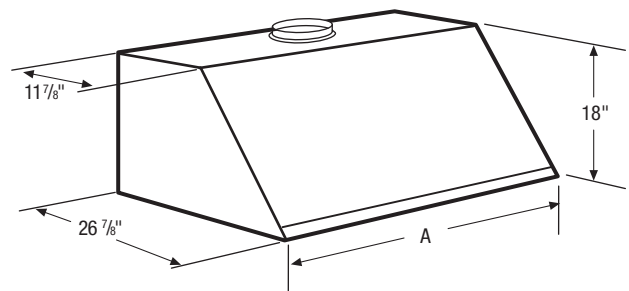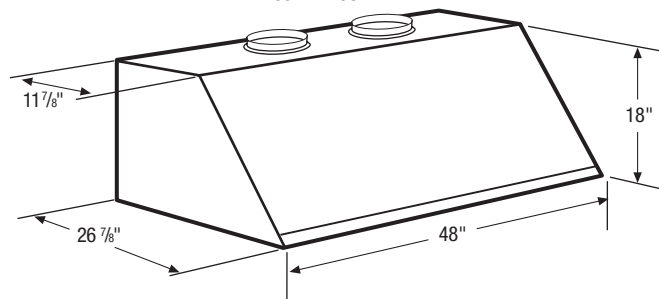

Dimensions

Vent Model	A
E368WV60ES	36"
E308WV60ES	30"



USA • 250 Bobby Jones Expressway • Augusta, GA 30907
1-877-4electrolux (1-877-435-3287) • www.electroluxusa.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4
1-800-668-4606 • www.electroluxca.com