

Axia^{plus}

a sleek canopy alternative

- wall canopy rangehood
- sleek styling
- 600 cfm PRO motor
- Silent Kit noise reduction
- 4 halogen lights
- 3 speed control
- integrated control panel
- stainless steel baffle filters
- modified pro depth
- convertible to ductless*
- Easy Cube mounting system
- some range: 3.5 - 6.5
- 6" round duct

* it is highly recommended that professional style cooking always be vented to the outside.



Size/Color/Model

36 Stainless 630000803

- a **24" High Backsplash (must also order Backsplash Adapter below)**
- C 24" high, mounts to the wall beneath the rangehood for a coordinated look
- C 36 x 24 Stainless 6098815
- e **30" High Backsplash (must also order Backsplash Adapter below)**
- S 30" high, mounts to the wall beneath the rangehood for a coordinated look
- S 36 x 30 Stainless 620000096
- Backsplash Adapter**
- Transition piece that molds to the curved bottom of the rangehood and connects it to the backsplash
- i Stainless 620000099
- High Ceiling Chimney Kit**
- One 40" upper chimney to replace 16 1/8" upper chimney that came with hood
- S Stainless 620000029



The slim stainless steel and glass profile of the Axia^{plus} is perfect for today's modern kitchen. The quiet, 600 cfm PRO motor is located inside the chimney, allowing for an ultra thin canopy. Part of the EUROPRO collection, the Axia^{plus} looks and performs equally well over professional or European style cooking surfaces.



Ductless Conversion Kit


- Lower Chimney with holes for ducting
- Ductless Diverter Assembly • Vent Grates
- Charcoal Filter

Stainless 620000040


Replacement Charcoal Filter 620000041

pro-style baffle filters with European flair and a built-in grease control system; bright halogen lights encircled by a stylish stainless bezel

Dimensional Diagrams

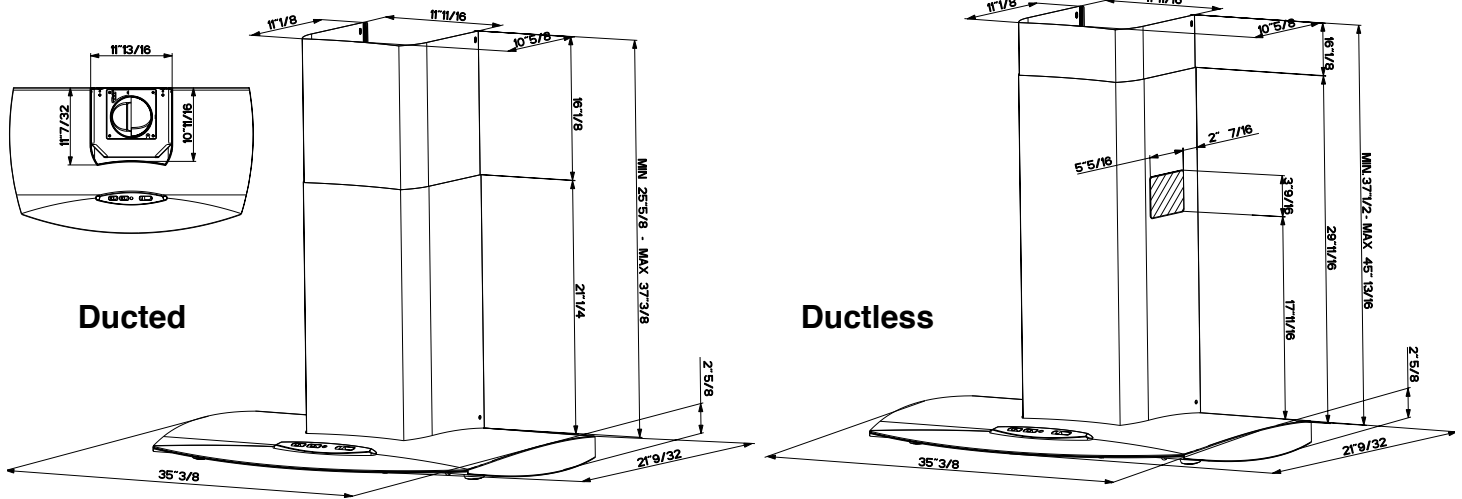

Pre-Planning Your Installation - Important: Consult the installation instructions before you begin installing this rangehood.

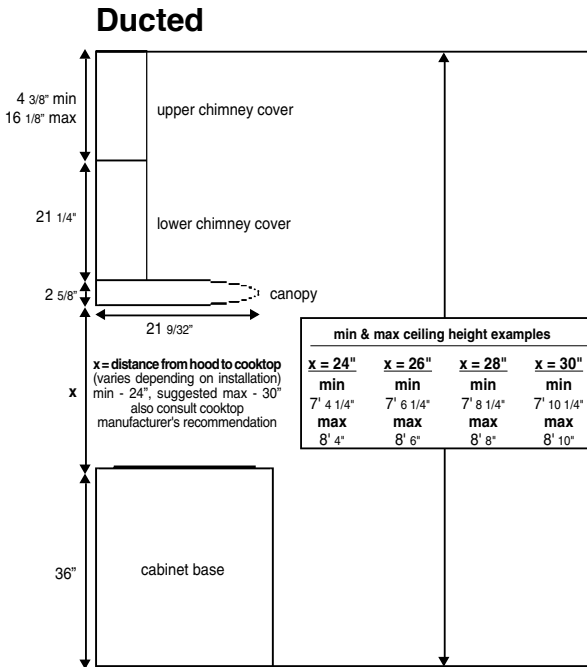


min & max ceiling height examples			
x = 24"	x = 26"	x = 28"	x = 30"
min	min	min	min
7' 4 1/4"	7' 6 1/4"	7' 8 1/4"	7' 10 1/4"
max	max	max	max
8' 4"	8' 6"	8' 8"	8' 10"

For ducted installations, the chimneys can be adjusted for ceilings between 7' 4 1/4" and 8' 10" depending on the distance between the bottom of the hood and the cooktop (**distance x in diagram**).

For ductless installations, the chimneys can be adjusted for ceilings between 8' 4 1/8" and 9' 6 7/16" depending on the distance between the bottom of the hood and the cooktop (**distance x in diagram**).

For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceilings, there is a **High Ceiling Chimney Kit** (one new 40" upper chimney which would replace the 16 1/8" upper chimney that came with the hood).

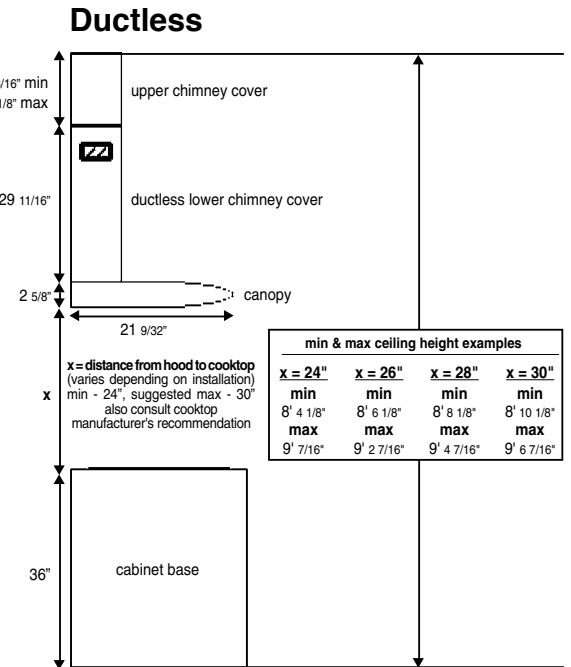


min & max ceiling height examples			
x = 24"	x = 26"	x = 28"	x = 30"
min	min	min	min
8' 4 1/8"	8' 6 1/8"	8' 8 1/8"	8' 10 1/8"
max	max	max	max
9' 7/16"	9' 2 7/16"	9' 4 7/16"	9' 6 7/16"

Note: If 24" or 30" High Backsplash and Backsplash Adapter are being installed, the distance between the bottom of the hood and the cooktop (**distance x in diagram**) is determined by the combined height of the Backsplash and Backsplash Adapter.

Pre-Planning Your Installation - Important: Consult the installation instructions before you begin installing this rangehood.

Make your ductrun as straight and short as possible. The ductrun should not exceed 35 equivalent feet if ducted with the required minimum of 6" round duct. Count 45° angles as 3 feet, 90° elbows as 5 feet, and 90° flat elbows as 12 feet.

For best results, use no more than three 90° elbows. Make sure that there is a minimum of 24" of straight duct between elbows if more than one is used. Do not install two elbows together. If you must elbow right away, do it as far away from the hood's exhaust opening as possible.

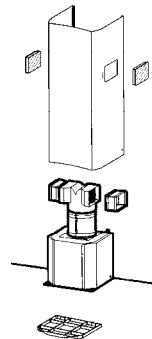

Ductless Installations*

For installations where ductwork is impossible or highly impractical, a **Ductless Conversion Kit** is available. A charcoal filter, which attaches under the blower assembly, absorbs smoke and odors. A ductless diverter assembly directs the air out to a lower chimney with vent grates cut into the sides.

* it is highly recommended that professional style cooking always be vented to the outside.

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.