

Nova

C L A S S I C

a tradition in canopy hoods

- wall canopy rangehood
- traditional styling
- 600 cfm
- 2 halogen lights
- variable speed control
- disappearing control panel
- dishwasher safe grease filters
- convertible to ductless
- adjustable mounting system
- sone range: 3.5 - 6.5
- 3 1/4" x 10" duct



The Nova's classic design will bring harmony and style to your kitchen. Corners and edges are rounded for clean design and safety.



Size/Color/Model

30 Stainless	6032412
30 White	6032413
30 Black	6032414
36 Stainless	6032409
36 White	6032410
36 Black	6032411

a C C e S	24" High Backsplash	
	24" high, mounts to the wall beneath the rangehood for a coordinated look	
	30 x 24 Stainless	6098835
	30 x 24 White	6098836
	30 x 24 Black	6098837
	36 x 24 Stainless	6098815
	36 x 24 White	6098816
	36 x 24 Black	6098817

S O r	30" High Backsplash	
	30" high, mounts to the wall beneath the rangehood for a coordinated look	
	30 x 30 Stainless	620000095
	36 x 30 Stainless	620000096

S O r i e S	Wire Rack	
	Includes attachments for mounting to cabinets on both sides	
	30 Chrome	6099970
	30 White	6099971
	30 Black	6099972
	36 Chrome	6095040
	36 White	6095041
	36 Black	6095042

S O r i e S	Wire Rack Hanger Kit	
	For mounting wire rack to back wall if there are no cabinets to attach rack to	
	Chrome	6099920
	White	6099921
	Black	6099922

S O r i e S	Utensil Bar	
	Stainless steel bar for hanging utensils under the sides or back of the canopy	
	Side - 15 Stainless	6099924
	Back - 30 Stainless	6099927
	Back - 36 Stainless	6099925

S O r i e S	Cathedral Chimney Kit	
	One 4' lower chimney and one 4' upper chimney	
	Stainless	6097140
	White	6097141
	Black	6097142




S O r i e S	High Ceiling Chimney Kit	
	One 40" upper chimney to replace 20" upper chimney that came with hood	
	Stainless	6099757
	White	6099758
	Black	6099759

S O r i e S	Ductless Conversion Kit	
	Includes: • Lower Chimney with holes for ducting • Ductless Diverter • Vent Grates • Two Charcoal Filters	
	Stainless	6097110
	White	6097111
	Black	6097112

Replacement Charcoal Filters 6093034

Electrical Knockout & Hardware Mounting Diagrams

Dimensional Diagram

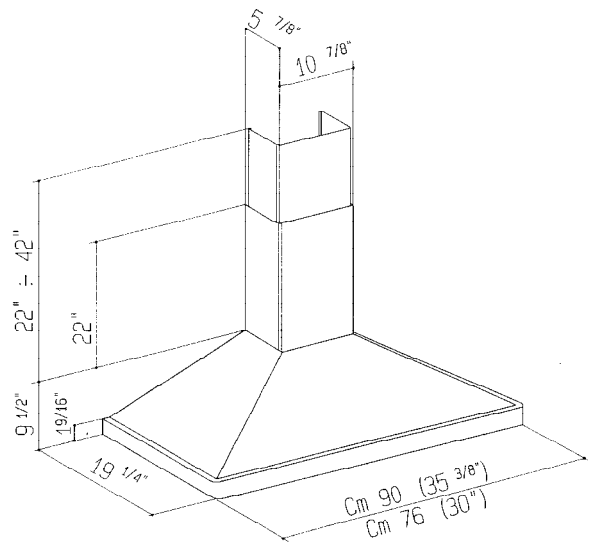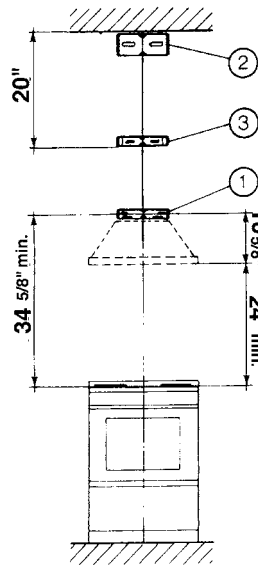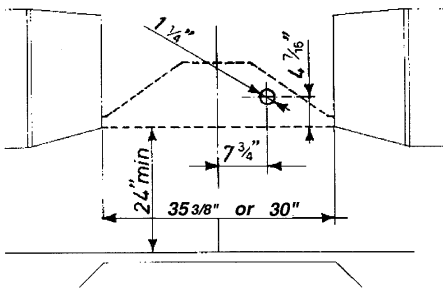


Pre-Planning Your Installation - Important: Consult the installation instructions before you begin installing this rangehood.

The Nova chimneys are adjustable and designed to meet varying ceiling heights. The chimneys can be adjusted for ceilings between 7' 8 1/2" and 9' 9 1/2" depending on the distance between the bottom of the hood and the cooktop (**distance x in diagram below**).

Pre-Planning Your Ductwork - Important: Consult the installation instructions before you begin installing this rangehood.

Make your ductrun as straight and short as possible. The ductrun should not exceed 35 equivalent feet if ducted with 3 1/4" by 10" rectangular duct. Count 45° angles as 3 feet, 90° elbows as 5 feet, and 90° flat elbows as 12 feet.


For best results, use no more than three 90° elbows. Make sure that there is a minimum of 24" of straight duct between elbows if more than one is used. Do not install two elbows together. If you must elbow right away, do it as far away from the hood's exhaust opening as possible.

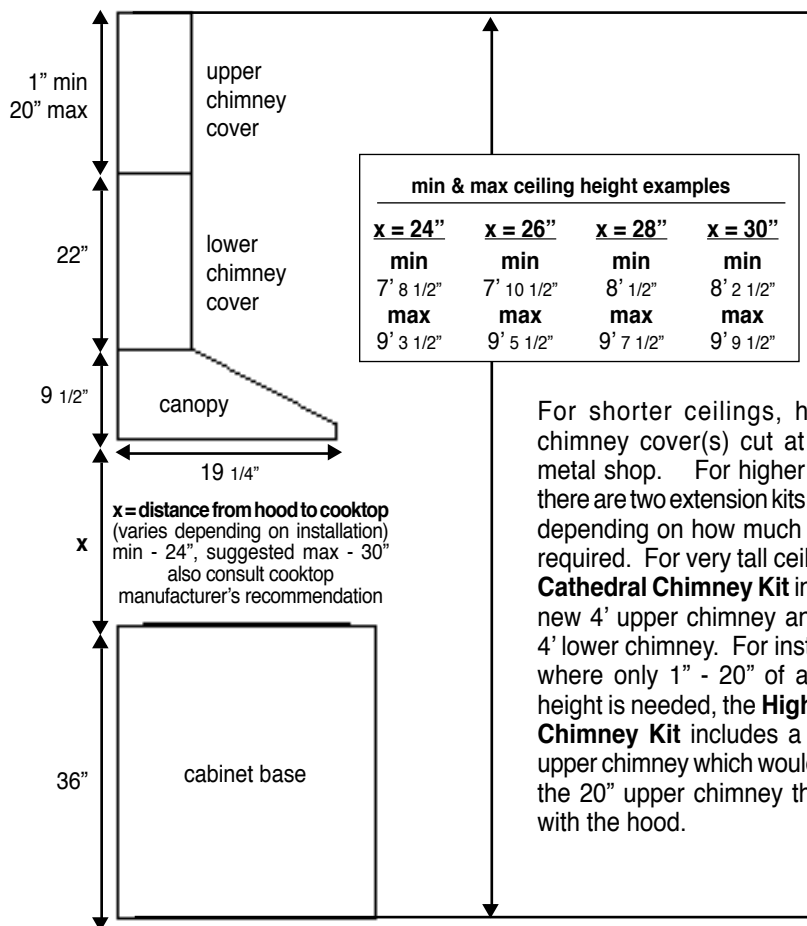

For shorter ceilings, have the chimney cover(s) cut at a sheet metal shop. For higher ceilings, there are two extension kits available depending on how much height is required. For very tall ceilings, the **Cathedral Chimney Kit** includes a new 4' upper chimney and a new 4' lower chimney. For installations where only 1" - 20" of additional height is needed, the **High Ceiling Chimney Kit** includes a new 40" upper chimney which would replace the 20" upper chimney that came with the hood.

Ductless Installations

For installations where ductwork is impossible or highly impractical, a **Ductless Conversion Kit** is available. Charcoal filters, which attach to the blower assembly, absorb smoke and odors. A ductless diverter directs the air out to a lower chimney with vent grates cut into the sides.

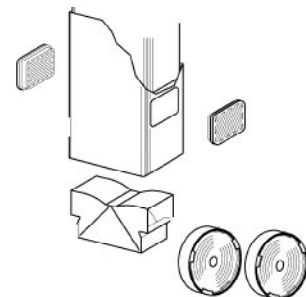

WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.