




THE SIGN OF A GREAT COOK®

www.jennair.com

# BUILT-IN DISHWASHER

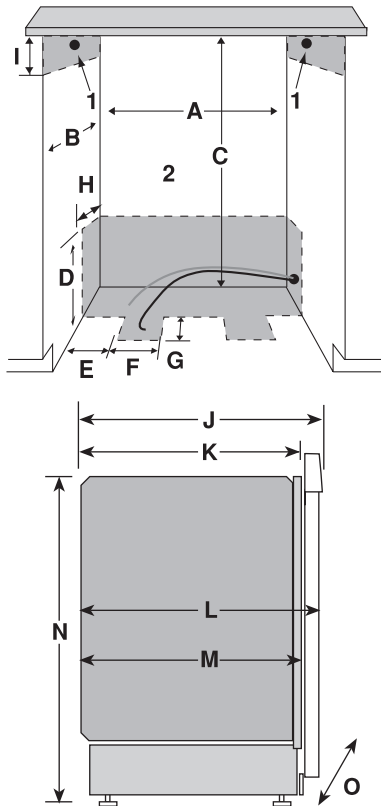

## Deep Tub Dimensions

■	Inches □	Centimeters
A □	24 □	61.0 □
B □	24 □	61.0
C □	34-35 □	86.4-88.9
D □	7 □	17.8
E □	3 □	7.6 □
F □	5 □	12.7
G □	8 □	20.3 □
H □	5 □	12.7
I □	3 □	7.6
J □	23 7/8 □	60.6
K <sup>8</sup> □	22 1/2 □	57.2 □
L <sup>9</sup> □	23 7/8 □	60.6
M □	19 1/2 □	49.5
N □	33 1/2 min. - 35 max. □	85.1 min. - 88.9 max.
O <sup>10</sup> □	23 7/8 □	60.6

### Notes:

1. □ Preferred drain area.
2. □ Keep back free of drain, water and electrical supply.
3. □ Minimum 32" drain loop, 1/2" I.D. (Inside Diameter) minimum. Floor drains require a siphon break.
4. □ Electrical and plumbing should meet all local and national codes.
5. □ Electrical and water supplies should enter cabinet opening on the floor, or through the back or side walls, □ as shown in the shaded portion of the drawing.
6. □ Connections preferably located toward left side of dishwasher. Care should be taken to route water □ and electrical away from motor and blower (if equipped).
7. □ When installing dishwasher in or near a corner, allow enough room for door to open without interfering □ with cabinet drawers or hardware.
8. □ Recommended location of counter top edge is 24" for optimum viewing of upswept controls.
9. □ Add 1 1/4" to depth for Pro-Style® model timer dial.
10. □ Product Width

**Important:** Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions that accompany each product before selecting cabinetry, making cutouts or beginning installation.