

This Data Sheet Includes Information On

**KitchenAid**

- **Product Model Number (s):**  
Professional Gas Cooktop:  
KGCP467JSS

- **Dimensions (Actual Size)**

- Overall width: 35 7/8"
- Overall depth: 26 1/4"
- Distance from countertop to bottom cutout: 7 1/2"
- Cutout width and depth: see pg 3
- Min. spacing from cooktop edge to nearest vertical combustible wall to the RIGHT: 12 5/16"
- Min. spacing from cooktop edge to nearest vertical combustible wall to the LEFT: 12 5/16"
- Min. spacing from cooktop edge to nearest vertical combustible wall to the REAR (for island trim installations): 2"
- Min. spacing from cooktop edge to nearest vertical combustible wall to the REAR (for backguard installations): 3"
- Minimum distance between cooktop and vent hood directly above: 30"
- Minimum width of hood directly above: 36"
- Maximum depth of cabinets directly above and adjacent: 13"

- **Additional Information**


- Cooktop must be installed in conjunction with a suitable overhead vent hood. Downdraft ventilation is not recommended.
- The vent hood blower should provide at least 600 CFM and up to 1200. For standard wall installations the minimum depth of the hood is 24" and the minimum width is 36". For island installations the minimum depth of the hood is 30" and the minimum width is 36" at the bottom (without adjacent upper cabinetry).
- 48" minimum clearance between top of cooking platform and bottom of a non-combustible wood or metal cabinet.
- Power supply: 120 volts, 60 Hz. single phase 15 amp circuit. Power supply must be properly grounded and polarized for safe and proper operation. 36" 3 prong cord is included with unit.

See pages 2-3 for more additional information


Subject to change without notice. This system is designed to be updated daily if necessary. Dimension Express is not responsible for use of superseded, voided, or outdated data sheets. Because of the difficulty or impracticability of determining actual damages, liability of Dimension Express shall not exceed \$50.00.

Copyright © Dimension Express, 2000.


231

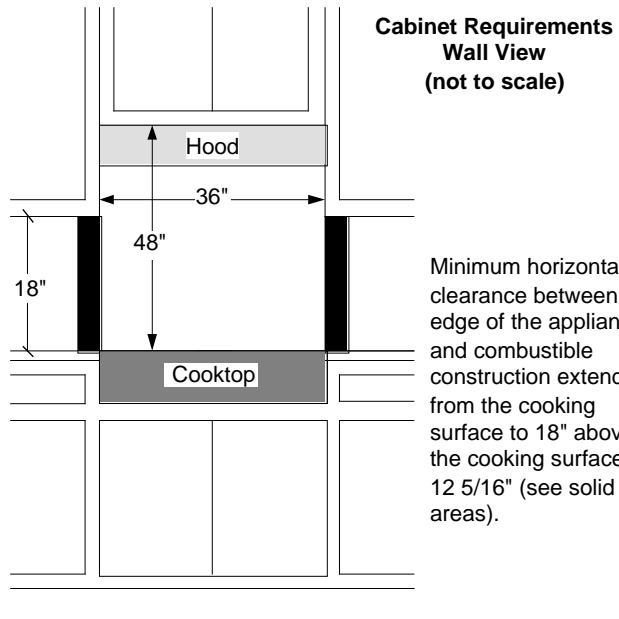

Minimum horizontal clearance between the edge of the appliance and combustible construction extending from the cooking surface to 18" above the cooking surface is 12 5/16" (see solid areas).

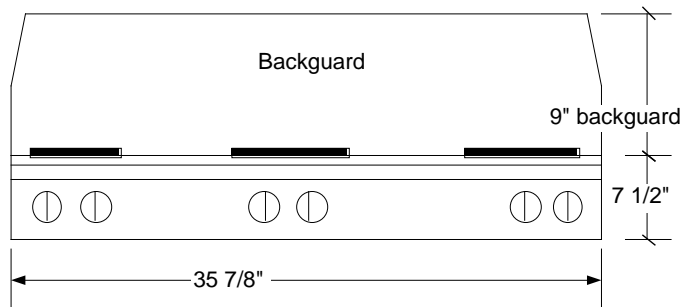

**Front and Side View of Cooktop and Backguard (not to scale)**

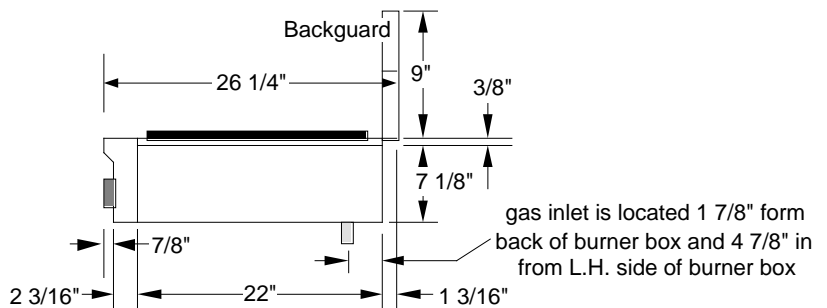

**Front and Side View of Cooktop and Backguard (not to scale)**


• NEVER reuse Data Sheets. Data Sheets are subject to change without notice. Dimension Express is a FREE service bureau and is updated daily, it makes far more sense to spend the time necessary to request new Data Sheets for each project, as opposed to the problems, time, costs, and risks associated with reusing old Data Sheets.

- Call Dimension Express if you have any questions at (775) 833-3633 •
- Always refer to a current Code at a Glance or manufacturer directory •
- Data Sheet codes change on the first of odd numbered months at 12:01am •

BN • A231B149C150 • 001312 • 9351 • 72618

**Additional Information:**

- The backguard included with the unit must be installed when a standard 24" deep base cabinet is used and there is zero clearance between the back edge of the cooktop and combustible rear wall.
- For island installations or other installations with more than 1" clearance to the back wall, use the optional stainless steel island trim, included with the cooktop, to cover the backguard mounting flanges.
- Natural Gas Requirements- Connection: 1/2" N.P.T. Minimum 5/8" dia. flex line. Pressure: Set pressure 5" water column, supply pressure is 7" to 14" water column.
- LP Gas Requirements- Connection: 1/2" N.P.T. Minimum 5/8" dia. flex line. Pressure: 10" to 14" water column. A regulator is required at the LP source to provide a maximum of 14" W.C. to the cooktop regulator.
- A manual shut off valve must be installed in the gas line and be reachable for installation and service.
- The cooktop is designed to hang from the countertop from its side flanges. Be sure to install support cleats secured to cabinet sides or build a support deck 8" below the countertop surface to support the weight of the cooktop (cut a 4 11/16" x 6 7/8" hole in the left rear corner for gas inlet and power cord clearances).

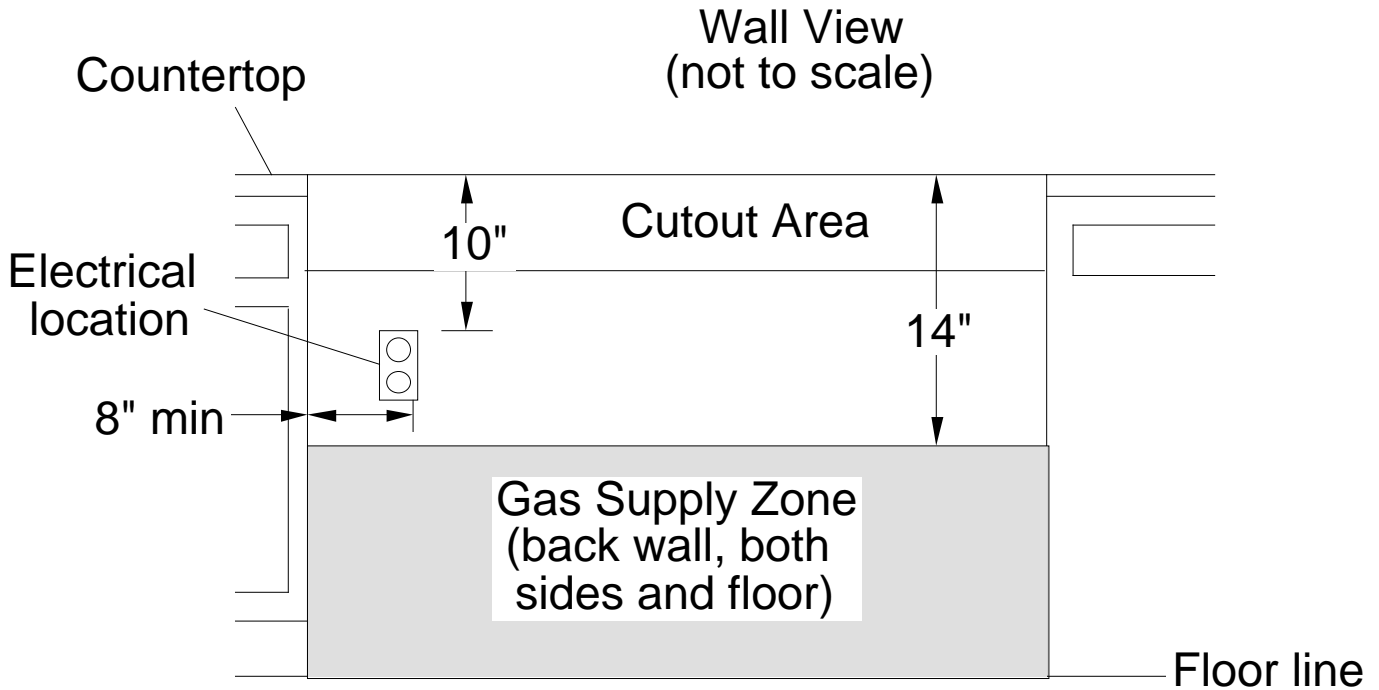

Subject to change without notice. This system is designed to be updated daily if necessary. Dimension Express is not responsible for use of superseded, voided, or outdated data sheets. Because of the difficulty or impracticability of determining actual damages, liability of Dimension Express shall not exceed \$50.00. Copyright © Dimension Express, 2000.

• NEVER reuse Data Sheets. Data Sheets are subject to change without notice. Dimension Express is a FREE service bureau and is updated daily, it makes far more sense to spend the time necessary to request new Data Sheets for each project, as opposed to the problems, time, costs, and risks associated with reusing old Data Sheets.

- Call Dimension Express if you have any questions at (775) 833-3633 •
- Always refer to a current Code at a Glance or manufacturer directory •
- Data Sheet codes change on the first of odd numbered months at 12:01am •

