



N3615CH Tri-Max Aerator

0.5 – 1.0 – 1.5 GPM (1.8 – 3.7 – 5.7 LPM)

Conservation with a twist! Tri-Max™ is a unique, three-flow rate aerator, allowing you to select your flow rate to save more.


- Three flow rate options: 0.5, 1.0 and 1.5 gallon per minute (1.8, 3.7 and 5.7 litre per minute)
- Patented FlexFlo™ technology, a unique 3-way pressure compensating device. Non-removeable and provides a constant output of water regardless of pressure at the selected flow rate.
- Solid brass with easy grip turn dial for selecting flow rate
- Stylish, modern housing
- Dual-thread brass connection
 Male: 15/16-27 Female: 55/64-27
- Overall dimensions: 1.3" diameter x 1" (33 x 25.4mm)

Certifications:

Meets or exceeds: ASME A112.18.1 / CSA B125.1; ANSI/NSF 61
 Chrome plated parts meets ASTM B368 for corrosion testing



0.5/1.0/1.5 GPM Flow Rate

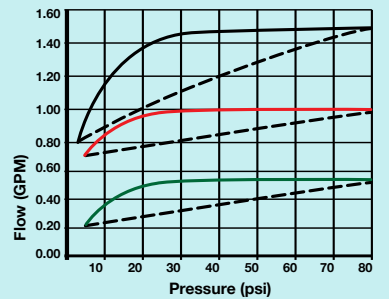

1.5 Pressure Compensated Spray
 1.0 Pressure Compensated Spray
 0.5 Pressure Compensated Spray
 Non-Pressure Compensated Spray

Savings

Savings	Water (gallons)	Electric (kWh)	Gas (therms)	Dollars
Electric Water Heater	7,300	949	n/a	\$143
Gas Water Heat	7,300	n/a	52	\$91

*based on FEMP/DOE data and an average water rate of \$4 per 1,000 gallons.
 *based on 1.5 GPM