

FRIGIDAIRE

GALLERY



Side-by-Side Refrigerator

FGHC2344K F

23 Cu. Ft. Counter-Depth



Signature Features



Most Usable Shelf Space¹

Our adjustable shelves have room to store more.



Real Stainless Steel

Real stainless steel with a protective coating that reduces fingerprints and smudges so it's easy to clean.



SpaceWise™ Organization System

Our SpaceWise™ Organization system makes it easy to keep food organized and easy to find when you need it.



Best-in-Class Ice & Water Filtration²

PureSource Ultra™ Water Filtration offers best-in-class water filtration so you get cleaner, better-tasting water at your fingertips.

Powerful Performance

Quiet Pack

Performance-Driven Style

Express-Select™ Controls

Beautiful Lighting

Digital Electronic Temperature Controls

Tall, 7-Button Water & Ice Dispenser

Textured Cabinet

SpaceWise™ Design

Refrigerator -

2 Sliding SpillSafe™ Glass Shelves

Fixed SpillSafe™ Glass Shelf

Chill Drawer

2 Clear Crispers with Adjustable Humidity Controls

Wine Rack/Can Dispenser

2 Adjustable Clear 2-Liter Door Bins

Fixed Clear Gallon Door Bin

Clear Condiment Bin

Freezer -

2 Fixed Wire Shelves

Space-Saver Shelf

2 Tall Wire Baskets

3 Clear Fixed Door Bins

Tilt-Out Wire Door Shelf

ADA Compliant*

ENERGY STAR®

Sabbath Mode (Star-K® Certified)



Capacities

Total Capacity 22.6 Cu. Ft.

Refrigerator Volume 14.1 Cu. Ft.

Freezer Volume 8.5 Cu. Ft.

Overall Exterior Dimensions

Height (Including Hinges & Rollers) 69-3/8"

Width 35-5/8"

Depth 26-7/8"

Available in:




Stainless (F)

*When properly installed, meets the appliance standards in the American with Disabilities Act and the Architectural Barriers Act Accessibility Guidelines as published by the United States Access Board on June 23, 2004.

¹As compared to other counter-depth side-by-side models.

²As compared to other consumer refrigeration water filtration systems.

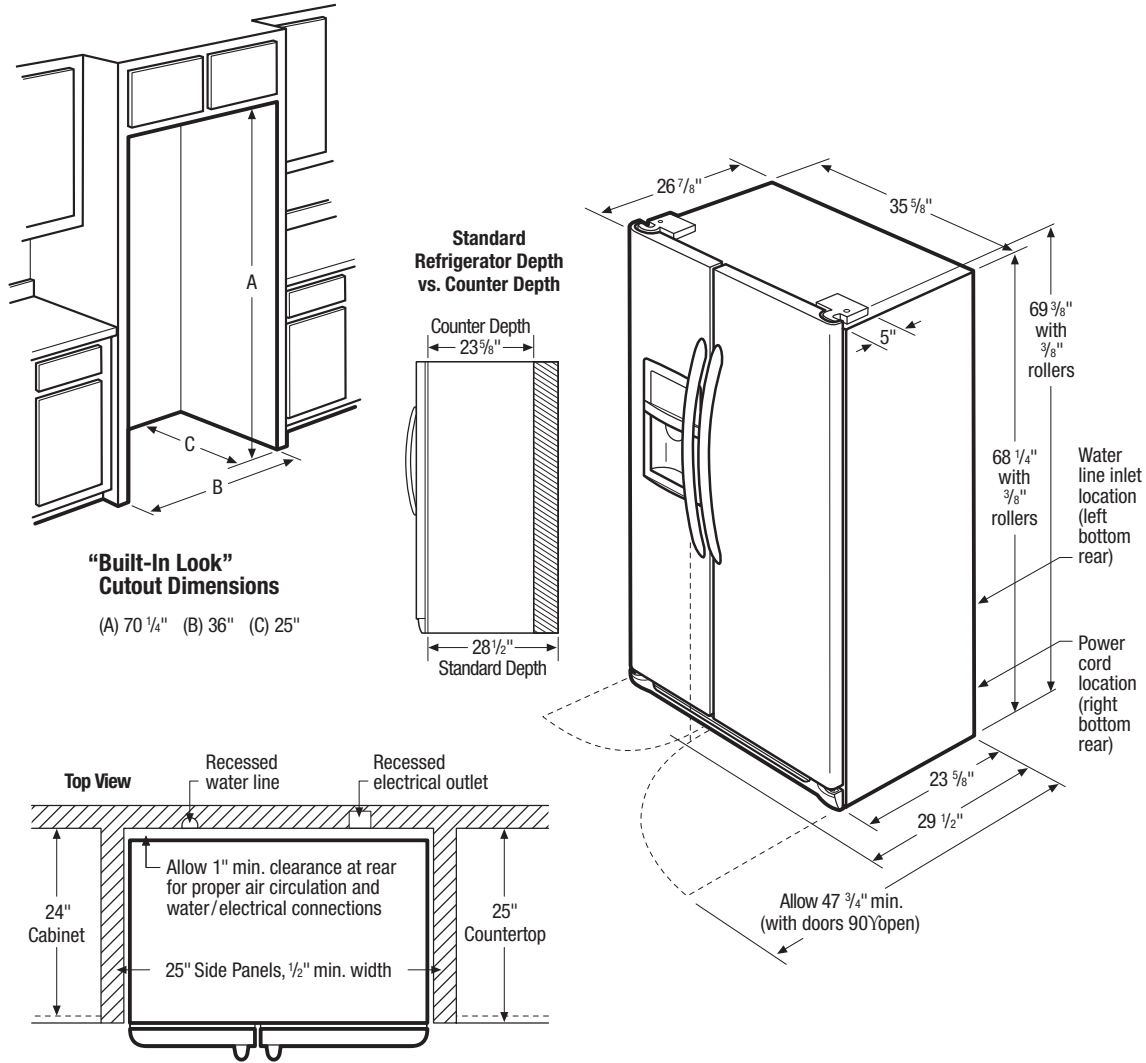

Side-by-Side Refrigerator Specifications

- Product Shipping Weight (approx.) - 325 Lbs.
- Voltage Rating - 120V/60 Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (*Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.*)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.

- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure - Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.