Freezer Column
with ice and water dispenser
Fully integrated

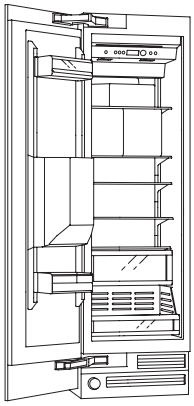

RF 463-700*

Right-hinged, width 24"

RF 463-701*

Left-hinged, width 24"

*Planned availability
mid 2007

RF 463-700*/701*

– Fully integrated appliances.
Doors open to a 115-degree angle, so that the large drawers can be pulled out completely.

– Stainless steel, aluminum and glass interior to keep the refrigerator naturally hygienic, just like in a professional kitchen.

– Integrated automatic ice maker with water connection and dispenser for ice cubes, crushed ice and chilled water.

Niche height 84".
Niche width 24".
Net volume 12.2 cu.ft.

Electronic temperature control with digital temperature display.
Automatic defrosting with defrost water evaporation.
Energy-saving vacation mode.
Open-door and malfunction warning system.

Freezer compartment:
Fast freezing.
Temperature adjustable from 7° to -9°F.
Four solid metal shelves, three of which are manually adjustable.
A large, fully extendable drawer with transparent front.
A regular, fully extendable drawer with transparent front.
Interior lighting with two ceiling spots.
Four solid aluminum door bins, three of which are height-adjustable, one has a front flap.

Ice dispenser:
Integrated automatic ice maker in the freezer compartment, with ice bin.
Ice cubes and crushed ice.
Anti-Clump ice system.
Ice making capacity approx. 3.3 lbs./24 hrs.
Supply at normal operation approx. 8.8 lbs.
Chilled water supply approx 1.3 quarts.
Ice and water dispenser accommodates large pitchers and sports bottles.
Illuminated ice and water dispenser.
Ice maker can be switched off separately.

Energy consumption
0.40/0.44 kWh/24 hrs.

Optional accessories:	**RA 035-030**
	Aluminum bottle cooler
	RA 422-610 Stainless steel door
	panel with handles for RF 463. Panel thickness 3/4".
	RA 422-630* Aluminum door
	panel with handles for RF 463. Panel thickness 3/4".
	RA 461-614 Ventilation grill
	Stainless steel, for RF 463, right hinged
	RA 461-615 Ventilation grill
	Stainless steel, for RF 463, left hinged
	RA 450-010 Activated charcoal
	filter for water filter system including saturation indication.

*Later availability

Planning notes:

Flat hinge.
Door hinges on the right, reversible if necessary.
Plan the electric outlet behind the appliance per installation instruction.

Rating:

Total connected load 0.5 kW.
Water connection.
Connecting cable length 78".
Supply hose length 118".
Total Amps: 15.
120V / 60Hz

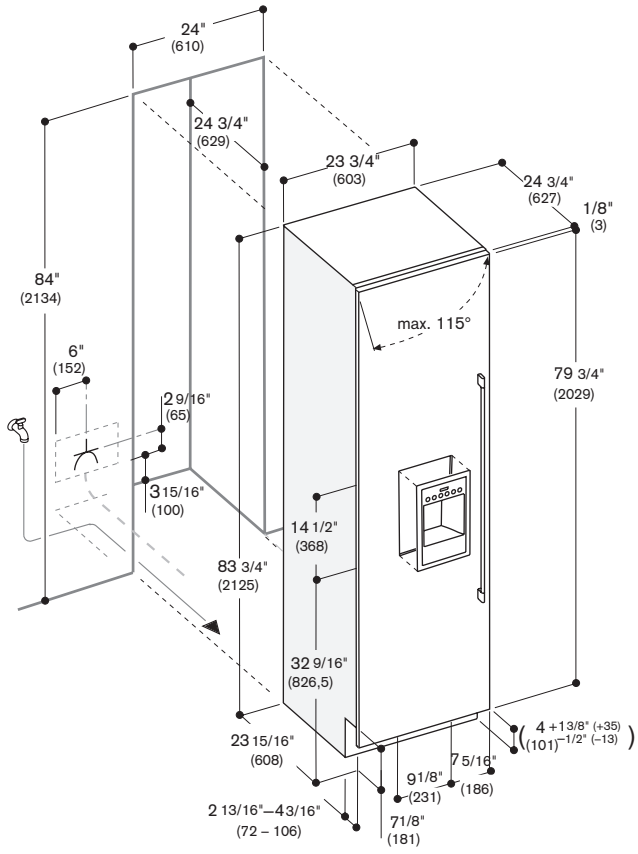

Numbers indicated inside parenthesis ( ) = mm