


Cantilever Rack Uprights


Upright load per side = 3 arm levels @ 2,000 lb. each = 6,000 lbs. per side.
 Select regular-duty upright No. 31026 (144" x 36" double-face upright with 6,777 lb. capacity per side).

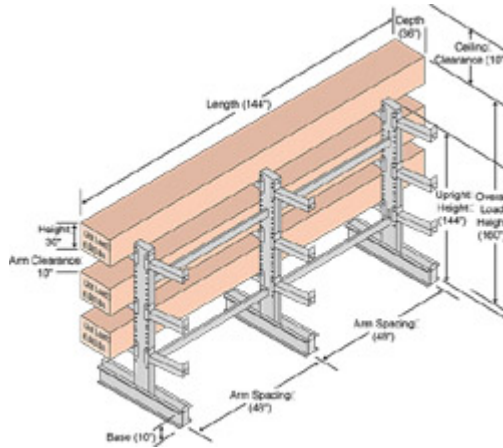

Note: Base load not included to determine upright capacity.

End view of regular, heavy and extra heavy-duty uprights.

Nominal Depth	A	B	C	D
Regular and Heavy-Duty				
24"	24"	37-1/8"	58"	10"
30"	30"	43-1/8"	70"	10"
36"	36"	49-1/8"	82"	10"
42"	42"	55-1/8"	94"	10"
48"	48"	61-1/8"	106"	10"
Extra Heavy-Duty				
36"	36"	51-1/8"	84"	12"
48"	48"	63-1/8"	108"	12"

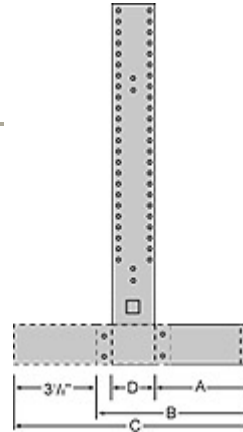

Regular Duty Uprights* With Bases

Upright Height	For Arm Length	Capacity Per Side	Max. Defl.	Cat. No. Single Face	Cat. No. Double Face
8'0"	18"	13,555	1.03"	31001	31002
8'0"	24"	10,166	1.03"	31001	31002
8'0"	30"	8,133	1.03"	31003	31004
8'0"	36"	6,777	1.03"	31005	31006
8'0"	42"	5,809	1.03"	31009	31010
10'0"	18"	13,555	1.61"	31011	31012
10'0"	24"	10,166	1.61"	31011	31012
10'0"	30"	8,133	1.61"	31013	31014
10'0"	36"	6,777	1.61"	31015	31016
10'0"	42"	5,809	1.61"	31017	31018
10'0"	48"	5,100	1.61"	31019	31020

Cantilever Rack Uprights

12'0"	18"	13,555	2.32"	31021	31022
12'0"	24"	10,166	2.32"	31021	31022
12'0"	30"	8,133	2.32"	31023	31024
12'0"	36"	6,777	2.32"	31025	31026
12'0"	42"	5,809	2.32"	31027	31028
12'0"	48"	5,100	2.32"	31029	31030

*Note: Uprights are not interchangeable with other Bases.

Note: All steel 50,000 psi minimum yield. Safety factor = 1.65.

Heavy Duty Uprights* With Bases

Upright	For Arm	Capacity	Max.	Cat. No.	Cat. No.
Height	Length	Per Side	Defl.	Single Face	Double Face
8'0"	24"	22,000	1.09"	32001	32002
8'0"	36"	14,667	1.09"	32005	32006
8'0"	48"	11,000	1.09"	32009	32010
10'0"	24"	22,000	1.70"	32011	32012
10'0"	36"	14,667	1.70"	32015	32016
10'0"	48"	11,000	1.70"	32019	32020
12'0"	24"	22,000	2.45"	32021	32022
12'0"	36"	14,667	2.45"	32025	32026
12'0"	48"	11,000	2.45"	32029	32030

*Note: Uprights are not interchangeable with other Bases.

Note: All steel 50,000 psi minimum yield. Safety factor = 1.65.

Extra Heavy Duty Uprights* With Bases

Upright	For Arm	Capacity	Max.	Cat. No.	Cat. No.
Height	Length	Per Side	Defl.	Single Face	Double Face
8'0"	36"	27,055	1.05"	33005	33006
8'0"	48"	20,300	1.05"	33009	33010
10'0"	36"	27,055	1.64"	33015	33016
10'0"	48"	20,300	1.64"	33019	33020
12'0"	36"	27,055	2.36"	33025	33026
12'0"	48"	20,300	2.36"	33029	33030

*Note: Uprights are not interchangeable with other Bases.

Note: All steel 50,000 psi minimum yield. Safety factor = 1.65.

For Extra Heavy-Duty Uprights

Upright	Cat. No.	Cat. No.	Cat. No.	Quantity of
Height	48" Center*	72" Center*	96" Center*	Braces
8'0"	34706	34707	34708	2 ladder/1cross
10'0"	34709	34710	34711	3 ladder/2 cross
12'0"	34709	34710	34711	3 ladder/2 cross

For Regular and Heavy-Duty Uprights

Upright	Cat. No.	Cat. No.	Cat. No.	Quantity of
Height	48" Center*	72" Center*	96" Center*	Braces

Cantilever Rack Uprights

8'0"	34700	34701	34702	2 ladder
10'0"	34703	34704	34705	3 ladder
12'0"	34703	34704	34705	3 ladder

Available in Dove Gray (DD), Putty (PP) and Wedgewood Blue (BB) and safety Orange (SO).