

# SNK-119 1U 19" TFT LCD Sun Compatible 3-button Keyboard Optional USB KVM

## Model: SNK-119



## Features:

- **Sun Keys: STOP, HELP, AGAIN, PROPS, UNDO, FIND, OPEN, COPY, CUT, PASTE AND FRONT key.**
- **3-button trackball**
- **USB KVM connectors**
- **10-key keypad**
- **Outstanding key stroke feel**
- **Adjustable mounting brackets** from 15.4" to 31.1" (390 to 790 mm) (front to rear 19" mounts).
- Built-in on screen display controlled by integral membrane switches
- Standard D-sub 15-pin VGA input connector
- Slide rails have two fixed positions to prevent movement of the keyboard
- Supplied with 12V 5A remote power adapter (Single power source)

## Display Performance

Panel:	19" LCD panel
Display type:	TFT / LCD active matrix color
Resolutions:	1280 x 1024
Response time:	Tr=15ms/ Tf=10ms
Contrast ratio:	500 : 1 typical
Brightness:	250 cd/m <sup>2</sup> typical
Pixel pitch:	0.098mm (H) x 0.294mm (W)
Panel color:	16.7 million display colors
Viewing angle:	170° (Horiz.)/ 170° (Vert.)
Storage temp.	-20° C to 65° C
Operating temp.	0° C to 50° C
MTBF	20,000 hours

## With KVM Features Only

- **Multi-platform**-mix PCs, SUNs, IBMs, HPs, Compaq & DELL
- **Support 8 characters password protection** & search PC server name
- **Cascades for use with up to 128 servers**
- New keep alive feature safeguards server for power loss to the switch
- **Built-in microprocessor** emulation for each port boots up process
- **Auto scan-mode** for monitoring your servers at intervals 5 to 99s
- **Hot-pluggable** when adding or removing PC w/o powering down the switch
- Name you server up to **16 characters long**
- Supplied w/12V 1A remote power adapter (single power source)
- **Supplied with 8 screened cables 6ft long**  
No software needed & all mounting hardware included

## Weight

Model	KVM	Net / Gross weight
SNK-119	Non	24.0lbs / 42.0lbs (11kg/19kg)
SNK119-8	8-port	26.0lbs/ 46.0 lbs (12kg/21kg)
SNK119-16	16 port	29.0lbs / 48.0lbs (13kg/22kg)

## Keyboard




USB KVM Cables



## Rear View 8-ports KVM



Rear 16-ports KVM

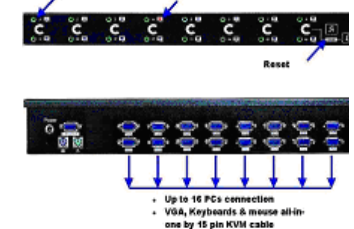

## KVM

Computer connectors:	8/16
Connector:	15-pin HDB type
Cascade level:	8
Max. access PCs:	128
Input VGA resolution:	1,920 x 1,440

## Power supply

Remote adapter:	110V - 220V AC Input 12V 5A Output
Adapter Size:	4.3"(L) x 2.4" (W) x 1.2"(H) (108x61x30mm)
Cable length from mains plug to adapter:	6ft (182cm)
Cable length from adapter to unit:	6ft (180cm)
Mains plug options available	