



## UV Sealer & Topcoat for Hardwood Flooring

### Technical Data Sheet

Date: 6/24/10

PAGE 1 OF 1

#### Shipping/Stacking of Parts:

Parts may be stacked and packaged immediately after cure.


#### Supportive Data

#### Taber Abrasion Test Results:

Note: The testing performed used **Ultra Wear Resistant UV Sealer & Topcoat – Hardwood Floor -5891** 30 sheen material and did not contain any ceramic additive. The test results are comparable to performance standards necessary for the wood flooring industry.

#### Taber Industries Model 5135

- 500 g weights
- S-42 Sandpaper strips fastened to S-32 Rubber Wheels (same as CS-0) Paper changed every 500 cycles.
- Debris was brushed off sandpaper every 100 cycles during testing
- 100% vacuum

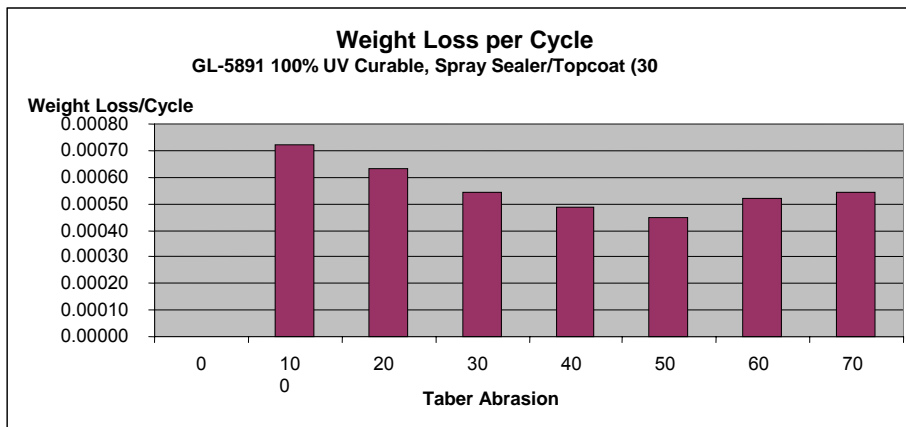

AVERAGE WEIGHT LOSS PER CYCLE **0.000556** GM