



94-98 Stainless Steel Radiator Cover Installation

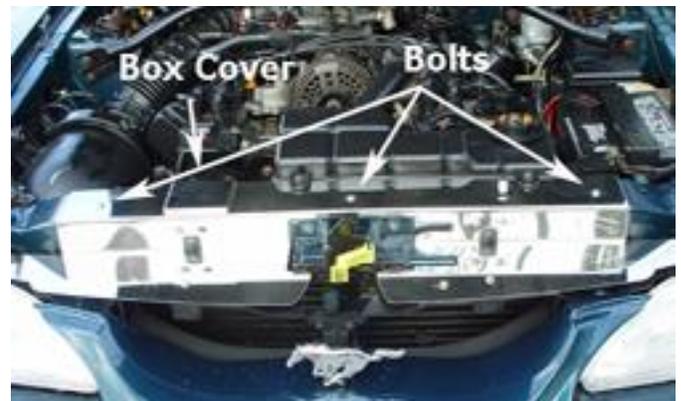

1). To start the disassembly remove the 6 push tabs holding the factory plastic cover in place. ****NOTE** Depending on the type of grill you have it will require removal of the tabs holding the front of the grill in place.** 2). Then remove the two nuts holding the radiator reservoir in place and move it out of the way.

3). Next take the radiator support bracket(s) and install the rubber grommet onto the short side of the bracket.

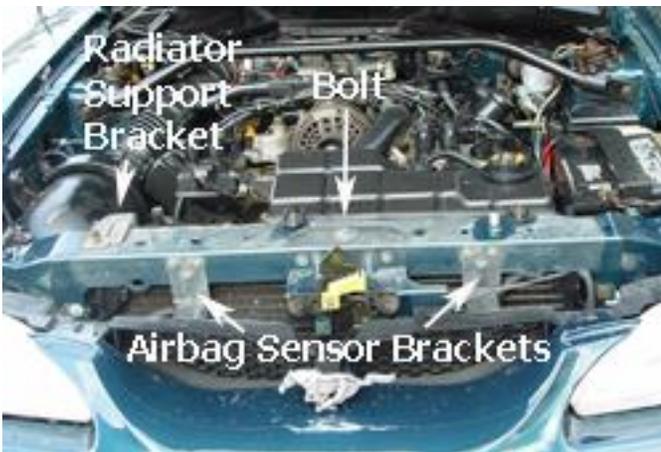

4). Remove the bolt from the center of the core support. 5). Remove the four bolts holding the two airbag sensors to the core support. 6). On 94-96's replace the factory radiator support bracket on the passenger side with the new bracket. On 97-98's replace both factory radiator support brackets with the ones provided.

7). Next put the box cover in place as shown above and lower the cover into place. 8). Screw in the three M6 screws with washers. The one on the far left also goes through the radiator support bracket. 9). Re-install the two nuts holding the radiator reservoir in place.



10). Screw in the four bolt through the cover, which hold the airbag sensors in place. This can be done by either removing the grill or with a friend holding the sensors in place from under the car. 11). Thread in the three bolts and nuts along the front of the radiator as shown above.

13). Then finally the last step is to re-install your grill cover that was removed in step 10.

12). Press the provided hood clip down into place. Take note of the angle the clip is in the picture above it goes in easier if one side is started first then pressed in.