



Model SH-18

Four-Chamber Tankless Electric Micro-Boiler

Description: The Model SH-18 four-chamber tankless electric space heater is designed for use in residential and commercial hydronic space heating applications such as, but not limited to, radiant floor heating, baseboard, hydro-heat pump and snow melting systems. This new micro-boiler is the ideal replacement for traditional boilers and tank-type heaters and is the enabling technology for use with active renewable energy systems such as solar and geothermal systems. The temperature activated control works effectively in low pressure and re-circulating systems. With optional equipment, the SH-18 can be used as the single heat source in combination systems for potable hot water and space heating. A minimum of 125 AMP whole house electrical service is recommended.

Features:

- UL 834 Approval Listing for Space Heating Applications
- Works with tubing and manifold systems
- No minimum flow activation required
- Built-in DSM Utility Integration option
- Compatible with Home Energy Management Systems
- Heats fluid mixtures including ethylene glycol (antifreeze)
- No moving parts
- Very small & compact
- Light weight modular construction
- No restriction to flow
- Standard 3/4 inch plumbing connections
- Microprocessor digital control
- Power sharing & variable power control technology
- Continuous venting
- Heats continuously only when needed, no storage
- Self-diagnostics
- Redundant safety devices
- High performance polymer nylon chamber material
- Built-in Leak detector and alarm
- Rust & corrosion resistant

Specifications:

Heat Output (max.): **61,430 BTU**
 Power Rating (max.): **18KW**
 Voltage Rating (Nominal): **240 VAC**
 Current Rating (max.): **75 AMPS**
 Energy Factor: **0.99+**
 Heating Elements: **4500 watts x 4**
 Circuits Required: **Two (2), 2-wire w/ ground**
 Breakers Required: **Two (2), double-pole**
 Breaker Size: **50 AMPS each x 2**

Flow Ratings:

Rise (Deg F) @ Flow (GPM)	Rise (Deg C) @ Flow (L/Min.)
61 °F @ 2.0 GPM	32 °C @ 8 L/min
49 °F @ 2.5 GPM	26 °C @ 10 L/min
40 °F @ 3.0 GPM	21 °C @ 12 L/min
30 °F @ 4.0 GPM	16 °C @ 16 L/min


Model SH-18



Exterior



Interior

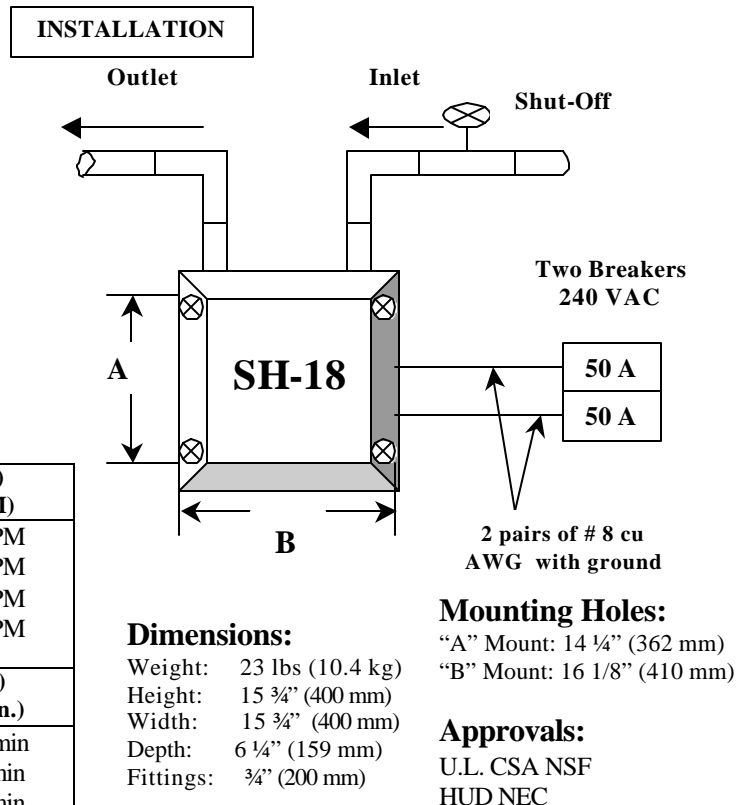

Dimensions:

Weight: 23 lbs (10.4 kg)
 Height: 15 3/4" (400 mm)
 Width: 15 3/4" (400 mm)
 Depth: 6 1/4" (159 mm)
 Fittings: 3/4" (200 mm)

Warranty is for Space Heating Applications only and does not cover use for residential or commercial water heating applications.