

*Preliminary*

# SU320KTX-1.7RT High Sensitivity InGaAs SWIR Camera




The compact SU320KTX-1.7RT is an InGaAs video camera featuring high-sensitivity and wide dynamic range. It provides real-time night-glow to daylight imaging in the Short Wave Infrared (SWIR) wavelength spectrum for passive surveillance and use with lasers. The camera delivers clear video at every lighting level from partial starlight to direct sunlight due to **on-board** Automatic Gain Control (AGC), image enhancement and built-in non-uniformity corrections (NUCs). Simultaneous Camera Link® digital output provides high quality 12-bit images for image processing or transmission. Low-power and light-weight with compact size enables easy integration into surveillance systems, whether hand-held, mobile or aerial.



## APPLICATIONS

- Low-light level imaging
- Covert surveillance with passive 24 hr/7 day operation
- Emission microscopy
- Imaging spectroscopy
- Astronomy
- Machine vision

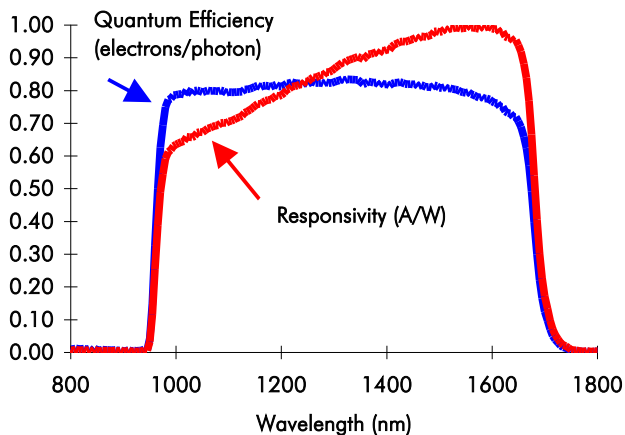

## FEATURES

- Highest sensitivity available in 900 nm to 1700 nm spectrum
- Images under partial starlight to direct sun illumination
- 320 x 240 pixel format, 40  $\mu\text{m}$  pitch
- Compact OEM module size < 3.8 in<sup>3</sup>
- Enclosed module size < 9.3 in<sup>3</sup>
- Low power < 1.6 W
- All solid state InGaAs imager
- On-board non-uniformity corrections
- Simultaneous digital & analog outputs
- Room temperature FPA operation
- Includes a C-mount lens adaptor and lens
- OEM version for easy integration into UAV, handheld or robotic systems

Sensors *knows* IR™

3490 U.S. Route 1 • Princeton, New Jersey 08540  
Phone: (609) 520-0610 • Fax: (609) 520-0638  
www.oss.goodrich.com • su\_sales@goodrich.com

## MECHANICAL

Model:	Enclosed	OEM
Module (no lens)	2.1 x 2.1 x 2.3 inches	1.64 x 1.5 x 1.5 inches
Width x Height x Depth	54 x 54 x 58 mm	42 x 38 x 38 mm
Weight (no lens)	< 270 g	< 90 g
Pixel Pitch	40 $\mu$ m	
Focal Plane Array Format	320 x 240 pixels	
Active Area	12.8 mm x 9.6 mm x 16 mm diagonal	
Lens Mount	C-mount	
Included Lens	f/1.4, 25 mm, 28° horizontal FOV, C-mount	

## ENVIRONMENTAL & POWER

Operating Temperature	-10°C to 40°C
Storage Temperature	-10°C to 60°C
Humidity	Non-condensing
Power Requirements:	
AC Adapter Supplied	100-240 VAC, 47-63 Hz
DC (Voltage/Current)	7-16 V/<1.6 W at 20°C ambient
Nominal Current Draw	0.13 A @ 12V, 25°C ambient
Connector (Standard version)	3M SDR Connector

## ELECTRICAL SPECIFICATIONS

Optical Fill Factor	> 100%
Spectral Response	900 nm to 1700 nm
Quantum Efficiency	> 65 % from 1000 nm to 1600 nm
Mean Detectivity, $D^* \text{ }^1$	> $4 \times 10^{13} \text{ cm}^2/\text{Hz}/\text{W}$
Noise Equivalent Irradiance $^1$	< $3 \times 10^8 \text{ photons}/\text{cm}^2\cdot\text{s}$
Noise (RMS)	< 50 electrons
Full Well	> $5 \times 10^4$ electrons
True Dynamic Range	> 1000:1
Operability $^2$	> 99%
Exposure Times	127 $\mu$ s to 16.27 ms in 16 steps
Image Correction	2-point (offset and gain) pixel by pixel, user selectable
Digital Output Format	12 bit Camera Link <sup>®</sup> (optional for OEM version)
Analog Output Format	Buffered EIA170 compatible video, 30 fps (both versions)
Digital Output Frame Rate	60 fps
Scan Mode	Continuous or triggered

<sup>1</sup>  $\lambda = 1550 \text{ nm}$ , exposure time = 16.3 ms (no lens) with gain and offset corrections off.

<sup>2</sup> The fraction of pixels with responsivity deviation less than 30% from the mean.