


Billet Shorty Antenna Installation

Using a wrench or adjustable wrench, remove the factory antenna.



Install the new Billet Antenna and place a piece of rubber hose over the antenna as pictured. Tighten with a pair of pliers. The rubber hose will protect the antenna while tightening.

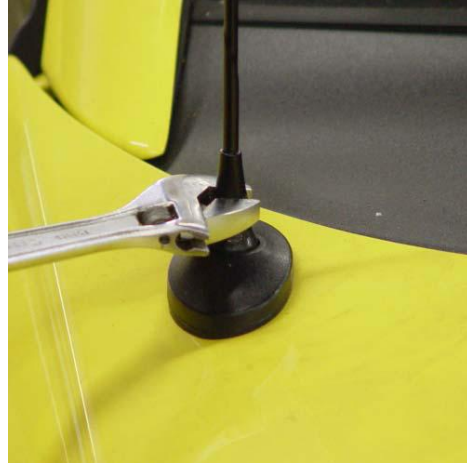

The new Billet Antenna Installed.

