

Un-Managed Platform FMC-CH08

Un-Managed 8 Slots Media Converter Center




The FMC-CH08 is a 2U high 10" chassis that supports up to 8 non-managed FMC media converters. The FMC-CH08 provides an economic solution in medium density fiber converter installations where no management features are required. Each FMC converter is an independent Ethernet fiber media converter and may be used as a stand-alone converter or placed in the FMC-CH08 chassis. When two chassis are connected in tandem, they fit exactly into a 2U 19" rack space. With its three built-in power options of universal AC (100-240VAC), DC 18-36VDC or DC 36-72VDC, the FMC-CH08 provides the working DC voltages for up to 8 FMC converters. The built-in cooling fan ensures that temperatures in the rack remain within the tolerated working range.

Features

- 2U, 10 (or 19) inch RACK supports up to 8 FMC units standalone units
- Chassis with single built-in power available in AC or DC models. Cross flow cooling fan built-in.
- Designed for rack mounting in single or tandem (2 chassis) configuration.

Application

CO (Rack) to CPE (Stand-alone)
~ In-Band Management ~

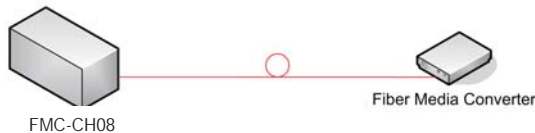

Specifications

- Temperature: 0 - 50° C (Operating);
0 - 70° C (Storage).
- Humidity: 20-80% non-condensing (Operating);
10-90% (Storage).
- Power: Input: 90-250VAC
24VDC Input, 18-36VDC ;
48VDC Input, 36-72VDC
- Dimensions: 178.7mm x 251.6mm x 88mm (LxWxH).
- Power Consumption: < 40W (8-slot fully loaded)
- Compliance: FCC part 15, Subpart B, Class A,
ANSI C63.4:2003
CE EN55022:2006, Class A
EN55024:1998+A1:2001+A2:2003
LVD: EN 60 950-1:2001
- MTBF: 65,000 h (25°C)

Ordering Information

- **FMC-CH08-AC** 8 slots FMC Rack with Internal AC 100 ~ 240V
- **FMC-CH08-DC24** 8 slots FMC Rack with Internal DC 24V
- **FMC-CH08-DC48** 8 slots FMC Rack with Internal DC 48V



tel: +886 2659-1021 info@ctcu.com
fax: +886 2659-0237 support@ctcu.com
sales@ctcu.com www.ctcu.com