

# ANSI/TIA/EIA 568 Category 6


## Outdoor UV Res Cable

ISO/IEC 11801

Part Number: 6NF4+

4 Twisted Pair Flooded Cable

### 4 Twisted Pair Flooded Cable

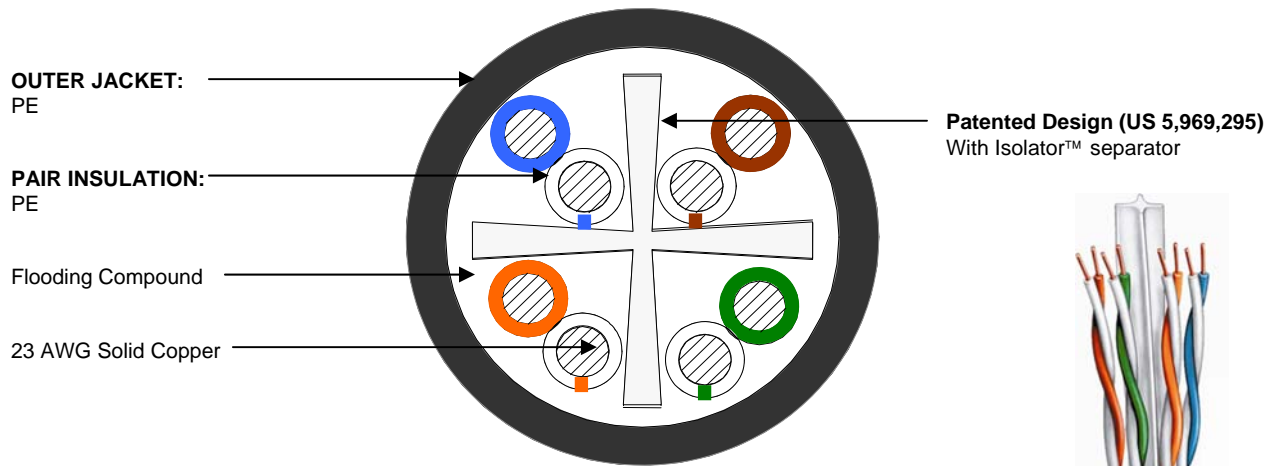

#### Pair Identification

Pair 1	Blue/White w/Co-Extruded Blue Stripe on White Single
Pair 2	Orange/White w/Co-Extruded Orange Stripe on White Single
Pair 3	Green/White w/Co-Extruded Green Stripe on White Single
Pair 4	Brown/White w/Co-Extruded Brown Stripe on White Single

#### Mechanical Specification

Nominal Jacket OD	0.250"
Nominal Jacket Thickness	0.020"
Jacket Minimum Spot Thickness	0.018"
Installation Temperature 0°C to 60°C	
Operation Temperature -40°C to 70°C	

Available Packaging: Box or Reel

Available Colors: Black



**ANSI/TIA/EIA 568 Category 6  
Outdoor UV Res Cable  
ISO/IEC 11801  
Part Number: 6NF4+  
4 Twisted Pair Flooded Cable**



1100 CommScope Place SE  
PO Box 1729  
Hickory, NC 28603-1729

(800) 982-1708  
(828) 324-2200

Fax: (828) 328-3400  
Int'l Fax: (828) 323-4989

www.commscope.com



**Electrical Performance**

Frequency MHz	Attenuation (dB/100m)	Near End Cross Talk (dB)	ACR (dB/100m) Min	Power Sum (dB)			ELFEXT (dB/100m) Min	Return Loss (dB)	
				NEXT Min	ELFEXT Min	ACR Min		CommScope Min	EIA/TIA 568 Category 6
1.0	2.0	75.3	72.3	72.3	64.8	70.3	67.8	23.0	20.0
4.0	3.8	66.3	61.5	63.3	52.8	59.5	55.8	23.0	23.0
8.0	5.3	61.8	55.4	58.8	46.7	53.4	49.7	24.5	24.5
10.0	6.0	60.3	53.3	57.3	44.8	51.3	47.8	25.0	25.0
16.0	7.6	57.3	48.7	54.2	40.7	46.7	43.7	25.0	25.0
20.0	8.5	55.8	46.3	52.8	38.8	44.3	41.8	25.0	25.0
25.0	9.5	54.3	43.8	51.3	36.8	41.8	39.8	24.3	24.3
31.25	10.7	52.9	41.2	49.9	34.9	39.2	37.9	23.6	23.6
62.5	15.4	48.4	32.0	45.4	28.9	30.0	31.9	23.0	21.5
100.0	19.8	45.3	24.5	42.3	24.8	22.5	27.8	23.0	20.1
155.0	25.2	42.5	16.2	39.4	21.0	14.2	24.0	21.0	18.8
200.0	29.0	40.8	10.7	37.8	18.8	8.7	21.8	21.0	18.0
250.0	32.8	39.3	5.4	36.3	16.8	3.4	19.8	20.0	17.3

(All tests include swept frequency measurements)

Capacitance	4.6 nF/100m nominal
DC Resistance/Unbalance	8.16 ohms/100m Max/ 2.5% Max
Dielectric Breakdown	2500 Volts DC Conductor to Conductor
Propagation Delay Skew	≤ 45ns/100m
Nominal Velocity of Propagation, NVP	61.7%

Cables are specified with a 5% allowance on propagation delay to the TIA/EIA 568.B.2-1 specification, due to water proofing agents.



Drawings not to Scale  
Specifications subject to change  
Revision: 11/03/09