
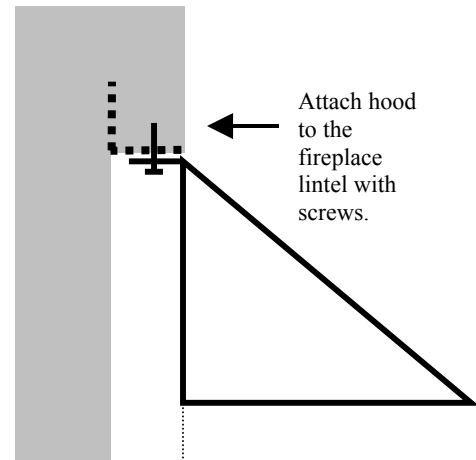
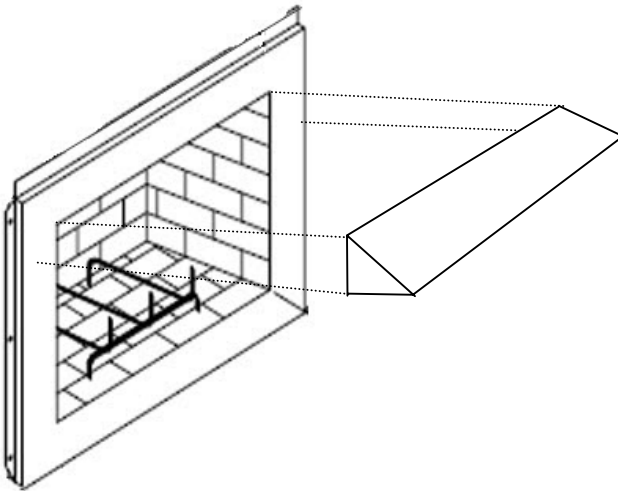


Elite Fireplace Facings

PO Box 16124
Shawnee Mission, KS 66203

Installation Instructions for ESHL - Square-end Lintel-mount Hood

1. Place the hood under the lintel and mark where to drill the mounting holes.
2. Drill 1/8" pilot holes where you marked.
3. Remove all protective film from the hood.
4. Attach the hood to the lintel using the self-tapping screws included.
5. Wipe hood with a soft polishing cloth to remove any fingerprints.

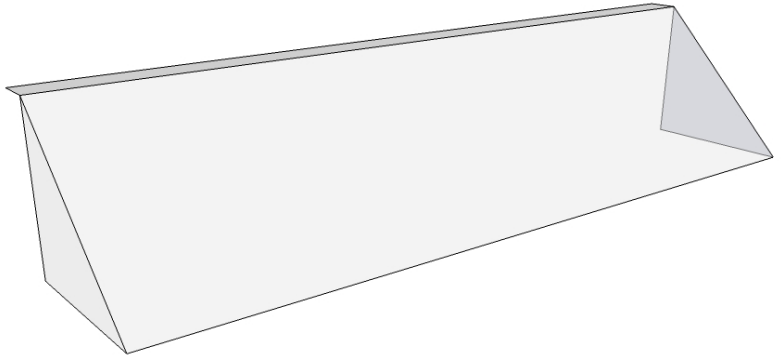

WARRANTY

Elite Fireplace Facings, Inc. makes no warranty, either expressed or implied, regarding its facings or hoods, and especially does not warrant its fitness for any particular purpose or merchantability. No officer, employee, agent, representative, or distributor of Elite Fireplace Facings, Inc. has the authority to change or modify this warranty either orally or in writing. **Elite Fireplace Facings, Inc. shall not be liable for any incidental or consequential damages arising or alleged to have arisen by the use or installation of this product.**
