


MINI DEMAND PUMPS

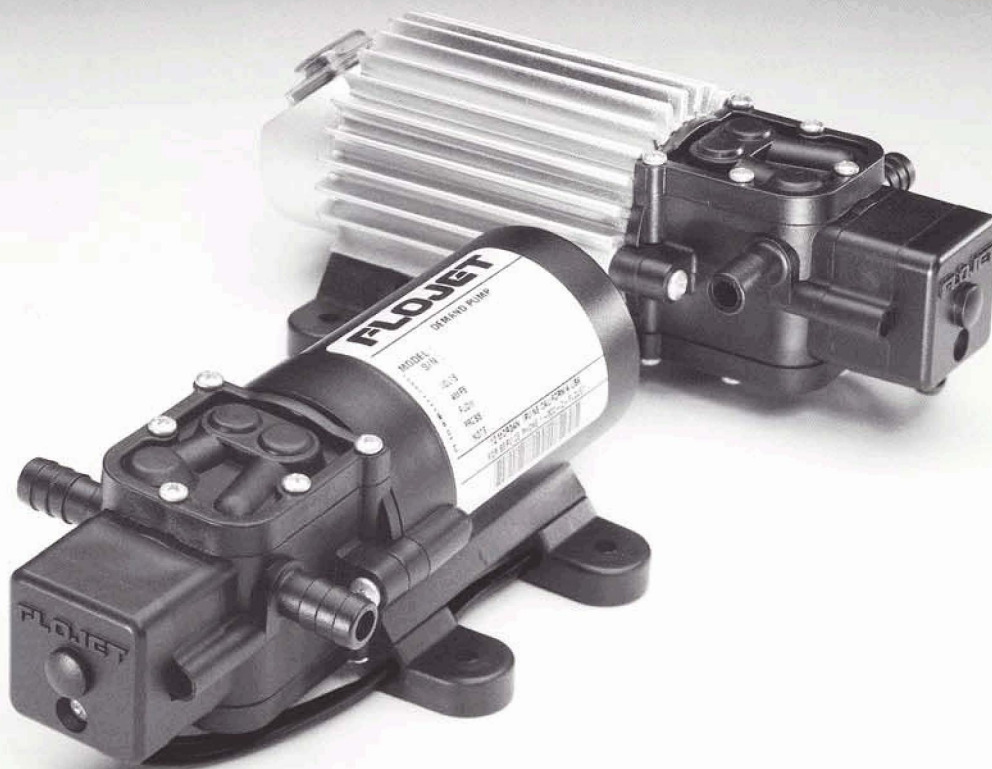

LF 12

Duplex Diaphragm Design

- Compact Design Measuring 6.4" (162 mm) in Length
- Fully Automatic Demand Pump
- Self-priming and Can Operate Dry Without Damage
- Built-in Thermal Protector
- Sealed Pressure Switch and Motor
- Flow Rates to 1.0 GPM (3.8 L/min.) and Operating Pressures to 25 PSI (1.7 bar)

LF 11

Duplex Diaphragm Design *with Fin Cooled Motor*

- Compact Design Measuring 6.8" (173 mm) in Length
- Fully Automatic Demand Pump
- Sealed External On/Off Switch
- Self-priming and Can Operate Dry Without Damage
- Sealed Motor with Protective Cooling Fin Cover and Fuse
- Flow Rates to 1.0 GPM (3.8 L/min.) and Operating Pressures to 25 PSI (1.7 bar)

FLOJET

