


### UP Comfort System

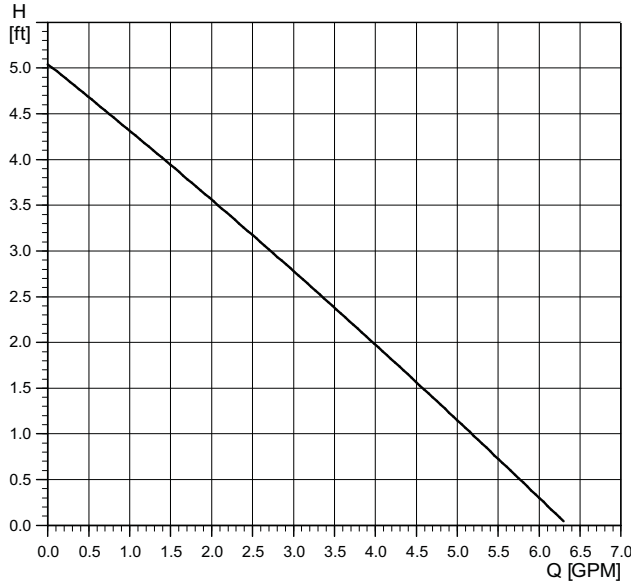

Flow range: 0-6.3 gpm  
 Head range: 0-5.1 feet  
 Motors: 2-pole, single-phase  
 Max. liquid temperature: 150 °F (66 °C)  
 Min. liquid temperature: 36 °F (2 °C)  
 Max. system pressure: 145 psi (10 bar)  
 Open system


| Model             | Volts | Amps | Watts | Hp   | Capacitor |
|-------------------|-------|------|-------|------|-----------|
| UP 15-10 SU7P/TLC | 115   | 0.23 | 25    | 1/25 | 2µF/400 V |

#### Approvals




TM03 5547 3806

UP 15-10 SU7P/TLC

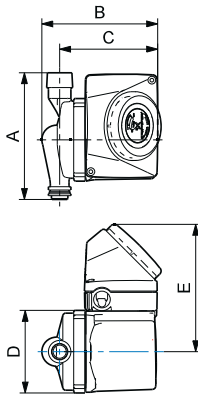

TM03 4362 3507

Comfort Valve®

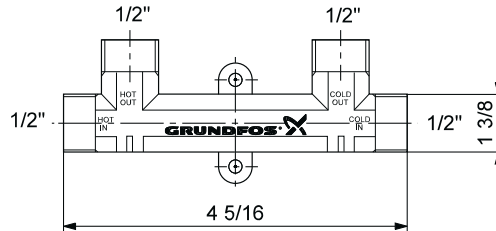

TM03 4363 3507

| Model type        | Product number | Dimensions [inches] |       |       |        |       |   | Connection type and size                   | Shipping weight [lbs] |
|-------------------|----------------|---------------------|-------|-------|--------|-------|---|--|-----------------------|
|                   |                | A                   | B     | C     | D      | E     | F |  |                       |
| UP 15-10 SU7P/TLC | 595916         | 5 7/16              | 6 1/4 | 5 1/2 | 3 7/16 | 3 1/4 | 4 | 3/4" M x 3/4" F NPT                        | 5.5                   |
| Comfort Valve     | 595926         | -                   | -     | -     | -      | -     | - | 1/2" M NPS (1/2" faucet)                   | 2.8                   |
| Flex hose kit     | 599390         | -                   | -     | -     | -      | -     | - | (2) 1/2" FNPS X 1/2" FNPS X 12" flex hoses | -                     |

| Model type         | Product number | Description   |
|--------------------|----------------|---|
| Comfort Valves     | 595926         | Box of 15 pieces  |
| Comfort series kit | 595916         | 1 pump and 1 valve,<br>(2) 1/2" FNPS X 1/2" FNPS X 12" flex hoses |

**Note:** All models have a 10 ft (3 m), 3-prong power cord.  
 Dimensions in inches unless otherwise noted.