



Installing Cushions to Beam Seating Units

Cushions are attached to seating by self-threading wood screws for easy replacement in case of excessive wear or damage.

Profile of Seat Cushion

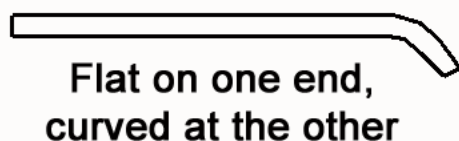

Profile of Back Cushion

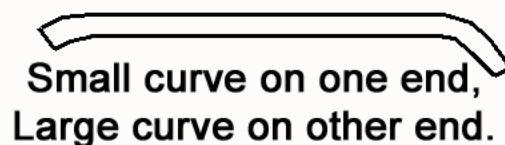

1.) Begin with Back Cushions. 4 screws are used per cushion. Align each cushion with Large Curve towards the top of backrest. With one hand holding the cushion in position, connect one screw through perforations in back of seating unit into the upper left and right corners. Next, connect screws to lower left and right corners.

2.) Continue as above with each back cushion. When completed, if any appear out of line, they can easily be repositioned using the many holes in the chair backrest.

3.) Tip the entire beam seating unit on its back side for connection of the seat cushions.

4.) The seat curvature will be positioned toward the front edge of the seat. Using 4 screws, attach in same manner as back cushions.

