PCA® Spray
Faucet Attachment - 0.35 gpm max
Pressure Compensating **Regular Size**

NEOPERL®
flow, stop and go®

Features and Benefits

- Pressure compensating for constant flow from 20 to 80 psi.
- Provides non-splashing, non-aerated spray.
- Anti-clogging dome screen filters sediment and particles.
- Color-coded to identify flow rate.
- Virtually unbreakable single piece insert ensures a longer useable life.
- Also compatible with regular and vandal proof M22 and M24 metric housings.
- Available housing finishes: unplated, chrome and PVD.
- Laser marked housings: statutory mark and custom logo.
- Rubber washer.
- Delivers a flow rate 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED® points in green buildings.

LEED is a registered trademark of the US Green Building Council.

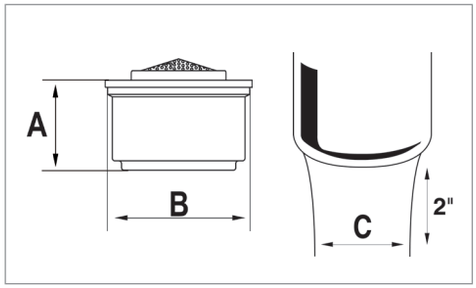

Certification

ANSI/NSF 61

Part Number & Packing

Designation	Part #	Packing
Insert only	A5.9041.1	3000
Regular male 15/16"-27	40.7068.613	500
Regular female 55/64"-27	40.7068.623	500
Reg. dual thread 15/16"-27 55/64"-27	40.7068.673	500
Vandal proof regular male 15/16"-27	40.7068.723	400
Vandal proof regular female 55/64"-27	40.7068.733	400
Vandal proof dual thread	40.7068.763	400
Vandal key	BX.399C.1	

*Other combinations also available

Color Code

Dome: White	Diffuser: Brown	Basket: Dark Gray

Flow Rate Curve

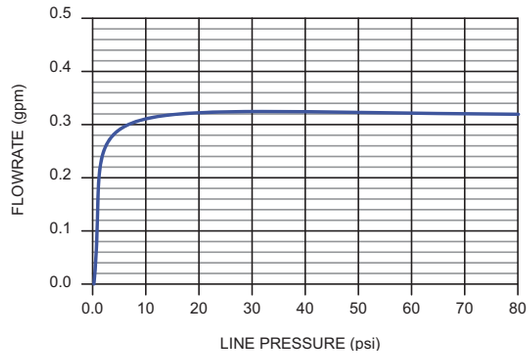

Dimensions

No	mm	In
A	13.00	.512
B	19.95	.785
C	≈ 25	≈ 1

Housings

Regular Male

Regular Female

VP Male

VP Female

Technical Data

Materials:	Body	Acetal
	O-ring	EPDM
	Washer	EPDM
Working temperature:		150°F
Working pressure:		125 psi