Hankison MM1F Mist Eliminator replacement filter element

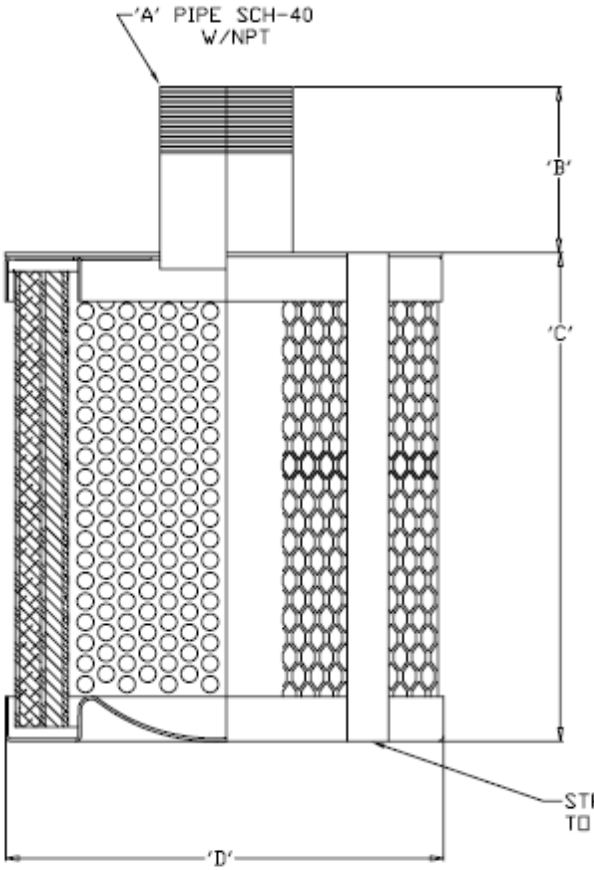

OEM NUMBER	CFM RATING @ 100 PSIG	'A'	'B'	'C'	'D'
HANKISON-MM1F	125	2.00	2.75	8.00	10.63
HANKISON-MM2F	250	2.00	2.75	12.00	10.63
HANKISON-MM3F	500	2.50	2.75	24.00	10.63
	500	2.00	2.75	24.00	10.63
	800	2.50	2.75	38.00	10.63
HANKISON-MM4F	1100	4.00	3.25	42.00	11.83
HANKISON-MM5F	1500	4.00	3.25	42.00	14.75
HANKISON-MM6F	1900	4.00	3.25	32.00	19.00
HANKISON-MM7F	2400	4.00	3.25	44.00	19.00
HANKISON-MM8F	3000	4.00	3.25	54.00	19.00

NOTES:
1. SEPARATOR ELEMENT FOR REMOVAL OF LUBRICATION OIL MIST FROM THE DISCHARGE OF A ROTARY OR CENTRIFUGAL COMPRESSOR.
2. MAXIMUM OPERATION TEMPERATURE: 230 DEG F.
3. NO UNSTABLE PVC IS PRESENT IN THIS ASSEMBLY.
4. ALL METAL COMPONENTS ARE ZINC PLATED OR CARBON STEEL WITH HIGH HEAT COATING.

PERFORMANCE AT RATED FLOWS
1. CLEAN DRY PRESSURE DIFFERENTIAL---<1 PSID

2. PARTICULAGE REMOVAL
   .1 MICRON---99.98%
   1 MICRON---99.99%
   >3 MICRON---100%

3. OIL CARRYOVER:

OIL CHALLENGE	OIL CARRYOVER
0-100 ppmw	<.5 ppmw
100-600 ppmw	< 1 ppmw
>600 ppmw	1-3 ppmw

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS ±1/8 DECIMALS .XX ± .03 ANGLES ±2°
FLATNESS MUST BE WITHIN: .02

DATE	REVISION	CHANGES
A	7/20/07	ADDED PERFORMANCE NOTES

www.Millennium-Filters.com 24855 NOVI ROAD NOVI, MI 48375 PH: 888-562-0001 *fax* 248-869-6090 contact@millennium-filters.com