

REVISION	DATE	JAYPRO NO.
A		
		CUST. NO.
	DATE	
	10-10-97	

**OCV-900**  
**ECONOMY 3 1/2" DIA. STEEL**  
**VOLLEYBALL SYSTEM - OUTDOOR**

THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, INC.  
 AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

"Creating the Standard in Athletic Equipment"

DRAWING BY **dds**

D#

DRAWING NO.  
**OCV-900**

**Jaypro**

976 Hartford Turnpike  
 Waterford, CT 06385

SIDELINE ANTENNAE (VBA-30A)  
 AND BOUNDARY TAPE (VA-22)  
 (OPTIONAL; NOT INCLUDED  
 WITH SYSTEM)

PVBN-1 TOP CABLE NET (OPTIONAL;  
 NOT INCLUDED WITH SYSTEM)

WELDED D-RINGS FOR  
 ATTACHING NET TOP  
 CABLE (MENS' & WOMEN'S)

SNAP BUCKLES  
 QUICKLY FASTEN  
 NET TO UPRIGHTS

RATCHET CABLE WINCH  
 TO TENSION NET

3 1/2" DIA. STEEL ANCHOR UPRIGHT  
 (OCV902)


3 1/2" DIA STEEL WINCH UPRIGHT  
 (OCV901)

3 1/2" 3-PIECE PLUG  
 (AF1213A)

3 1/2" I.D. GROUND SLEEVE  
 (OCV-900G)

PLAYING SURFACE LEVEL

SNAP BUCKLE ALLOWS FOR  
 QUICK NET ASSEMBLY TO UPRIGHT

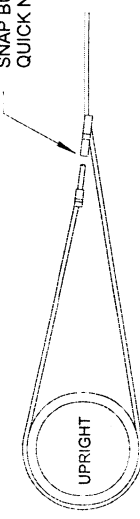

COPYRIGHT 1987 JAYPRO  
 SPORTS, INC. ALL RIGHTS  
 RESERVED

# JAYPRO MODEL OCV-900

## 3 " DIAMETER STEEL OUTDOOR VOLLEYBALL SYSTEM

System shall consist of one winch upright and one anchor upright and shall be supplied with a tensioning winch and strap. Uprights are intended to fit snugly into 3.570" I.D. rigid aluminum x 36" deep floor sleeves. (Model No. OCV-900G)

Uprights shall provide men's and women's net height settings by means of twin welded roller tabs on the winch upright and twin welded "D"-rings on the anchor end. Uprights shall be constructed of 3 1/2" O.D. x .187"w galvanized steel tubing.

Tensioning system shall consist of a ratchet-type winch and include an attached 2" high strength nylon web tensioning strap. Uprights shall have attached rubber feet to protect finished floors during transport. All hardware shall be zinc-plated.