


SPORTABLE SCOREBOARDS®

PRODUCT SPECIFICATIONS FOR

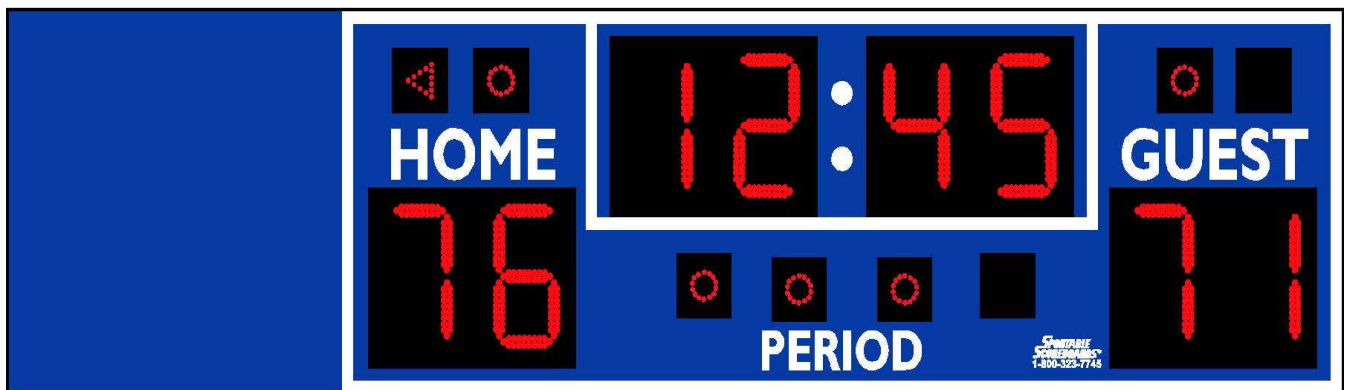

MODEL 2218LED

www.sportablescoreboards.com

SPORTABLE SCOREBOARDS
106 Max Hurt Drive
Murray, KY 42071
Phone: 1-800-323-7745 Fax: 270-759-4112



SCOREBOARD SPECIFICATIONS

MODEL 2218LED

Lead your team with this basketball scoreboard! Large 9" high super-bright 100,000-hour rated LED numerals are the largest with the widest viewing angle in the industry and are visible over 300 feet. The 22-gauge galvanized steel cabinet with powder-coat finish means your scoreboard is the most durable on the market and will look brand new for many years! Scoreboard package includes: operator's keyboard, junction box cover/cable (cable models only), and an installation manual shipped with the scoreboard.

OVERALL DIMENSIONS

8' L x 2' W x 8" D

WEIGHT

Hanging weight: 110 lbs
Shipping weight: 135 lbs

CONSTRUCTION

22-gauge galvanized steel cabinet with powder coat finish for strength, durability, and lasting appearance

POWER REQUIREMENTS

Scoreboard:

(1) 20-amp, 120-volt, 60-hertz, grounded AC circuit connected to an ON/OFF switch and/or circuit breaker

Controller:

Standard LCD controller powered by 12V DC Adapter or an optional internal battery

SCORING INFORMATION DISPLAYED

HOME and GUEST: 3 - digit displays, 0-199

CLOCK: 4 - digit displays, counts up or down, 99:59-00:00 or 00:00-99:59

PERIOD: 4 - 2" dot indicators

BONUS: 2 – 2" dot indicators

POSSESSION: 2 – 2" arrow indicators

CAPTIONS (Height)

HOME and GUEST: 4"

CLOCK COLON: 1.5"

PERIOD: 2.5"

Polymeric Calendared Vinyl Lettering

HOME and GUEST, and CLOCK Displays

9" digits, 160° visibility, red, 100,000 hour-rated, indoor super-bright LED (light emitting diode) displays

PERIOD, BONUS and POSSESSION Indicators

2.0" LED dot/arrow indicators, 160° visibility, red, 100,000 hour-rated, indoor super-bright LED (light emitting diode) displays

APPROVALS

ETL/CSA listed

Scoreboard: Meets all FCC Class A requirements

900 MHz wireless transmitter: FCC Part 15 certified

900 MHz wireless receiver: Meets all FCC Part 15 requirements

WARRANTY

This product is warranted against defects in materials and workmanship for the period specified in the warranty from the date of invoice. The complete warranty details are included on the CD shipped with each unit.

SERVICE

Technical Support is available 24 hours a day, 7 days a week @ 1-800-411-3136.

INSTALLATION

This model may be wall mounted or suspended from the ceiling.

Support structure and mounting hardware supplied by installer/others

SCOREBOARD CONTROLLER

Dimensions: 6" L x 7" W x 1.25" x 2.25" tapered D

Weight: 1.0 lb

The keyboard controller available with this scoreboard is microprocessor-controlled, molded of high-impact ABS plastic, has a tactile membrane keypad. Options include 900 MHz wireless control and internal battery pack with automatic battery charger.

Cable-Controlled System (standard) Includes:

- (1) Hand held controller
- (3) BASKETBALL keypad inserts
- (1) Junction box cover with receptacle (to be installed at scorekeeper's location)
- (1) 20-ft. signal cable (used to connect the keyboard to the junction box receptacle)
- (1) Project-specific length of 4 wire twisted pair, shielded control cable

900 MHz Wireless System (optional) Includes:

- (1) Universal LCD keyboard controller
- (3) BASKETBALL keypad inserts
- (1) 12-volt DC wall transformer
- (1) 900 MHz transmitter (connects to keyboard controller via supplied interface cable)
- (1) 900 MHz receiver (connects to the scoreboard, eliminating control cable and junction box installation)

OPTIONS

- Wireless Remote Control Battery Option (charger included)
- Sponsor Panels
- Scoreboard Protective Net
- 10-Year Limited Warranty