

CONFIDENTIAL. THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF COOPER INDUSTRIES, INC. IT IS NOT FOR PUBLIC DISCLOSURE. POSSESSION OF THE INFORMATION DOES NOT CONVEY ANY RIGHT TO LOAN, SELL OR DISCLOSE THE INFORMATION. UNAUTHORIZED REPRODUCTION OR USE OF THE INFORMATION IS PROHIBITED. THIS DOCUMENT IS TO BE RETURNED TO COOPER INDUSTRIES, INC. UPON COMPLETION OF THE PURPOSE FOR WHICH IT IS LOANED OR UPON REQUEST.

COPYRIGHT Cooper Industries, Inc.
This is an unpublished work. The disclosure of this work is limited to select personnel. Further dissemination or disclosure to the public is PROHIBITED. This unpublished work is protected by Federal Copyright law and all rights thereunder are reserved by Cooper Industries, Inc.

SCALE
2x


UNLESS OTHERWISE SPECIFIED TOLERANCES TO BE:
METRIC ±.13mm
INCHES ±.005"
ANGULAR ±2°

THIRD ANGLE PROJECTION

INDICATES CRITICAL DIMENSION OR FEATURE

DATE 6-15-05	NO. FMX-(AMP)
TITLE FEMALE MAXI FUSE	
SUP. NO. FMX-(AMP)	DATED 12-4-03
DWG. CEM	CK. D
PAGE 1 OF 2	
REV. J04468	
COOPER Bussmann	
St. Louis, MO 63178	
C/F NO. 65687	DISTRIBUTION 56 J

INCHES (OR U.S. UNITS) IS THE PRIMARY UNIT OF MEASURE
METRIC(mm)
[INCHES]

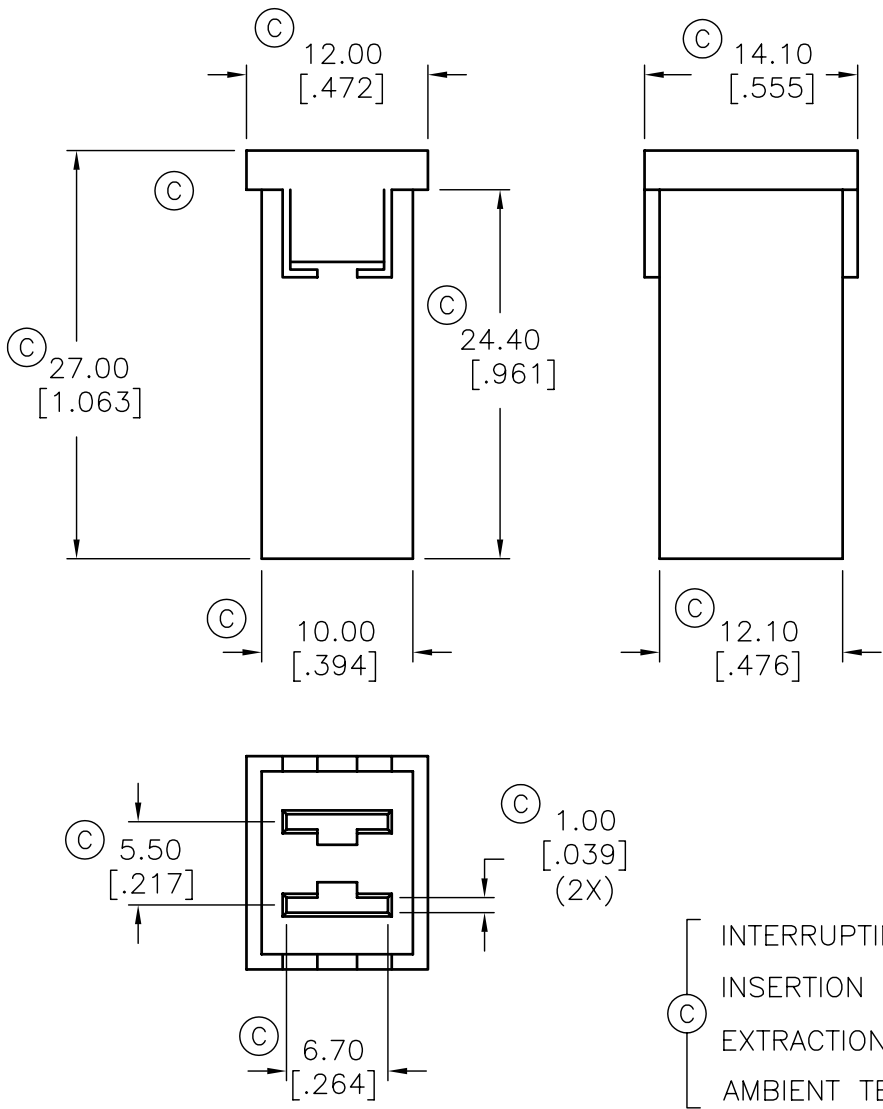

INTERRUPTING RATING: 1000A @ 32V DC
 INSERTION FORCE: 53N MAX. (12 lb)
 EXTRACTION FORCE: 9N MIN. (2 lb)
 AMBIENT TEMPERATURE: -40°C TO 125°C

AMP	CATALOG NO.	BODY COLOR	RATED VOLTAGE
20	FMX-20	LIGHT BLUE	32
30	FMX-30	PINK	
40	FMX-40	GREEN	
50	FMX-50	RED	
60	FMX-60	YELLOW	

ELECTRICAL CHARACTERISTICS	
110%	MIN 100 h
135%	MIN 60s MAX 1800s
200%	MIN 4s MAX 60s
350%	MIN .20s MAX 7s
600%	MIN .15s MAX 1s

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY
 (D) REG. PACKAGING SPECIFICATION #1P2117
 (B) BULK PACKAGING SPECIFICATION #1P0652