

Battery Separators

Eaton's battery separators manage multiple battery banks by combining all batteries during charging cycles and separating primary and auxiliary batteries during discharge cycles.

Features & Benefits

- Designed for use in multi-battery applications as a solenoid priority system
- Allows multiple batteries to be charged from one charging source
- Prioritized charging, charges primary battery and then remaining batteries
- Uni-directional: charge two batteries from two sources
- Interconnect/controller: can be used as a uni-directional separator, or low voltage disconnect (LVD), where the solenoid opens when battery voltage drops too low, or an isolator/interconnect, which provides isolated charging of two batteries from one source
- Isolates batteries when fully charged
- Protection circuitry absorbs coil generated voltage spikes
- Prevents charging system overload
- Start assist feature parallels batteries for added power during start
- Universally suited for mounting on tow vehicles


Options

The battery separator has a built in "jump start" feature option. Connect the start signal to the start input and the battery separator will parallel the primary and auxiliary batteries when the starter motor is cranked, but only if the auxiliary battery has sufficient voltage to assist with the start. The battery separator provides a lamp driver output if the operator wants to know when the jump start feature is functioning.



Part #	Input (V)	Current (A)	Description
1314A	12	100	Battery separator, uni-directional w/ aux start
1314-200	12	200	Battery separator, uni-directional w/ aux start
1315A	12	100	Battery separator, bi-directional w/ aux start
1315-200	12	200	Battery separator, bi-directional w/ aux start
1318A	24	100	Battery separator, uni-directional
1319A	24	100	Battery separator, bi-directional

Dimensions in Inches (mm)

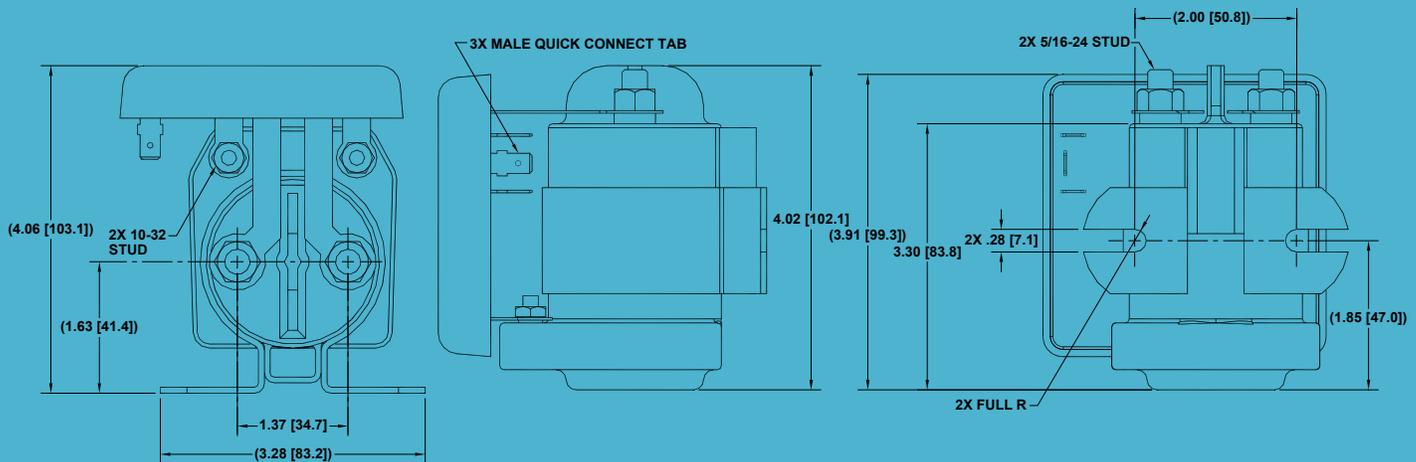

Note: 200A model shown