




LIGHTWEIGHT INSULATED ALUMINUM ACCESS DOOR

FOR ALL SURFACE TYPES


PAL


LEED ready: This product contributes to LEED* credits.

INSTALLATION

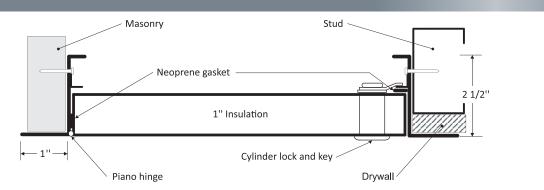

DIMENSIONS AND APPEARANCE







DESCRIPTION AND MATERIAL SPECIFICATION

Material:0.064" aluminumInsulation:1" fiberglassHinge:aluminum continuous piano typeGasketing:neoprene all around perimeterLock / latch:cylinder lock and keyFinish:high quality white powder coat primerPackaging:individually wrapped, 1 per box

POPULAR OPTIONS:

Material:	stainless steel 304 #4 (brushed finish)
Lock / latch:	screwdriver operated cylinder cam latch, mortise slam latch preparation (cylinder optional), handle operated cam latch

PROJECT DATA

PROJECT NAME:	QTY	W	Н	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			