

# PCA Care®

## Laminar Stream - 1.5 gpm

Pressure compensating Regular Size

### Features and Benefits

- ⇒ Provides a splash free crystal clear (non aerated) stream.
- ⇒ Unique screenless 100% plastic Cascade® construction inhibits lime build up.
- ⇒ Color-coded to identify flow rate.
- ⇒ Recommended for use in medical facilities to prevent airborne bacteria from entering the water stream.
- ⇒ Pressure compensating for constant flow from 20 to 80 psi.
- ⇒ Virtually unbreakable single piece insert ensures a longer usable life.
- ⇒ Available housing finishes: chrome.
- ⇒ Laser marked housings: statutory mark and custom logo.
- ⇒ Rubber washer.

### Certification

ANSI/NSF 61

ASME A112.18.1M

WaterSense listed



### Designation & Thread Sizes


Designation	Thread Size
Insert only	
Regular male	15/16"-27
Regular female	55/64"-27
Regular dual thread	15/16"-27 x 55/64"-27
Regular male vandal proof	15/16"-27
Regular female vandal proof	55/64"-27
Regular dual thread vandal proof	15/16"-27 x 55/64"-27
Vandal key	

\*Other combinations also available

### Housings



Regular Male



Regular Male VP



Regular Female



Regular Female VP


### Insert Color Code

Dome: Orange	Diffuser: Gray	Basket: Gray
--------------	----------------	--------------




### Dimensions

No	mm	In
A	12.00	.472
B	20.05	.789
C	≈ 13	≈ 1/2

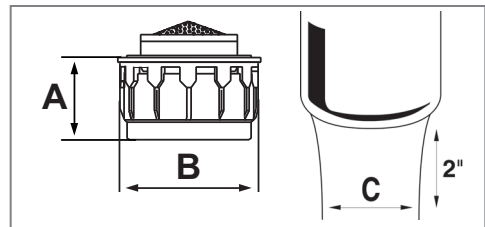

### Flow Rate Curve

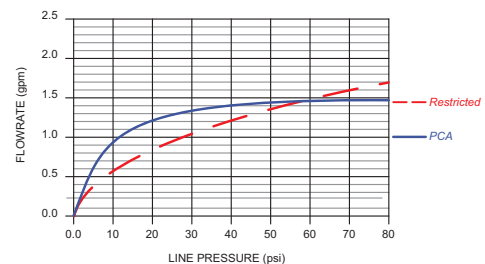

### Technical Data

Material:

Body Acetal  
O-ring EPDM  
Washer EPDM

Working temperature: 150°F  
Working pressure: 125 psi