



## 94-04 Hood Hinge Installation

1. Mount upper brackets with #12 screws. Drill 1/16 pilot hole as indicated in picture.

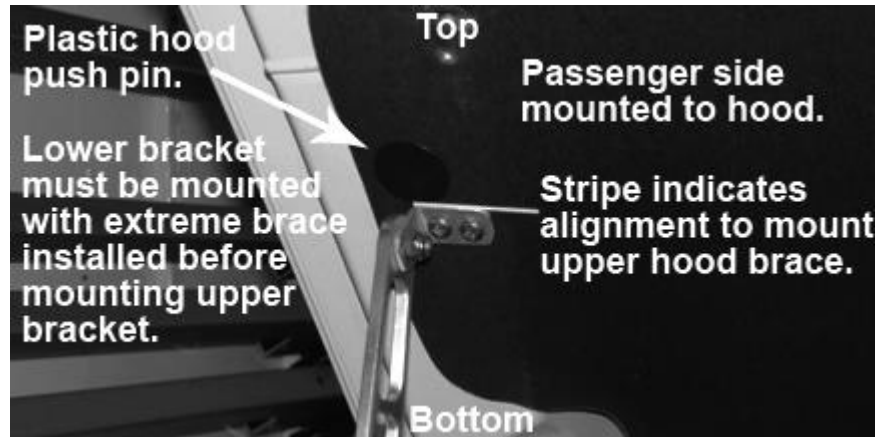

2. Mount lower brackets on inside fender ledge as indicated in picture.

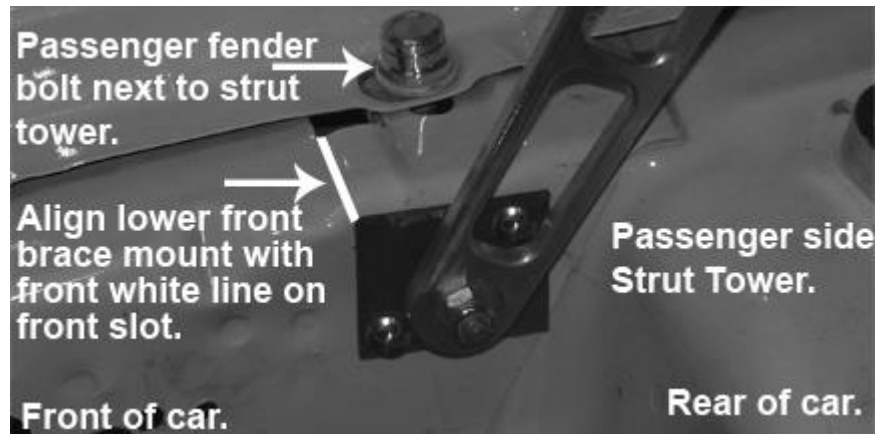

3. Mount hinge towards engine side of bracket by inserting ¼-20 x 5/8 screw through bracket from outside. Then place nylon washer on inside. Slip hinge ends over screws against nylon washer. Hinge must close towards front of car.
4. Thread nut on and tighten until play is removed but hinge still pivots freely.
5. Check for interference with brackets or cables and Reroute if necessary.